
## TREE & VEGETATION PROTECTION

## TREE PROTECTION FENCING AND SIGN

- 1. CHAIN LINK FENCE REQUIRED (NO ORANGE CONSTRUCTION FENCE OR PLYWOOD)
- 2. MINIMUM 6' HIGH
- 3. FENCE SHALL BE SUPPORTED BY RIGID POSTS DRIVEN INTO THE GROUND AT 8' MAXIMUM INTERVALS
- 4. MUST BE INSTALLED PRIOR TO DEMOLITION OR GROUND DISTURBANCE
- 5. KEPT IN PLACE FOR THE DURATION OF CONSTRUCTION
- 6. NO DUMPING OF ANY MATERIALS IN THE PROTECTION AREA
- 7. NO SOIL DISTURBANCE OR ACTIVITY ALLOWED WITHIN FENCED AREA: MATERIAL STORAGE/STOCKPILING. PARKING, EXCAVATION, DUMPING, DRIVEN FENCE-OR WASHING
- 8. MODIFICATIONS OF THESE MAX INTERVALS REQUIREMENTS BY APPROVAL OF SDCI PLANNER ONLY
- 9. IF ROOTS GREATER THAN 2 INCH FOUND OUTSIDE OF FENCING, PROTECT BY HAND EXCAVATION AND, IF NECESSARY, CUT CLEANLY AND KEEP MOIST
- 10. USE 3 INCHES OR DEEPER WOOD CHIP MULCH OUTSIDE FENCED AREAS TO PROTECT FEEDER ROOTS

VEGETATION PROTECTION (DOES NOT APPLY TO TREES)

- 1. ORANGE MESH OR SIMILAR OPEN MATERIAL
- 2. PROTECT VEGETATION OUTSIDE CONSTRUCTION ZONE WITH FENCING AS SHOWN

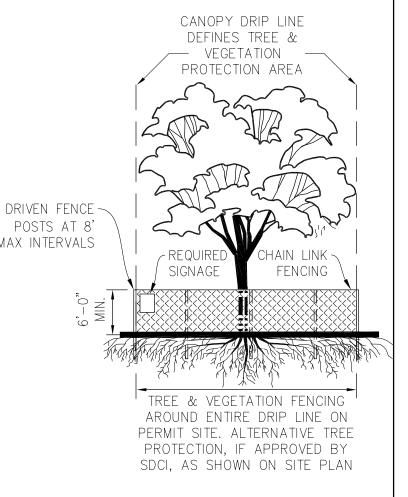

LINK TO REQUIRED TREE PROTECTION SIGNAGE:



