


DUMPSTER TRUCK SPECS.


Overall average height of rear load truck 11 ft. 7 inches

Length of rear load truck is 23.5 ft.

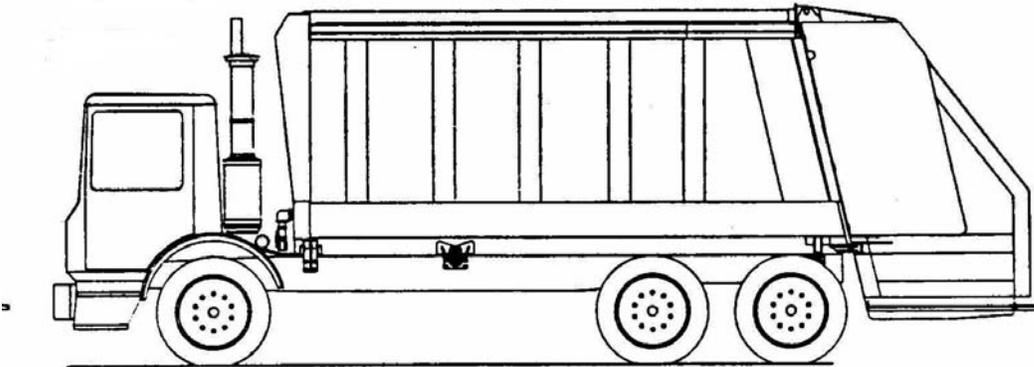

Overall average height of front load truck is 12ft. 6 inches

Length of front load Truck is 28.75 ft.

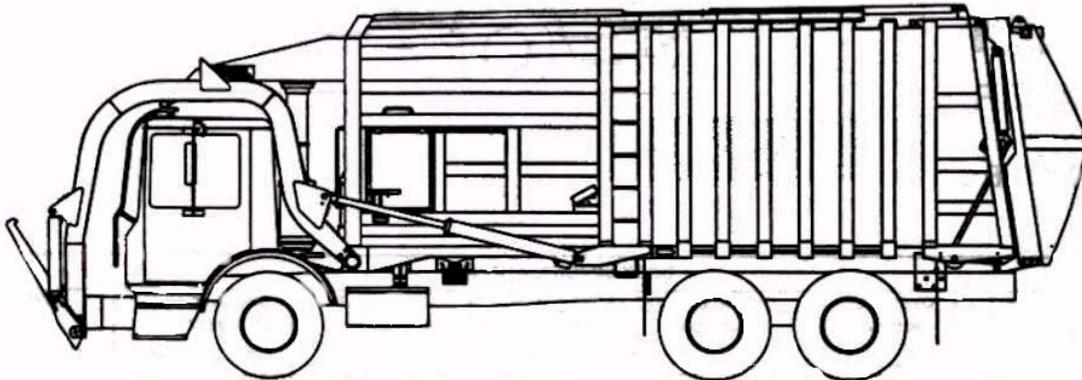

Foreman's Truck
Overall Height is 10 ft. 7 inches
Length is approx. 19 ft.

