

PROTECT



TREE



CONSTRUCTION NOTICE


Your Permit Approval is Based on Preserving This Tree and Protecting It From Construction Impacts

DO:

- Install a construction fence at the tree drip line or per your approved plans before starting work - this is the tree protection zone (TPZ)
- Keep the fence in place throughout construction

DO NOT:

- Change the ground level or mechanically clear the area within the TPZ - you may qualify for an exception based on an arborist's report
- Trench or compact soil within the TPZ
- Wash or rinse equipment in the TPZ
- Dump waste water in or around the TPZ
- Store any materials or soil within the TPZ
- Attach anything to the trunk or branches, such as nails, screws, spikes, scaffolding, etc.

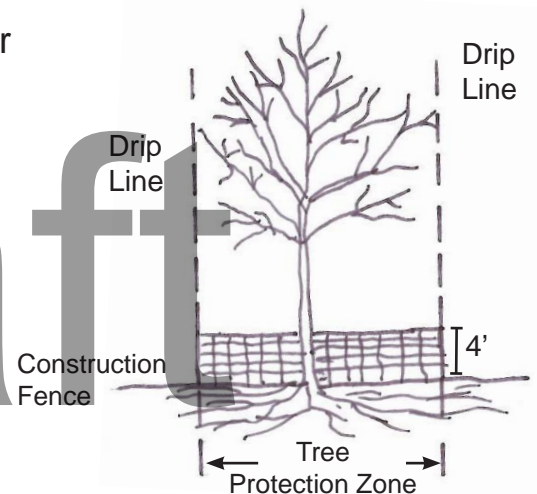


ROOTS - If you encounter roots outside the TPZ during excavation:

- Cleanly cut roots less than four inches in diameter - do not break them
- Do not cut roots greater than four inches in diameter - call the City to arrange an arborist's assessment
- Cover exposed roots and keep them moist

Branches - If you must remove low-hanging branches outside the TPZ:

- Cleanly cut them using the "three-cut" method to avoid tearing the bark
- Cut them back to the main stem or trunk
- Do not cut the branches flush with the trunk or stem
- Do not break the branches with your equipment

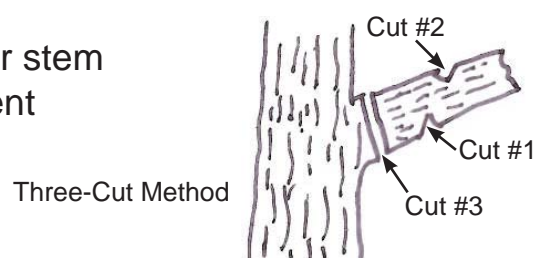

DO NOT REMOVE THIS SIGN UNTIL YOU HAVE FINISHED YOUR SITE WORK AND HAVE RECEIVED YOUR FINAL INSPECTION