

GENERAL NOTES

1. **This Exhibit must be printed in color to understand all details.**
2. Dimensions are approximate. Extent of work painted on the ground in the field. Contractor to verify extent of work prior to bidding.
3. Construction staging to take place on trail segments adjacent to work. Contractor to protect and maintain original trail condition of portion used for staging.
4. No repaving will take place in SDOT right-of-way.
5. Do not exceed 2% cross slope and a 5% running slope except as required to meet existing grades.

INDEX


| SHEET | TITLE |
|-------|---|
| 1 | COVER SHEET, INDEX, VICINITY MAP |
| 2 | GENERAL SITE LOCATION MAP (SITES 1-9) |
| 3 | GENERAL SITE LOCATION MAP (SITES 10-19 and 20-22) |
| 4 | SITE 1-3 LOCATION MAP |
| 5 | SITE 1-3 EXTENT MARKER PHOTOS |
| 6 | SITE 4-6 LOCATION MAP |
| 7 | SITE 4-6 EXTENT MARKER PHOTOS |
| 8 | SITE 7-9 LOCATION MAP |
| 9 | SITE 7-9 EXTENT MARKER PHOTOS |
| 10 | SITE 10-11 LOCATION MAP |
| 11 | SITE 10-11 EXTENT MARKER PHOTOS |
| 12 | SITE 12-15 LOCATION MAP |
| 13 | SITE 12-15 EXTENT MARKER PHOTOS |
| 14 | SITE 16-19 LOCATION MAP |
| 15 | SITE 16-19 EXTENT MARKER PHOTOS |
| 16 | SITE 20-23 LOCATION MAP |
| 17 | SITE 20-23 EXTENT MARKER PHOTOS |

TRAIL SEGMENTS

| SITE # | SEGEMENT | LENGTH | WIDTH | |
|--------|------------------------------|--------|-------|--------------------------------|
| 1 | Near 43rd Ave NE | 35' | 5.5' | |
| 2 | Between 43rd and 45th Ave NE | 115' | 5.5' | |
| 3 | Near 45th Ave NE | 98' | 5.5' | |
| 4 | Near Ann Arbor Ave NE | 145' | 10.5' | |
| 5 | South of NE 60th St | 20' | 10.5' | |
| 6 | Near NE 60th St | 7' | 10.5' | |
| 7 | North of NE 60th St | 30' | 10' | |
| 8 | Near 54th Ave NE | 70' | 10' | |
| 9 | South of NE 65th St | 60' | 10' | |
| 10 | Bollards South of NE 70th St | 10' | 10' | Not in Contract Work by Others |
| 11 | Bollards North of NE 70th St | 6' | 10' | Not in Contract Work by Others |
| 12 | North of NE 75th St | 108' | 10' | |

Note: Sites in red are not in the contract. The work will be done by others.

VICINITY MAP

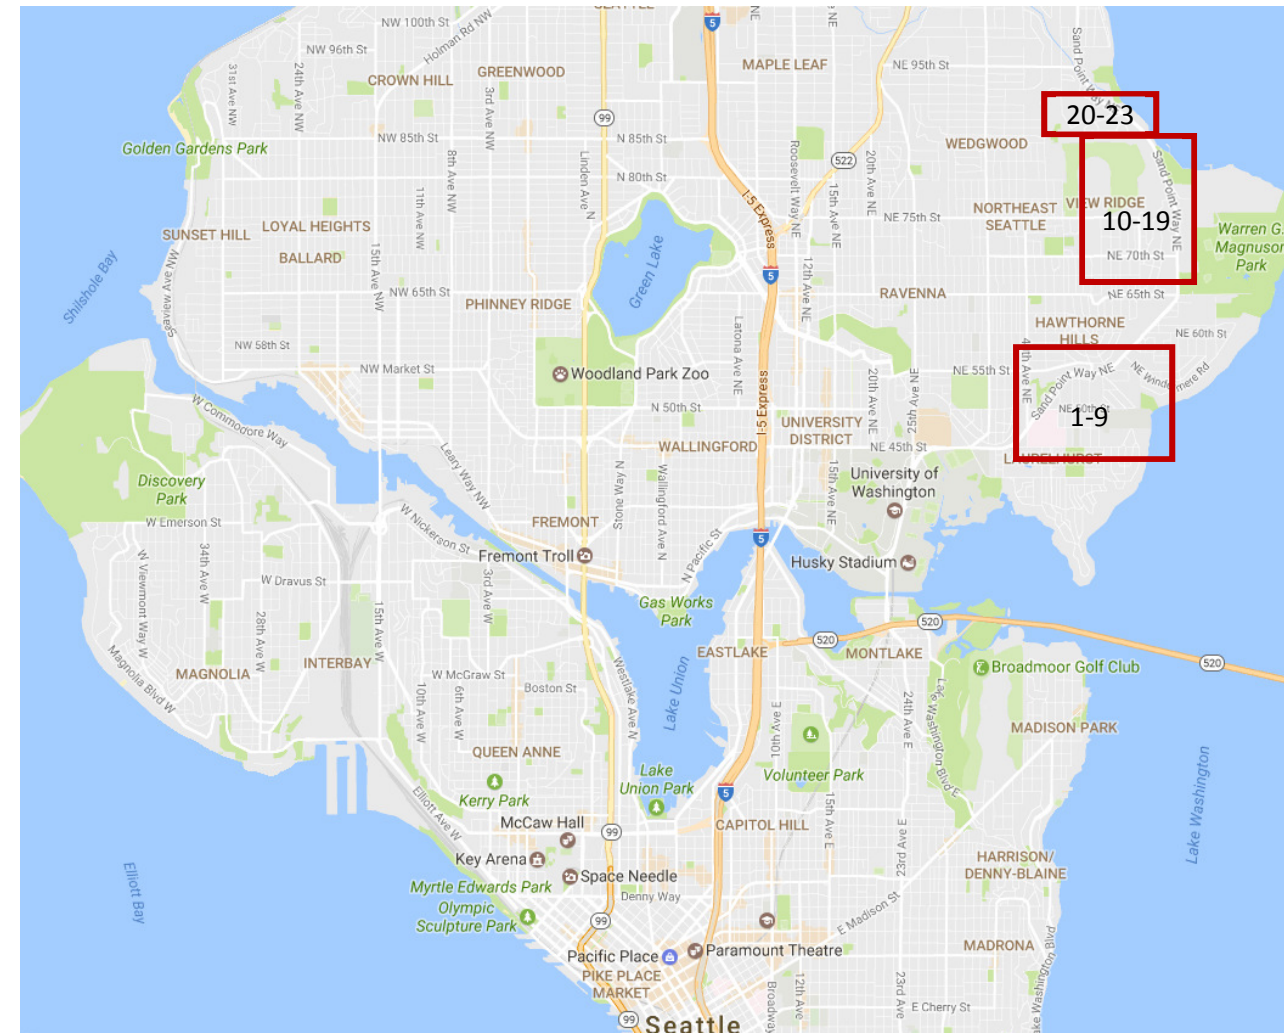

TRAIL SEGMENTS

| SITE # | SEGEMENT | LENGTH | WIDTH | |
|--------------|-----------------------------------|--------------|-------|--------------------------------|
| 13 | South of NE 77th St | 90' | 10' | |
| 14 | Bollards South of NE 77th St | 5' | 10' | Not in Contract Work by Others |
| 15 | Bollards North of NE 77th St | 5' | 10' | Not in Contract Work by Others |
| 16 | Bollards South of Fairway Estates | 20' | 11.5' | Not in Contract Work by Others |
| 17 | Bollards North of Fairway Estates | 7' | 10' | Not in Contract Work by Others |
| 18 | North of Fairway Estates | 95' | 10' | |
| 19 | North of Fairway Estates | 48' | 10' | |
| 20 | East of NE 85th St | 68' | 10' | Additive #1 |
| 21 | East of 54th Ave NE | 55' | 10' | Additive #1 |
| 22 | 185' South of Inverness Dr NE | 38' | 10' | Additive #1 |
| 23 | South of Inverness Dr NE | 15' | 10' | Not in Contract Work by Others |
| TOTAL | | 1082' | | |


>>>>CAUTION – CALL 811 <<<<
**UTILITY NOTIFICATION CENTER
 BEFORE YOU DIG!**
WWW.CALLBEFOREYOUDIG.ORG

NOT LESS THAN 2 OR MORE THAN 10 BUSINESS DAYS PRIOR TO COMMENCING EXCAVATION OR DEMOLITION, SECURE THE SERVICES OF A COMMERCIAL UNDERGROUND UTILITIES LOCATOR SERVICE TO IDENTIFYBELOW-GROUND IMPROVEMENTS THAT MAY NOT BE INDICATED ON THE DRAWINGS. ADDITIONALLY, TO REQUEST ON-SITE UNDERGROUND UTILITY SYSTEMS LOCATES, CALL **SPR INSPECTION REQUEST LINE @ (206) 684-7034**. REFER TO SECTIONS 02100 & 02120 OF THE SPECIFICATIONS FOR INSTRUCTIONS ON HOW TO PROCEED.

**2017 BURKE GILMAN TRAIL
 REPAVING PROJECT**

SEATTLE PARKS AND RECREATION
 SEATTLE, WASHINGTON
 Ordinance Numbers: 125207 and 124927
 Specification Number: 1975
 PW # 2017-070
 WC # 1749



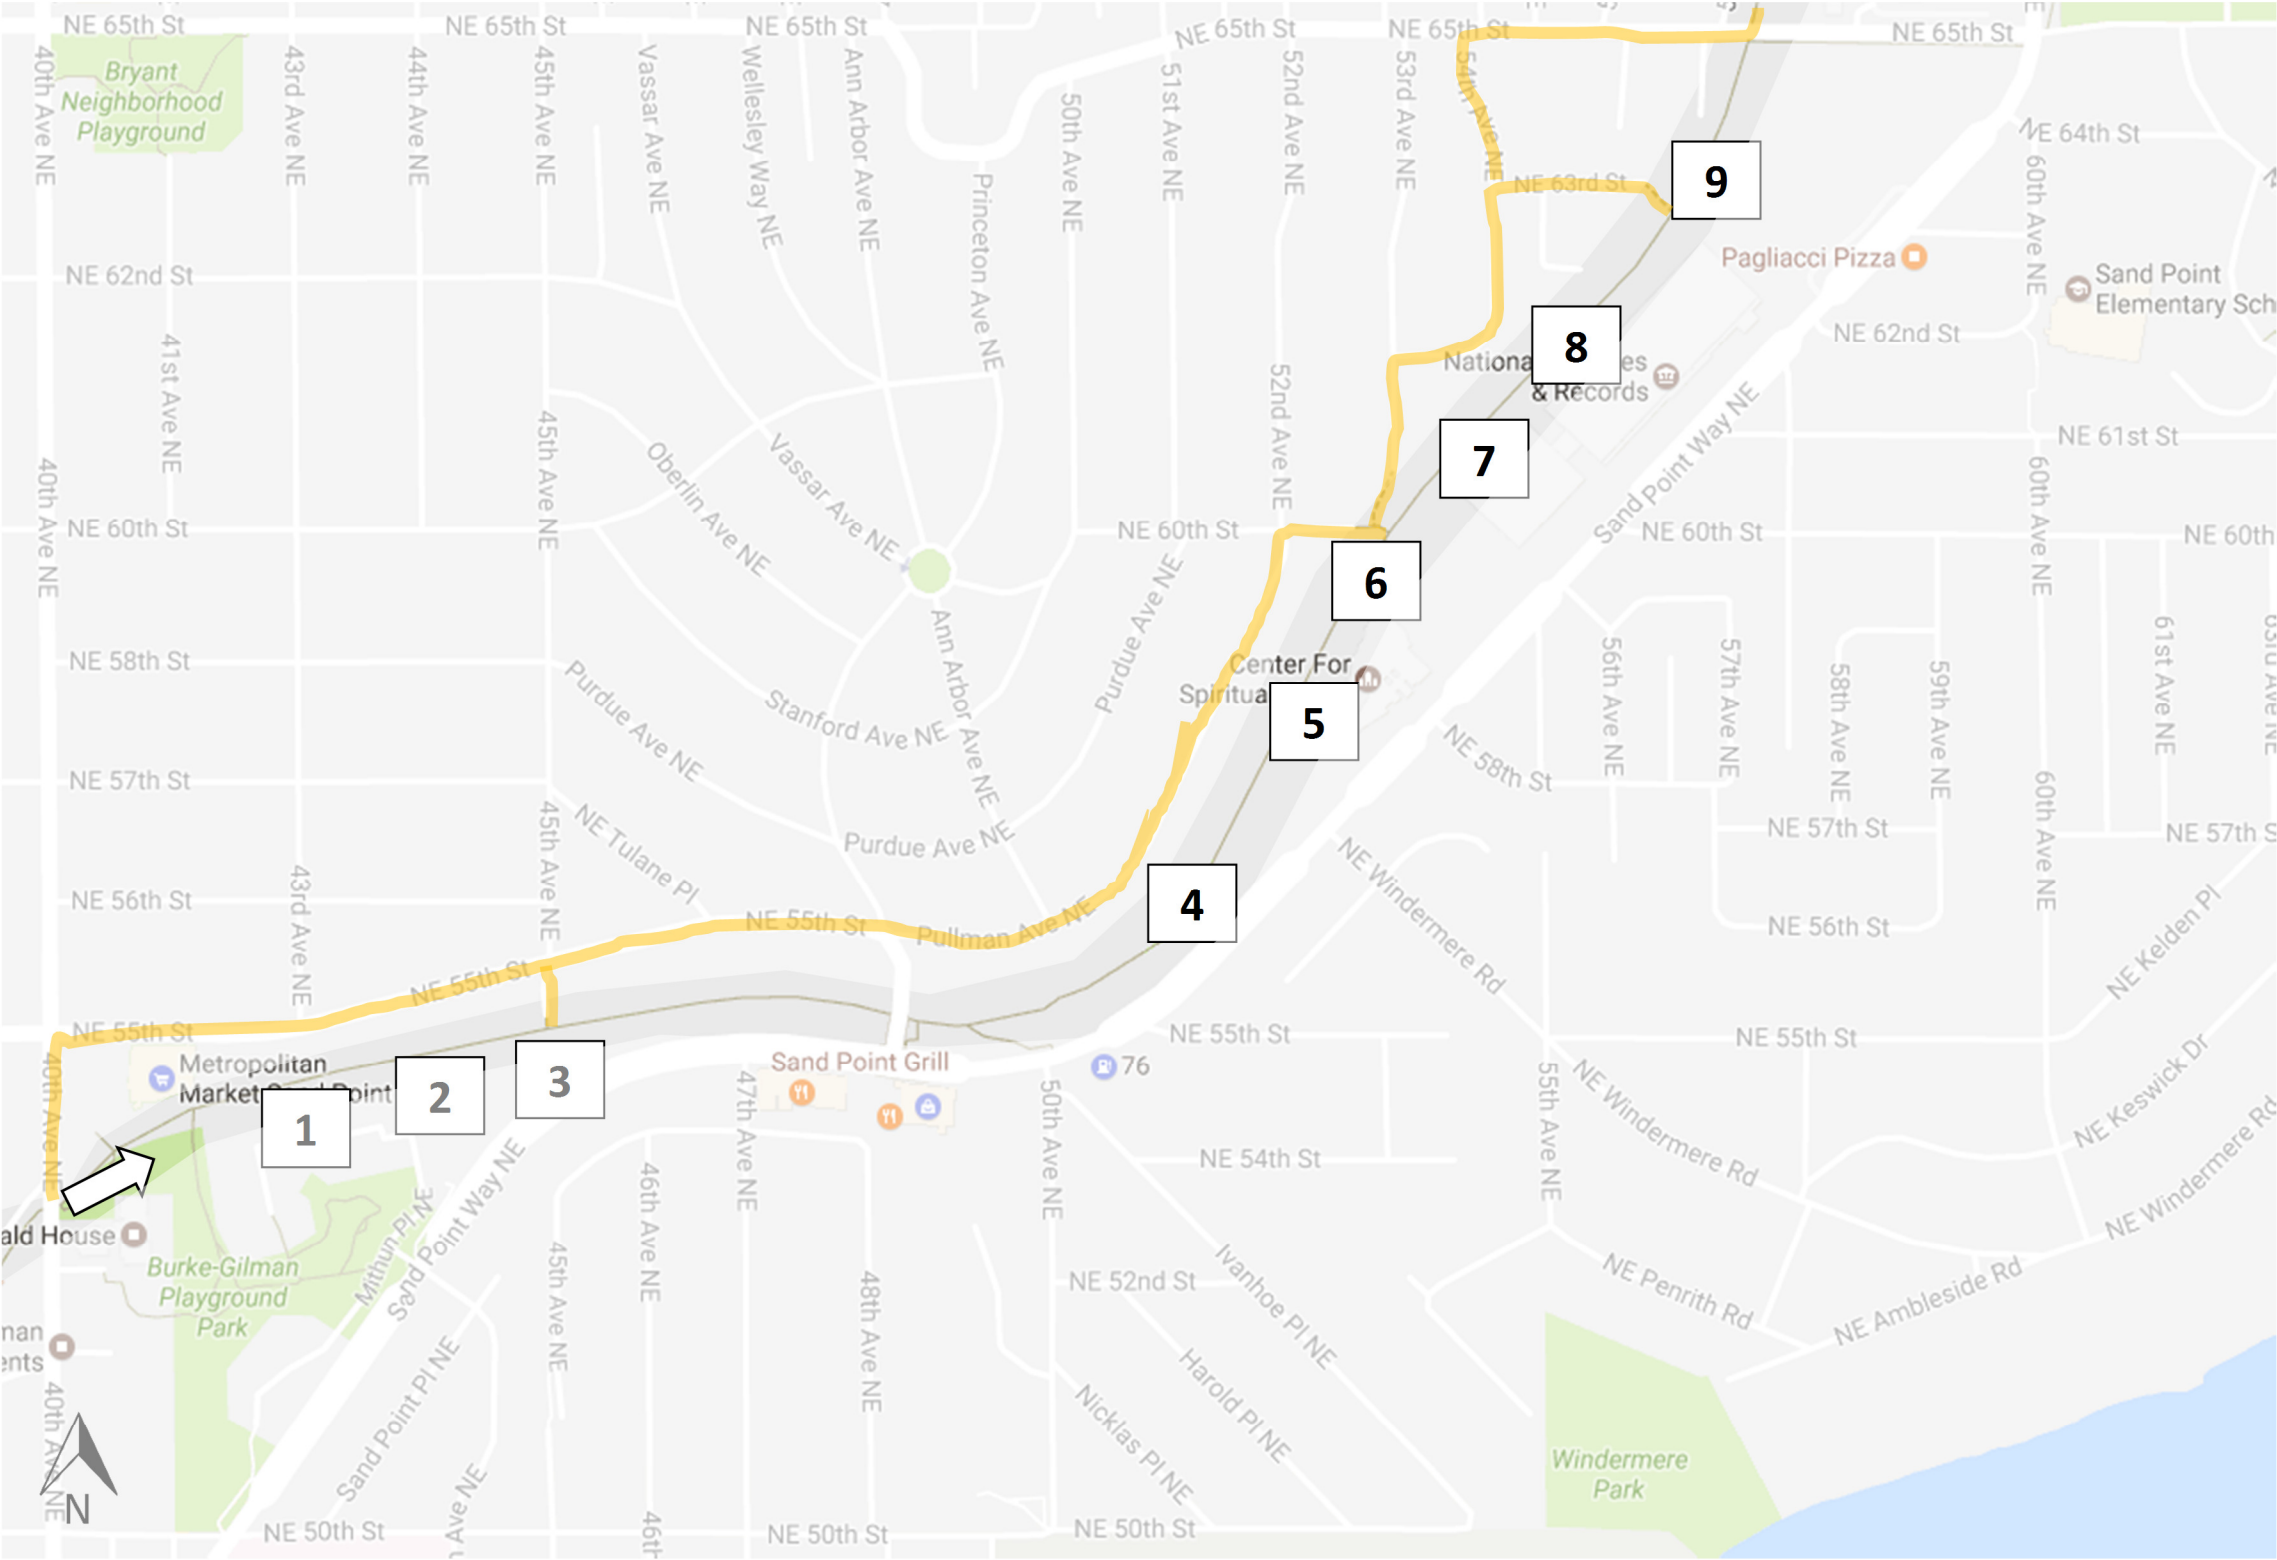

Detour Routes

