


CONSTRUCTION GUIDELINE

TYPICAL 26 KV SWITCH TERMINATION ASSEMBLY

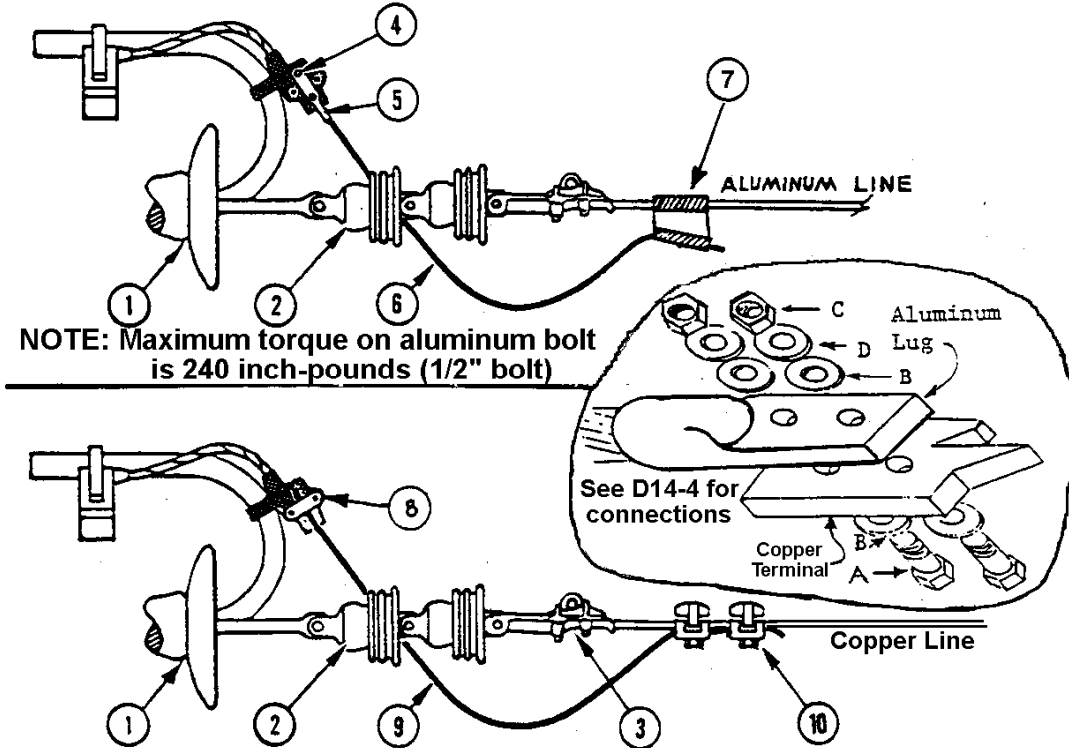

BILL OF MATERIAL

| ITEM | QUANTITY | DESCRIPTION | STOCK NO. |
|------|----------|--|--|
| 1 | 1 | SWITCH, KPF or S&C | As Specified |
| 2 | 12 | INSULATOR, 6" suspension | 690208 |
| 3 | 6 | CLAMP, DE Strain | Copper #4 581332E #2 581333 1/0 to 300 693901 Aluminum 3/0 to 477 694292 795 to 954 694294 |
| 4 | 12 | (A) BOLT, 1/2"-13 x 2-1/2", (B) WASHER, Al., (C) NUT, Al., (D) WASHER, Belleville Spring | 782051 |
| 5 | 6 | TERMINAL, Compression, Cable to copper pad 4/0 to 500 650267 TERMINAL, Compression, Cable to 4 hole pad 4/0 to 500 651224 | |
| 6 | 35 ft. | WIRE, All Aluminum 397.5 AAC 600113 954 AAC 600126 | |
| 7 | 6 | CONNECTOR, Tap, Ampact | See D14-1 |
| 8 | 6 | TERMINAL, Bolted, Copper | Supplied with switch |
| 9 | 35 ft. | WIRE, Copper, Jumper #2 610434 2/0 610425 4/0 610414 | |
| 10 | 12 | CONNECTOR, Tap, 2-bolt, parallel | 669379E thru 669384 |

ORIGINATOR

Jim S. Horn

STANDARDS COORDINATOR

Charles L. Shaffer

STANDARDS SUPERVISOR

John C. Skinner

UNIT DIRECTOR

Betty Robm