


Decatur School perimeter streets -

40th Avenue NE, NE 80th Street, 43rd Avenue NE, NE 77th Street



Decatur School perimeter streets - 40th Avenue NE, NE 80th Street, 43rd Avenue NE, NE 77th Street

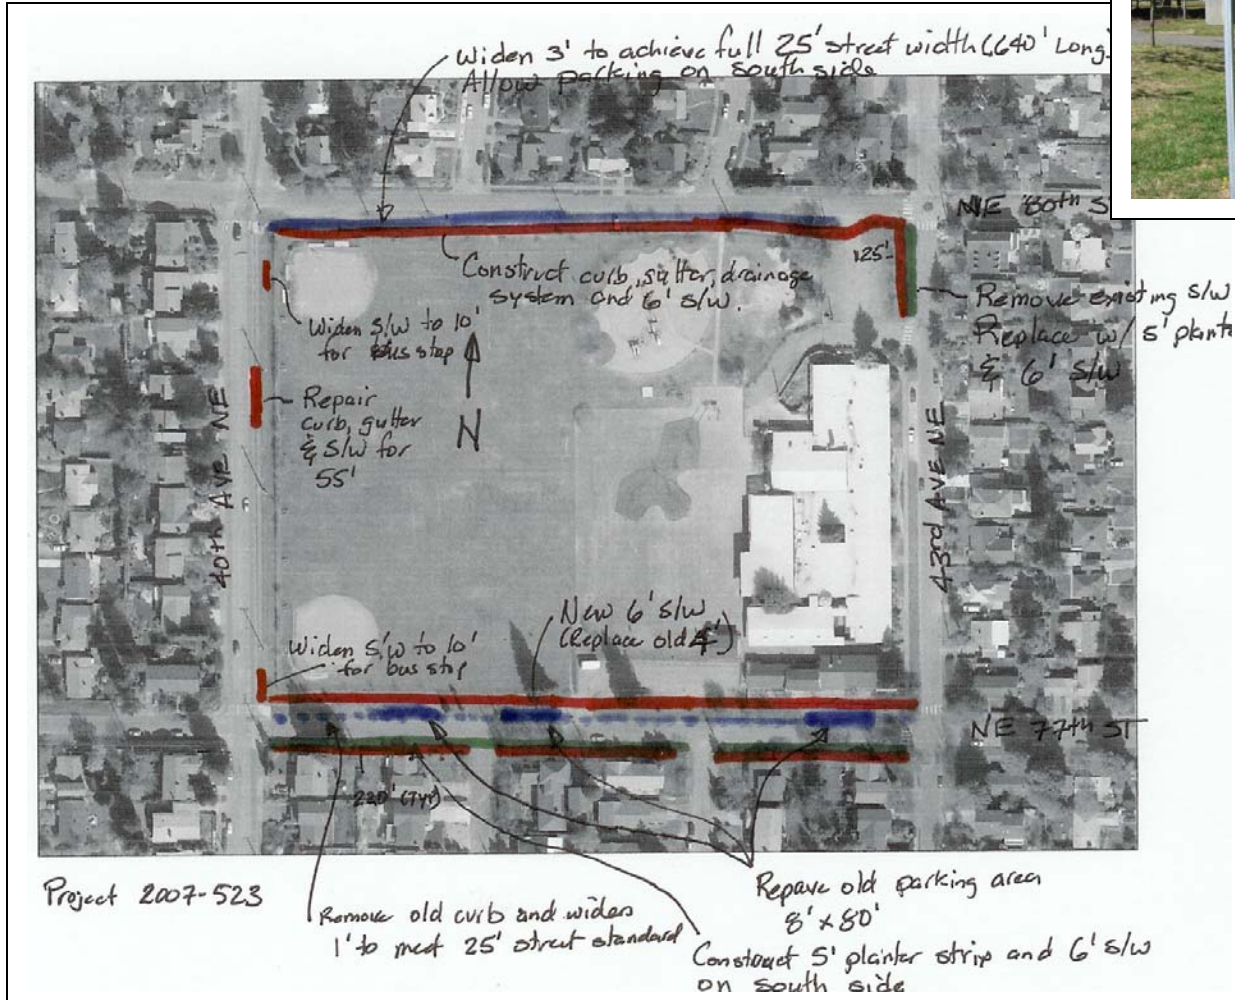

Project ID # 2007-523

Type of Improvement: Sidewalk
Neighborhood: Wedgewood

Approximate Length: 2770 feet
Street Classification: Local Street

Applicant Description of Problem and/or Project:

Problem: None given.

Suggested Project: 1. 40th Ave NE-repair sidewalks, improve and or consolidate 2 bus stops, add ADA ramps @ 40th NE & NE 80th. 2. NE 80th St-build new sidewalks and parking cutouts along entire south side of street adjacent to Decatur. 3. 43rd Ave NE-repair and improve sidewalks and ADA ramps. 4. NE 77th St-on north side, widen sidewalks and renovate parking cutouts. On south side, construct complete sidewalks from 40th NE to 43rd NE, widen paved street for improved safety.

Potential Solution and/or Comments:

40th Ave NE – NE 77th St to NE 80th St.

- Reconstruct about 55-feet of curb, gutter and sidewalk that is in poor condition on the east side of the street.
- Construct new bus pads at 2 bus stops on the east side of the street.
- Reconstruct curb ramps to current ADA standards.

NE 80th St – 40th Ave NE to 43rd Ave NE.

- Widen street by about 3-feet on the south side to meet the City's standard street width of 25 feet. Allow parking on the south side of the street.
- Construct about 750 feet of new curb, gutter and 6-foot sidewalk on the south side of the street.
- Construct new catch basins and storm sewer to collect street runoff.
- Reconstruct curb ramps to current ADA standards.

43rd Ave NE – NE 77th St to NE 80th St.

- Reconstruct about 125-feet of sidewalk at the north end of the block as a new 6-foot sidewalk separated from the existing curb by a 5-foot planting strip.
- Reconstruct curb ramps to current ADA standards.

NE 77th St – 40th Ave NE to 43rd Ave NE.

- Replace existing 4-foot sidewalk that is in poor condition on the north side of the street with a new 6-foot sidewalk.
- Reconstruct 3 existing parking areas on the north side of the street (each about 8-foot by 80-feet)
- Widen street by about 1-foot on the north side of the street to meet the City's standard street width of 25 feet. Construct about 750 feet of new curb and gutter.
- Construct 5-foot planting strip and 6-foot sidewalk on the south side of the street behind the existing curb and gutter
- Reconstruct curb ramps to current ADA standards.

Challenges/Tradeoffs:

- There are some existing private improvements within the right-of-way on the south side of NE 77th Street (such as landscaping and fences) that may require removal.

Preliminary Range of Cost: \$ 940,000 to \$ 1,160,000