


# NE 127th - 30th Ave NE to 28th Ave NE



## NE 127th - 30th Ave NE to 28th Ave NE

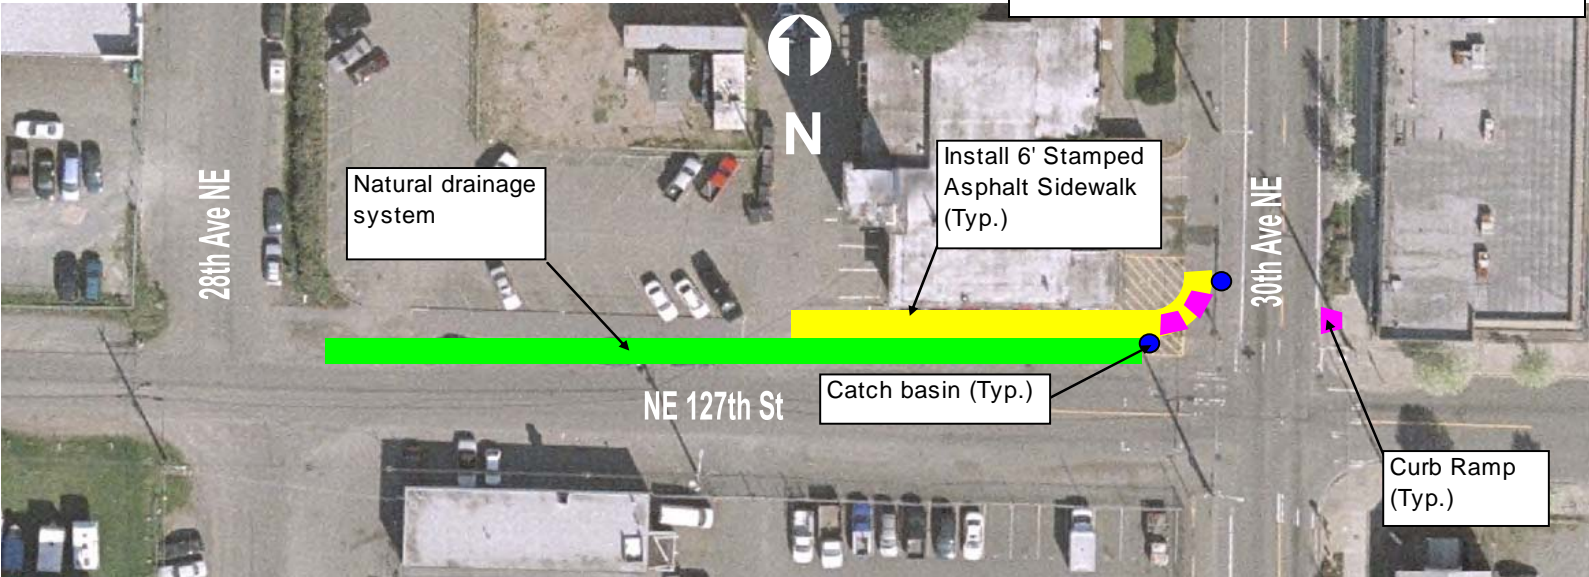

**Project ID # 2007-032**

**Type of Improvement:** Sidewalk  
**Neighborhood:** Olympic Hills

**Approximate Length:** 350 feet  
**Street Classification:** Local Street

### **Applicant Description of Problem and/or Project:**

**Problem:** None given

**Suggested Project:** Continue the stamped asphalt sidewalk from the Farmer's Market and a new fire station with new sidewalk. Work with SPU to fix drainage problems on this street similar to drainage system on NE 117th in Pinehurst.

### **Potential Solution and/or Comments:**

NE 127<sup>th</sup> from 30<sup>th</sup> Ave NE to 28<sup>th</sup> Ave NE

- Construct new catch basins and a natural drainage system to collect street runoff from 28<sup>th</sup> Ave NE to 30<sup>th</sup> Ave NE.
- Construct 6-foot stamped asphalt sidewalk from 30<sup>th</sup> Ave NE west to connect into existing stamped asphalt sidewalk.
- Construct concrete curb ramp to current ADA standards at the intersection of NE 127<sup>th</sup> St. and 28<sup>th</sup> Ave NE.

### **Challenges/Tradeoffs:**

- Parking may be prohibited on the north side of the roadway due to natural drainage system construction.
- Curbs not feasible due to lack of drainage infrastructure.

**Preliminary Range of Cost:** \$ 340,000 to \$ 420,000