



City of Seattle

Department of Construction & Inspections
Nathan Torgelson, Director



DESIGN GUIDANCE STREAMLINED DESIGN REVIEW


Project Number: 3023044
Address: 10 Etruria Street
Applicant: Lathrop Douglas
Date of Report: Wednesday, March 23, 2016
DPD Staff Present: Katy Haima

SITE & VICINITY

Site Zone: Lowrise (LR3)

Nearby Zones: (North) LR3
(South) LR3
(East) LR3
(West) LR3

Lot Area: 3,600 SF

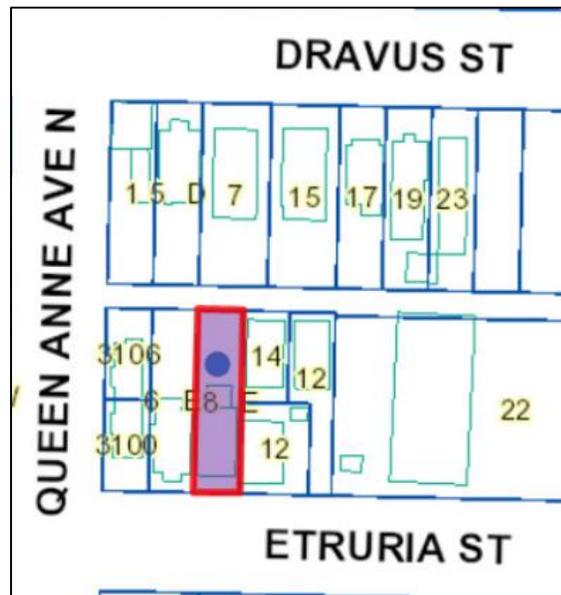

Current Development:

The site is currently developed with a two-story, two-unit residential structure, built in 1909.

Surrounding Development and Neighborhood Character:

The site is located in North Queen Anne. Development in the immediate vicinity of the site consists largely of multifamily structures. The housing stock transitions to single-family residences to the south. Seattle University is two blocks to the west. Nickerson Street, a principal arterial, is two blocks to the east.

Access:

Vehicular access is via the alley that abuts the street to the north.

Environmentally Critical Areas:

A portion of the site is mapped as ECA Potential Slide.

PROJECT DESCRIPTION

The project proposal is for a new two-story residential structure containing two units, to be located to the north of the existing structure, near the alley. The existing structure is to remain.

PUBLIC COMMENT

One public comment was received, regarding the record of ownership of the property.

PRIORITIES & BOARD RECOMMENDATIONS

After visiting the site, considering the analysis of the site and context provided by the proponents, and hearing public comment, the Design Review Planner provided the following siting and design guidance. The Planner identified the Citywide Design Guidelines & Neighborhood specific guidelines (as applicable) of highest priority for this project.

- 1. Response to Context.** The proposed design relates well to the established scale, residential character and architectural style prevalent in the neighborhood. The use of secondary features, such as balconies, traditional materials, and pitched roof complement existing architectural context. Locating the new structure behind the existing appears appropriate for the site and context, as it does not add visible height or bulk as viewed from the street, which retains the established character of the streetscape. (CS2-A, CS2-D, CS3-A, DC2-B, DC2-C, DC2-D)

2. **Parking & Service Uses.** Strive to further reduce the visual impact of the parking and integrate the design of the columns into the overall massing expression. Consider the functionality of the proposed layout and access pathways. (CS1-C, CS2-D, DC1-C, DC2-A, DC2-C)
 - a. Revise the design of the columns to relate to the established architectural style and expression. As proposed, the mass of the structure at the alley is lacking a strong base expression. The columns should read as part of the overall structure, and appear as an integrated structural component to ground the mass to grade.
 - b. Include screening from parking where possible.
 - c. It is unclear how trash will be brought out to alley with the current configuration. Where possible, arrange the site elements to provide clear pathways from the trash to the alley, and to the pathway at the west side of the site.

3. **Open Space & Entries.** Design the entry sequences to be welcoming and easily identifiable, and the open spaces to fit the needs of the users. (PL2-B, PL2-D, PL3-A, PL3-B, DC3-A, DC3-B)
 - a. Incorporate signage for the back units into the design of the pathway at the streetscape for effective wayfinding.
 - b. The design of open space and landscaping should minimize privacy impacts to adjacencies and among the units. Where pathways are located adjacent to structures, use landscaping to buffer windows.

DESIGN REVIEW GUIDELINES

The priority Citywide and Neighborhood guidelines are summarized below. For the full text please visit the [Design Review website](#).

CONTEXT & SITE

CS1 Natural Systems and Site Features: Use natural systems/features of the site and its surroundings as a starting point for project design.

CS1-C Topography

CS1-C-1. Land Form: Use natural topography and desirable landforms to inform project design.

CS1-C-2. Elevation Changes: Use the existing site topography when locating structures and open spaces on the site.

CS2 Urban Pattern and Form: Strengthen the most desirable forms, characteristics, and patterns of the streets, block faces, and open spaces in the surrounding area.

CS2-A Location in the City and Neighborhood

CS2-A-1. Sense of Place: Emphasize attributes that give a distinctive sense of place. Design the building and open spaces to enhance areas where a strong identity already exists, and create a sense of place where the physical context is less established.

CS2-A-2. Architectural Presence: Evaluate the degree of visibility or architectural presence that is appropriate or desired given the context, and design accordingly.

CS2-D Height, Bulk, and Scale

CS2-D-1. Existing Development and Zoning: Review the height, bulk, and scale of neighboring buildings as well as the scale of development anticipated by zoning for the area to determine an appropriate complement and/or transition.

CS2-D-2. Existing Site Features: Use changes in topography, site shape, and vegetation or structures to help make a successful fit with adjacent properties.

CS2-D-3. Zone Transitions: For projects located at the edge of different zones, provide an appropriate transition or complement to the adjacent zone(s). Projects should create a step in perceived height, bulk and scale between the anticipated development potential of the adjacent zone and the proposed development.

CS2-D-4. Massing Choices: Strive for a successful transition between zones where a project abuts a less intense zone.

CS2-D-5. Respect for Adjacent Sites: Respect adjacent properties with design and site planning to minimize disrupting the privacy of residents in adjacent buildings.

CS3 Architectural Context and Character: Contribute to the architectural character of the neighborhood.

CS3-A Emphasizing Positive Neighborhood Attributes

CS3-A-1. Fitting Old and New Together: Create compatibility between new projects, and existing architectural context, including historic and modern designs, through building articulation, scale and proportion, roof forms, detailing, fenestration, and/or the use of complementary materials.

CS3-A-2. Contemporary Design: Explore how contemporary designs can contribute to the development of attractive new forms and architectural styles; as expressed through use of new materials or other means.

CS3-A-3. Established Neighborhoods: In existing neighborhoods with a well-defined architectural character, site and design new structures to complement or be compatible with the architectural style and siting patterns of neighborhood buildings.

CS3-A-4. Evolving Neighborhoods: In neighborhoods where architectural character is evolving or otherwise in transition, explore ways for new development to establish a positive and desirable context for others to build upon in the future.

PUBLIC LIFE

PL2 Walkability: Create a safe and comfortable walking environment that is easy to navigate and well-connected to existing pedestrian walkways and features.

PL2-B Safety and Security

PL2-B-1. Eyes on the Street: Create a safe environment by providing lines of sight and encouraging natural surveillance.

PL2-B-2. Lighting for Safety: Provide lighting at sufficient lumen intensities and scales, including pathway illumination, pedestrian and entry lighting, and/or security lights.

PL2-B-3. Street-Level Transparency: Ensure transparency of street-level uses (for uses such as nonresidential uses or residential lobbies), where appropriate, by keeping views open into spaces behind walls or plantings, at corners, or along narrow passageways.

PL2-D Wayfinding

PL2-D-1. Design as Wayfinding: Use design features as a means of wayfinding wherever possible.

PL3 Street-Level Interaction: Encourage human interaction and activity at the street-level with clear connections to building entries and edges.

PL3-A Entries

PL3-A-1. Design Objectives: Design primary entries to be obvious, identifiable, and distinctive with clear lines of sight and lobbies visually connected to the street.

PL3-A-2. Common Entries: Multi-story residential buildings need to provide privacy and security for residents but also be welcoming and identifiable to visitors.

PL3-A-3. Individual Entries: Ground-related housing should be scaled and detailed appropriately to provide for a more intimate type of entry.

PL3-A-4. Ensemble of Elements: Design the entry as a collection of coordinated elements including the door(s), overhead features, ground surface, landscaping, lighting, and other features.

PL3-B Residential Edges

PL3-B-1. Security and Privacy: Provide security and privacy for residential buildings through the use of a buffer or semi-private space between the development and the street or neighboring buildings.

PL3-B-2. Ground-level Residential: Privacy and security issues are particularly important in buildings with ground-level housing, both at entries and where windows are located overlooking the street.

PL3-B-3. Buildings with Live/Work Uses: Maintain active and transparent facades in the design of live/work residences. Design the first floor so it can be adapted to other commercial use as needed in the future.

PL3-B-4. Interaction: Provide opportunities for interaction among residents and neighbors.

DESIGN CONCEPT

DC1 Project Uses and Activities: Optimize the arrangement of uses and activities on site.

DC1-C Parking and Service Uses

DC1-C-1. Below-Grade Parking: Locate parking below grade wherever possible. Where a surface parking lot is the only alternative, locate the parking in rear or side yards, or on lower or less visible portions of the site.

DC1-C-2. Visual Impacts: Reduce the visual impacts of parking lots, parking structures, entrances, and related signs and equipment as much as possible.

DC1-C-3. Multiple Uses: Design parking areas to serve multiple uses such as children's play space, outdoor gathering areas, sports courts, woonerf, or common space in multifamily projects.

DC1-C-4. Service Uses: Locate and design service entries, loading docks, and trash receptacles away from pedestrian areas or to a less visible portion of the site to reduce possible impacts of these facilities on building aesthetics and pedestrian circulation.

DC2 Architectural Concept: Develop an architectural concept that will result in a unified and functional design that fits well on the site and within its surroundings.

DC2-A Massing

DC2-A-1. Site Characteristics and Uses: Arrange the mass of the building taking into consideration the characteristics of the site and the proposed uses of the building and its open space.

DC2-A-2. Reducing Perceived Mass: Use secondary architectural elements to reduce the perceived mass of larger projects.

DC2-B Architectural and Facade Composition

DC2-B-1. Façade Composition: Design all building facades—including alleys and visible roofs— considering the composition and architectural expression of the building as a whole. Ensure that all facades are attractive and well-proportioned.

DC2-B-2. Blank Walls: Avoid large blank walls along visible façades wherever possible. Where expanses of blank walls, retaining walls, or garage facades are unavoidable, include uses or design treatments at the street level that have human scale and are designed for pedestrians.

DC2-C Secondary Architectural Features

DC2-C-1. Visual Depth and Interest: Add depth to facades where appropriate by incorporating balconies, canopies, awnings, decks, or other secondary elements into the façade design. Add detailing at the street level in order to create interest for the pedestrian and encourage active street life and window shopping (in retail areas).

DC2-C-2. Dual Purpose Elements: Consider architectural features that can be dual purpose— adding depth, texture, and scale as well as serving other project functions.

DC2-C-3. Fit With Neighboring Buildings: Use design elements to achieve a successful fit between a building and its neighbors.

DC2-D Scale and Texture

DC2-D-1. Human Scale: Incorporate architectural features, elements, and details that are of human scale into the building facades, entries, retaining walls, courtyards, and exterior spaces in a manner that is consistent with the overall architectural concept

DC2-D-2. Texture: Design the character of the building, as expressed in the form, scale, and materials, to strive for a fine-grained scale, or “texture,” particularly at the street level and other areas where pedestrians predominate.

DC3 Open Space Concept: Integrate open space design with the building design so that they complement each other.

DC3-A Building-Open Space Relationship

DC3-A-1. Interior/Exterior Fit: Develop an open space concept in conjunction with the architectural concept to ensure that interior and exterior spaces relate well to each other and support the functions of the development.

DC3-B Open Space Uses and Activities

DC3-B-1. Meeting User Needs: Plan the size, uses, activities, and features of each open space to meet the needs of expected users, ensuring each space has a purpose and function.

DC3-B-2. Matching Uses to Conditions: Respond to changing environmental conditions such as seasonal and daily light and weather shifts through open space design and/or programming of open space activities.

DC3-B-3. Connections to Other Open Space: Site and design project-related open spaces to connect with, or enhance, the uses and activities of other nearby public open space where appropriate.

DC3-B-4. Multifamily Open Space: Design common and private open spaces in multifamily projects for use by all residents to encourage physical activity and social interaction.

DEVELOPMENT STANDARD ADJUSTMENTS

Design Review Staff's recommendation on the requested adjustment(s) will be based upon the adjustment's potential to help the project better meet these design guideline priorities and achieve a better overall design than could be achieved without the adjustment(s).

At the time of Design Guidance, the following adjustments were requested:

- 1. Rear Setback (SMC 23.45.518.A):** The Code requires a minimum rear setback of 10 feet. The applicant proposes to reduce the setback to 5 feet.

DPD staff indicated support for the departure. Pushing the mass of the new structure 5 feet to the rear allows for a more spacious amenity space between the existing structure (to be retained) and the proposed structure. Consolidating the amenity space in this location provides a central open space that acts as an entry court for the back unit, and a more generous space to allow for greater usability by the residents. In addition, the larger separation between the units improves privacy for each, and allows for greater access to light and air for each unit. In the building plans, include a window study that demonstrates how the location of the windows was designed to provide privacy from the adjacent uses. (CS2-D, DC2-A, DC3-A, DC3-B)

STAFF DIRECTION

At the conclusion of the Design Guidance, the DPD Staff recommended the project should move forward to building permit application in response to the Design Guidance provided.

1. Please be aware that this report is an assessment on how the project is meeting the intent of the Design Guidelines. This review does not include a full zoning review. Zoning review will

occur when the MUP plans and/or building permit is submitted. If needed and where applicable, SDR adjustments may be requested in response to zoning corrections.

2. If applicable, please prepare your Master Use Permit for SEPA review with a thorough zoning analysis listing the 23.45 and SMC 23.54 code section criteria, showing both required and proposed information (include page number where you graphically show compliance). You may want to review Tip 201 (<http://web1.seattle.gov/dpd/cams/CamList.aspx>) and may also want to review the MUP information here:
<http://www.seattle.gov/dpd/permits/permittypes/mupoverview/default.htm>
3. Along with your building permit application, please include a narrative response to the guidance provided in this report.
4. All requested adjustments must be clearly documented in the building permit plans.