









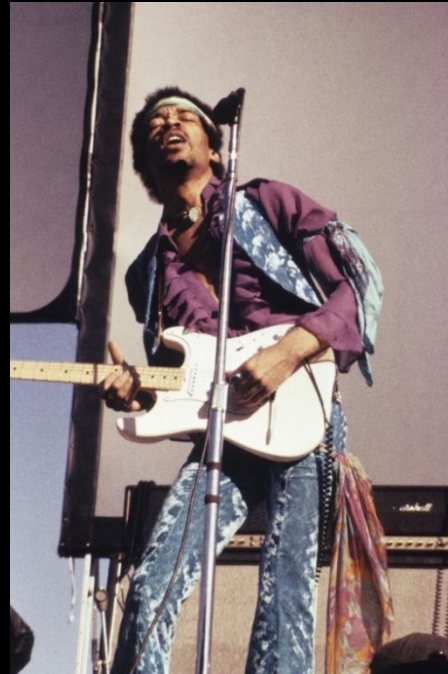

LOCAL CONTEXT MAP

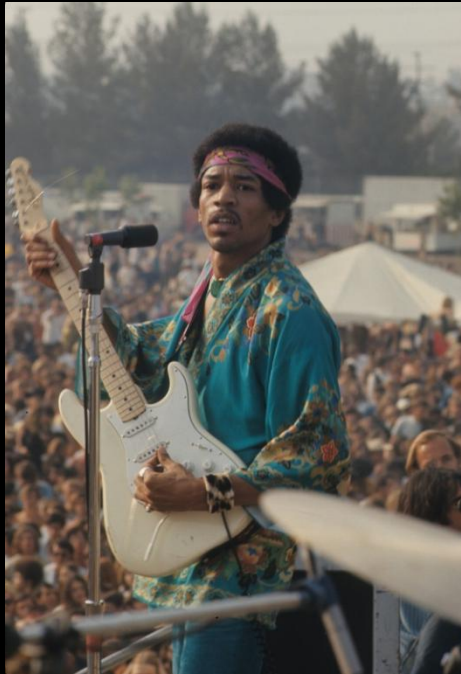

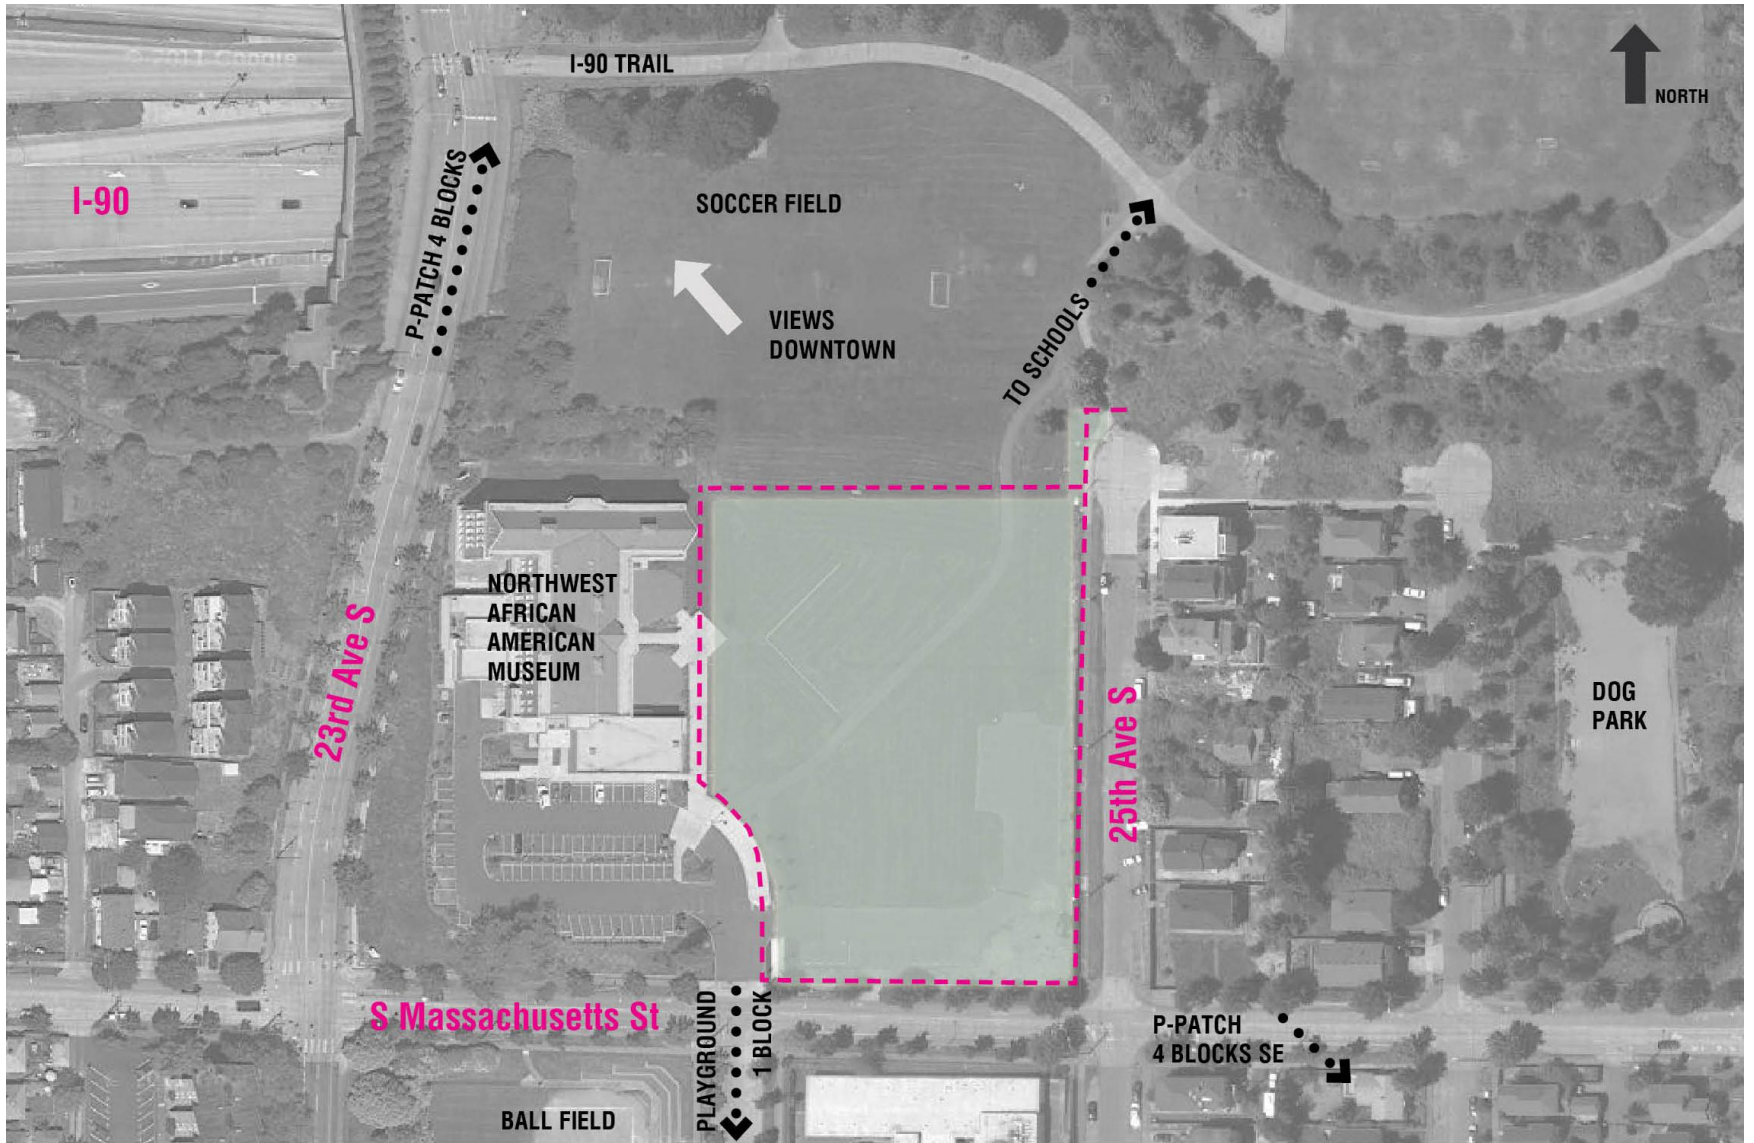

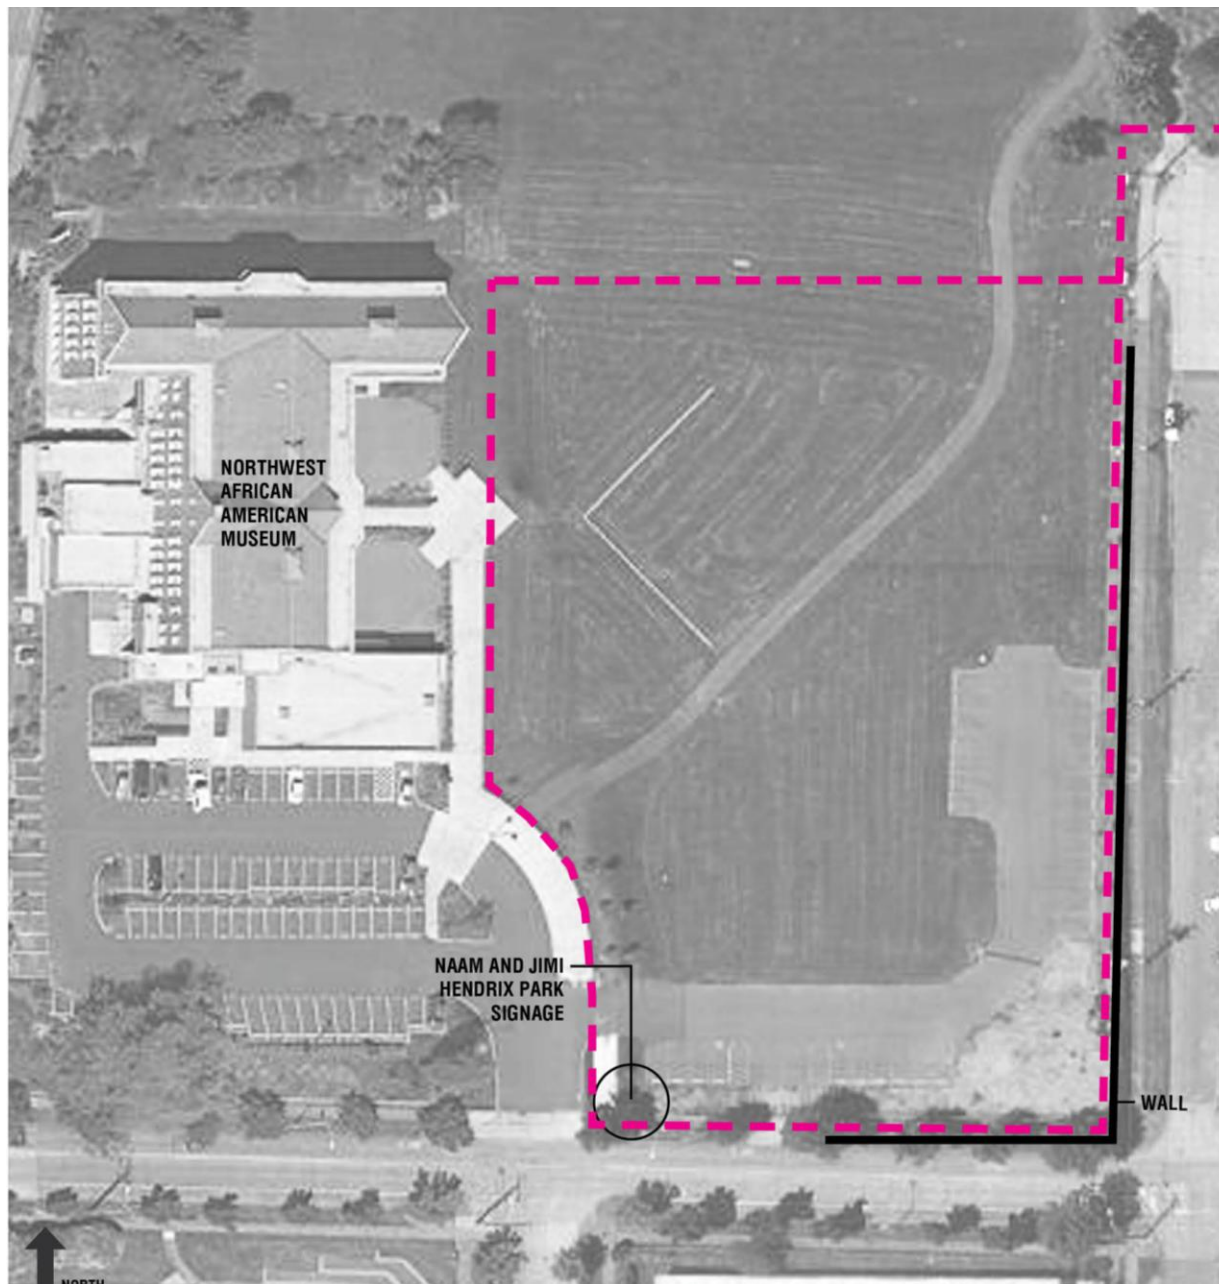



VIEW OF PARK FROM SOUTH (EXISTING PARKING LOT)



VIEW OF PARK FROM SOUTHEAST (MT. BAKER NEIGHBORHOOD)



NORTHWEST AFRICAN AMERICAN MUSEUM ENTRANCE





VIEW TO SOUTHEAST FROM NAAM ROOF



RETAINING WALL INHIBITS ACCESS FROM SOUTHEAST



PATH LOOKING NORTHEAST TO I-90 TRAIL



PATH LOOKING SOUTHWEST



VIEW TO MOUNT RAINIER



LITTLE WING OPTION



SPIRAL FLOWER OPTION




GUITAR OPTION




JIMI HENDRIX PARK




JIMI HENDRIX PARK

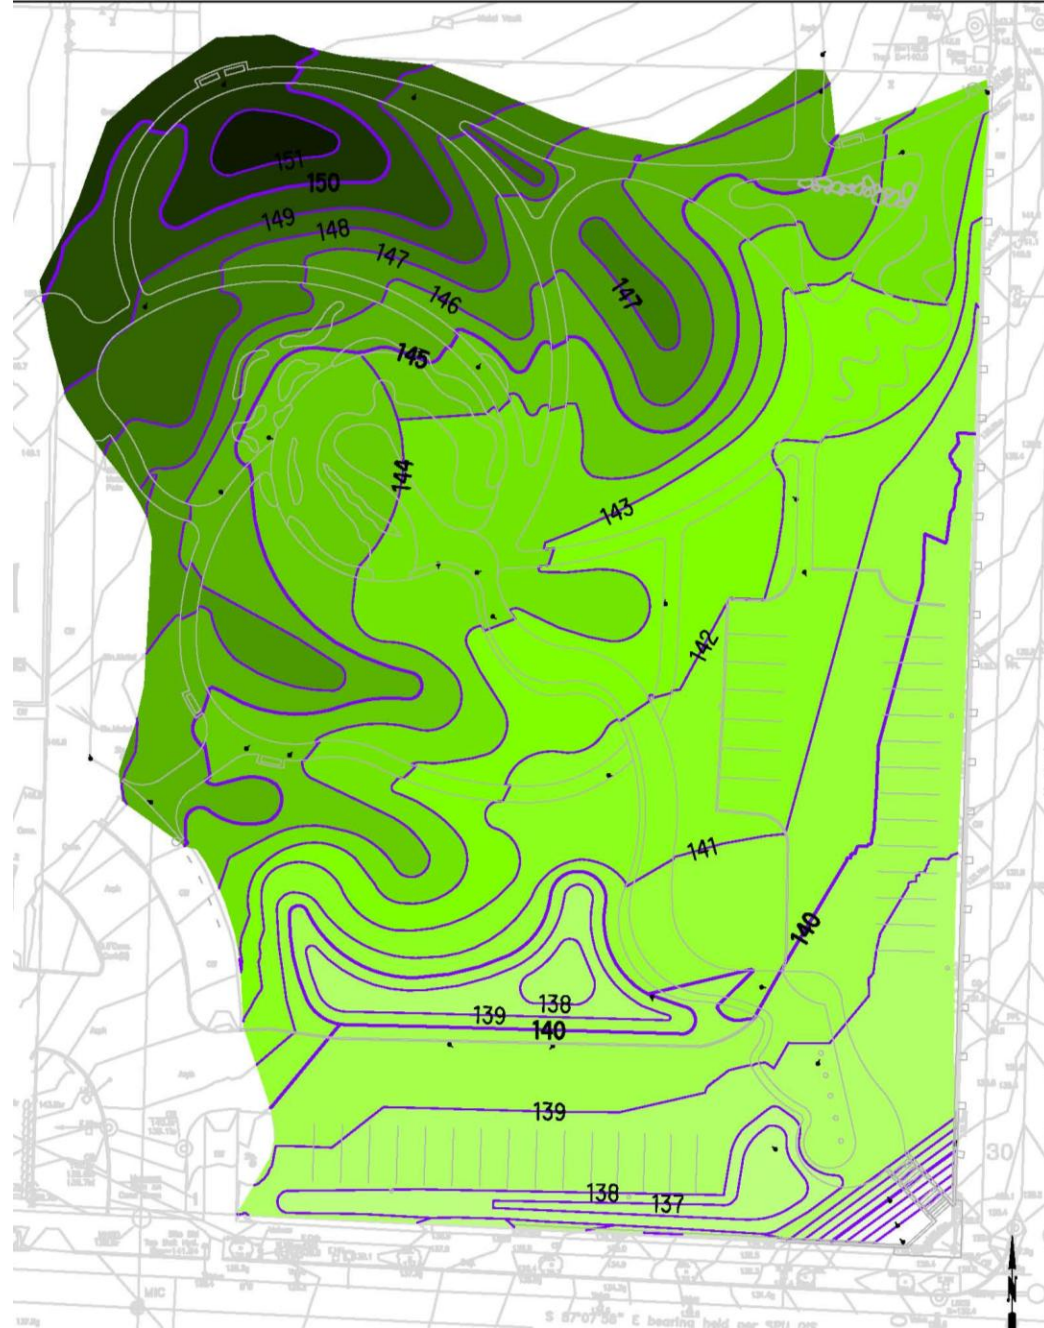

GRADING PLAN

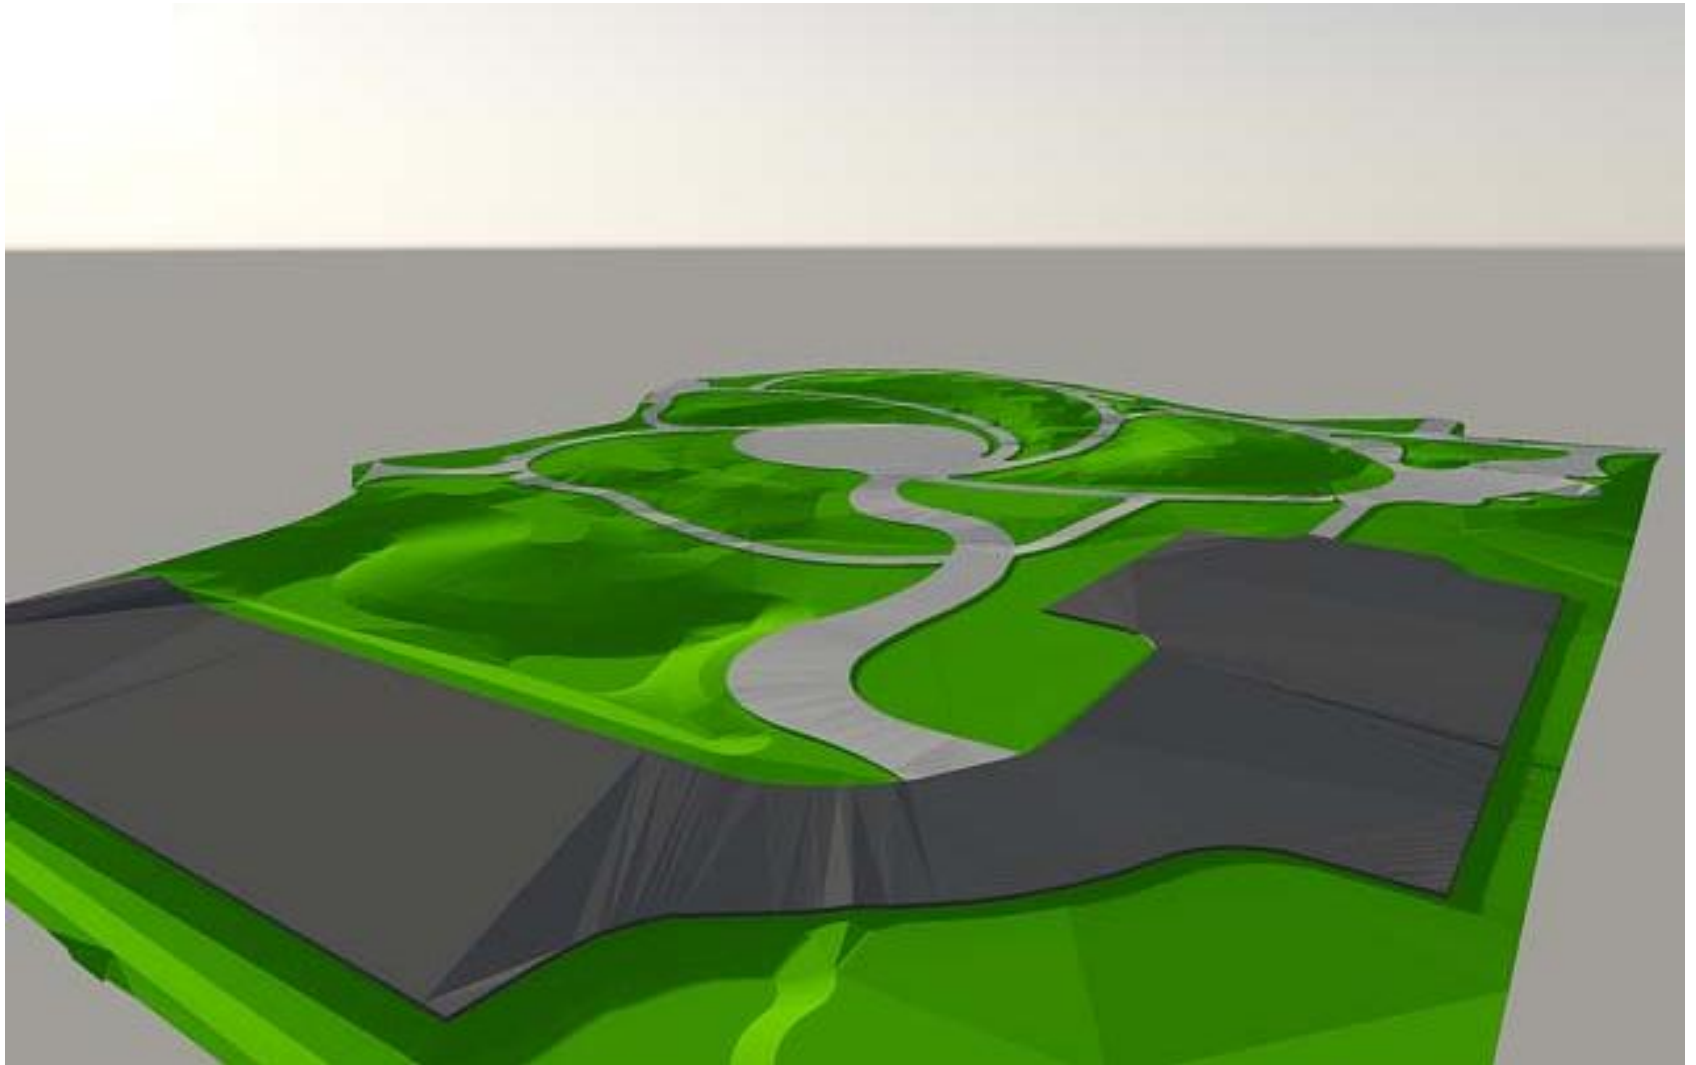

VIEW FROM SOUTHEAST CORNER

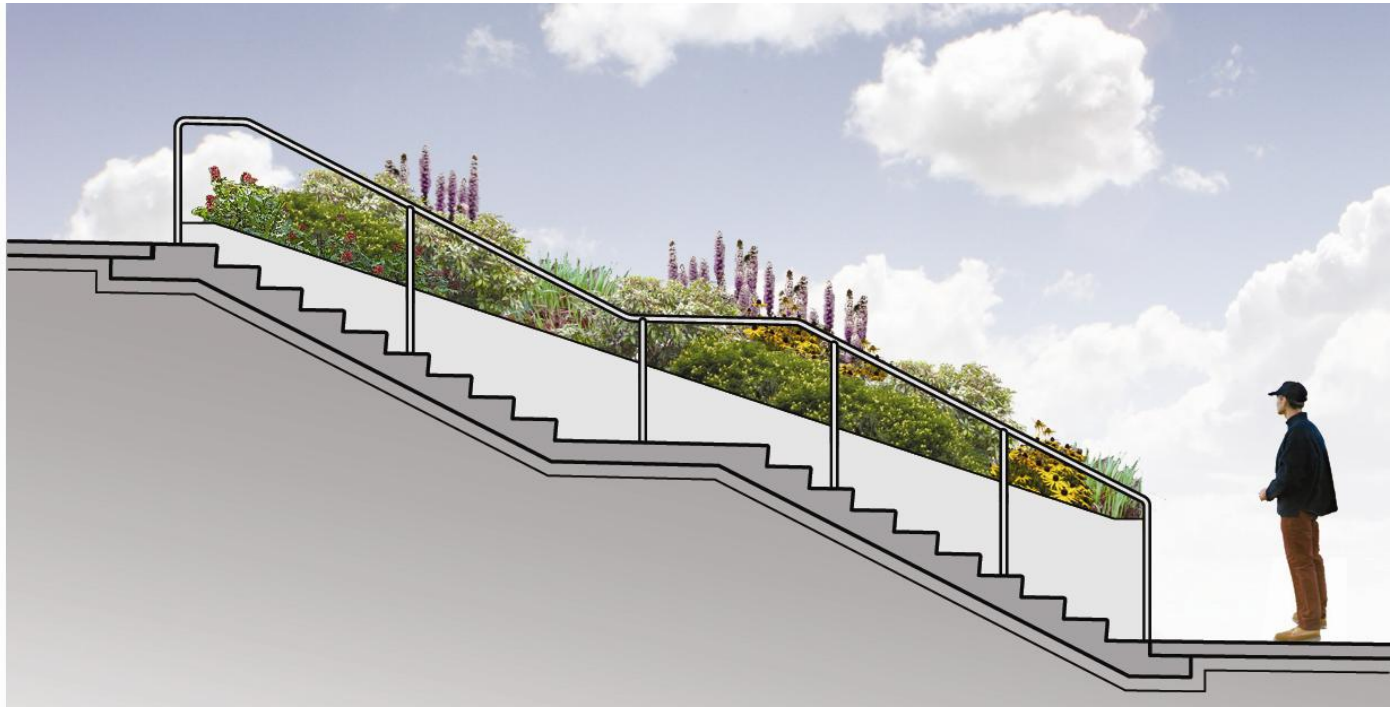

THE GUITAR



Scirpus microcarpus -
Small Fruited Bullrush



Carex obnupta - Slough Sedge



Juncus effusus - Scouring Rush



Cornus s. 'Kelseyii' - Dwarf Red Twigged Dogwood



Douglas Spirea - Spiraea douglasii



Siberian Iris - Iris siberica




Purple Coneflower - Echinacea purpurea




Camassia quamash - Camas

STORMWATER GARDEN

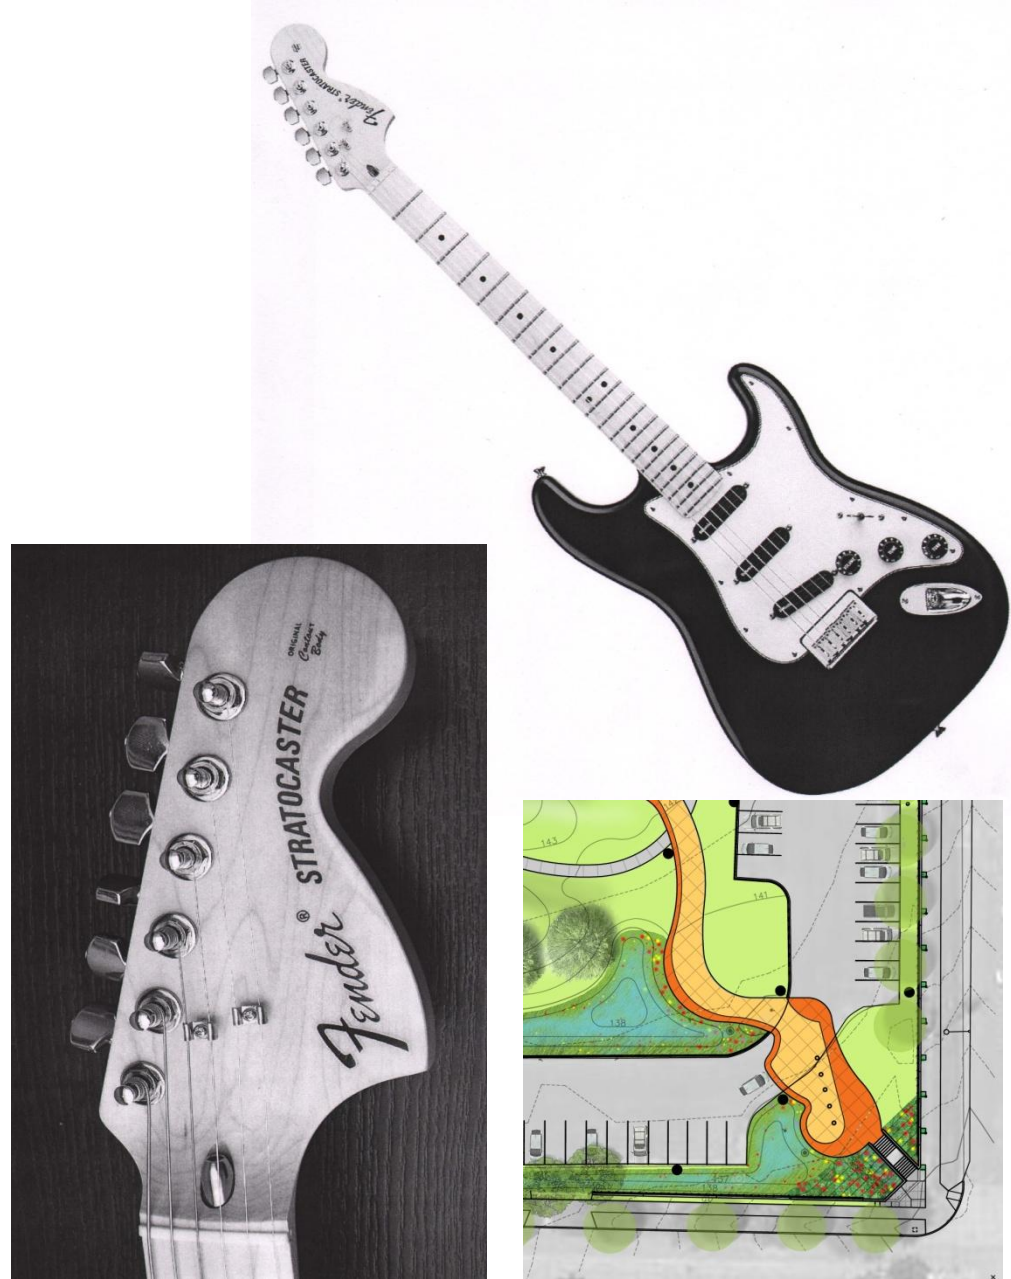



THE GUITAR



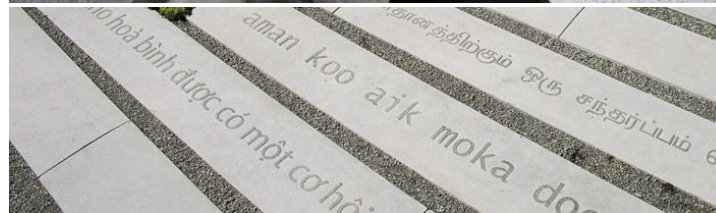

TEXT IMBEDDED IN STEM OF GUITAR TIMELINE PATH

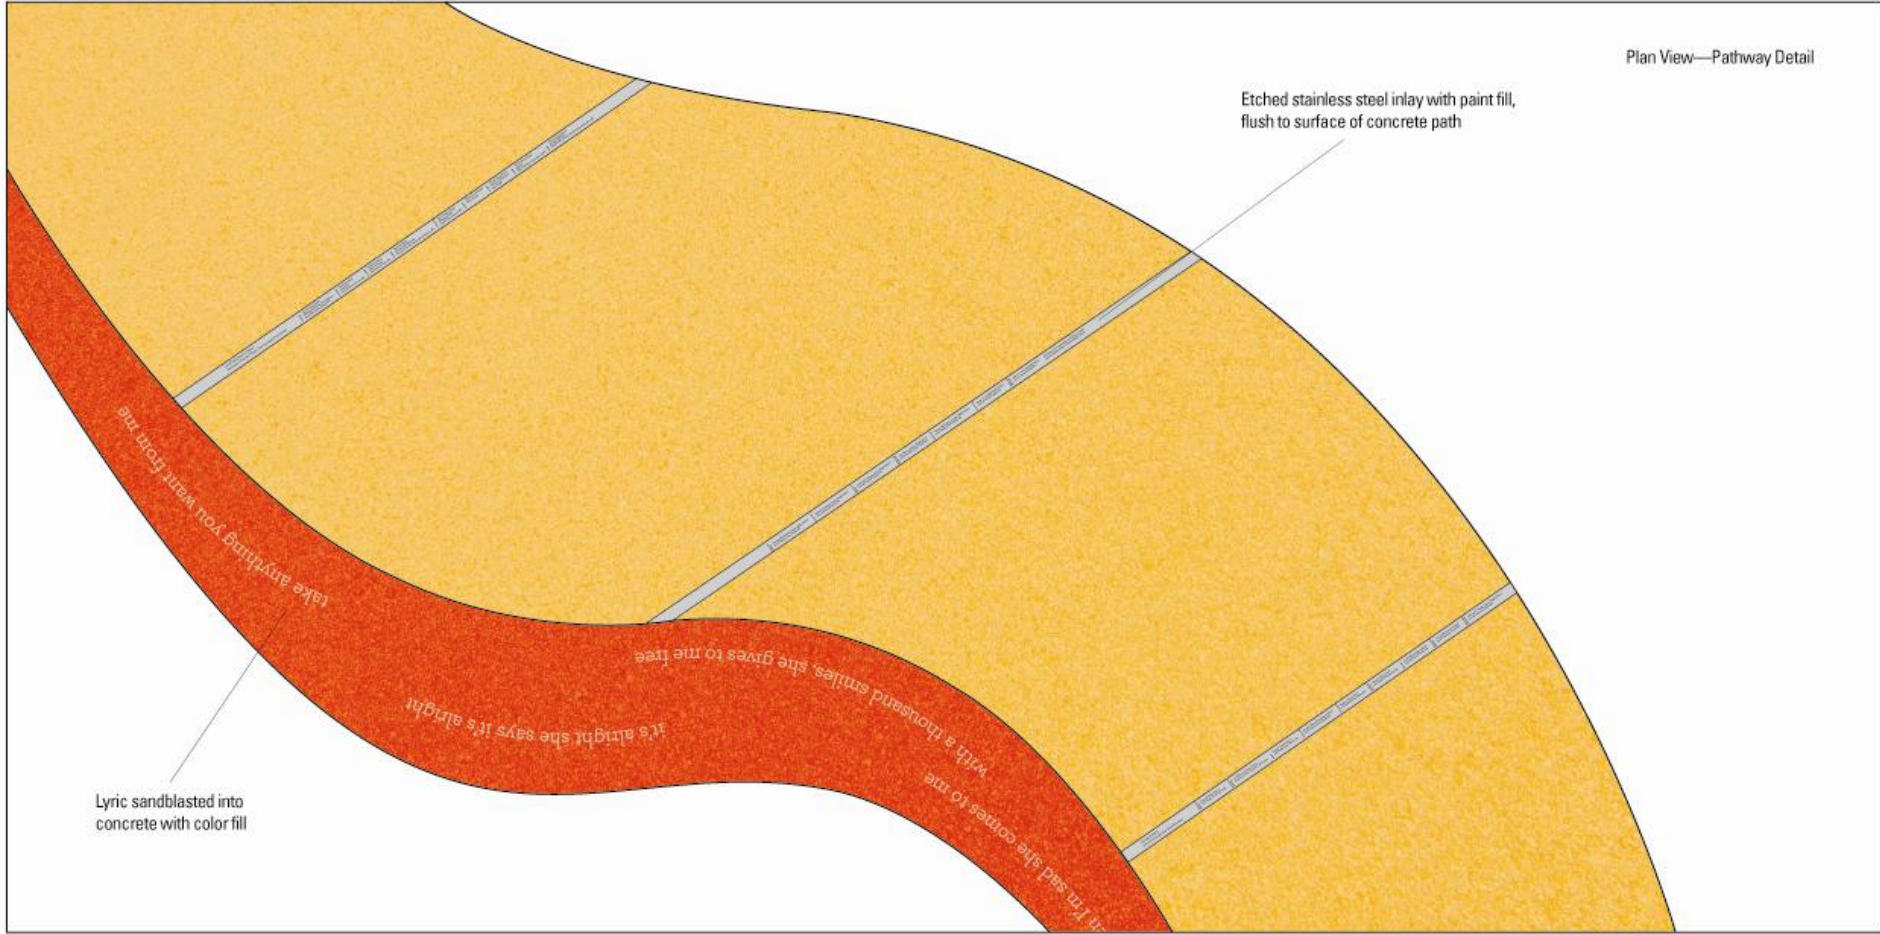

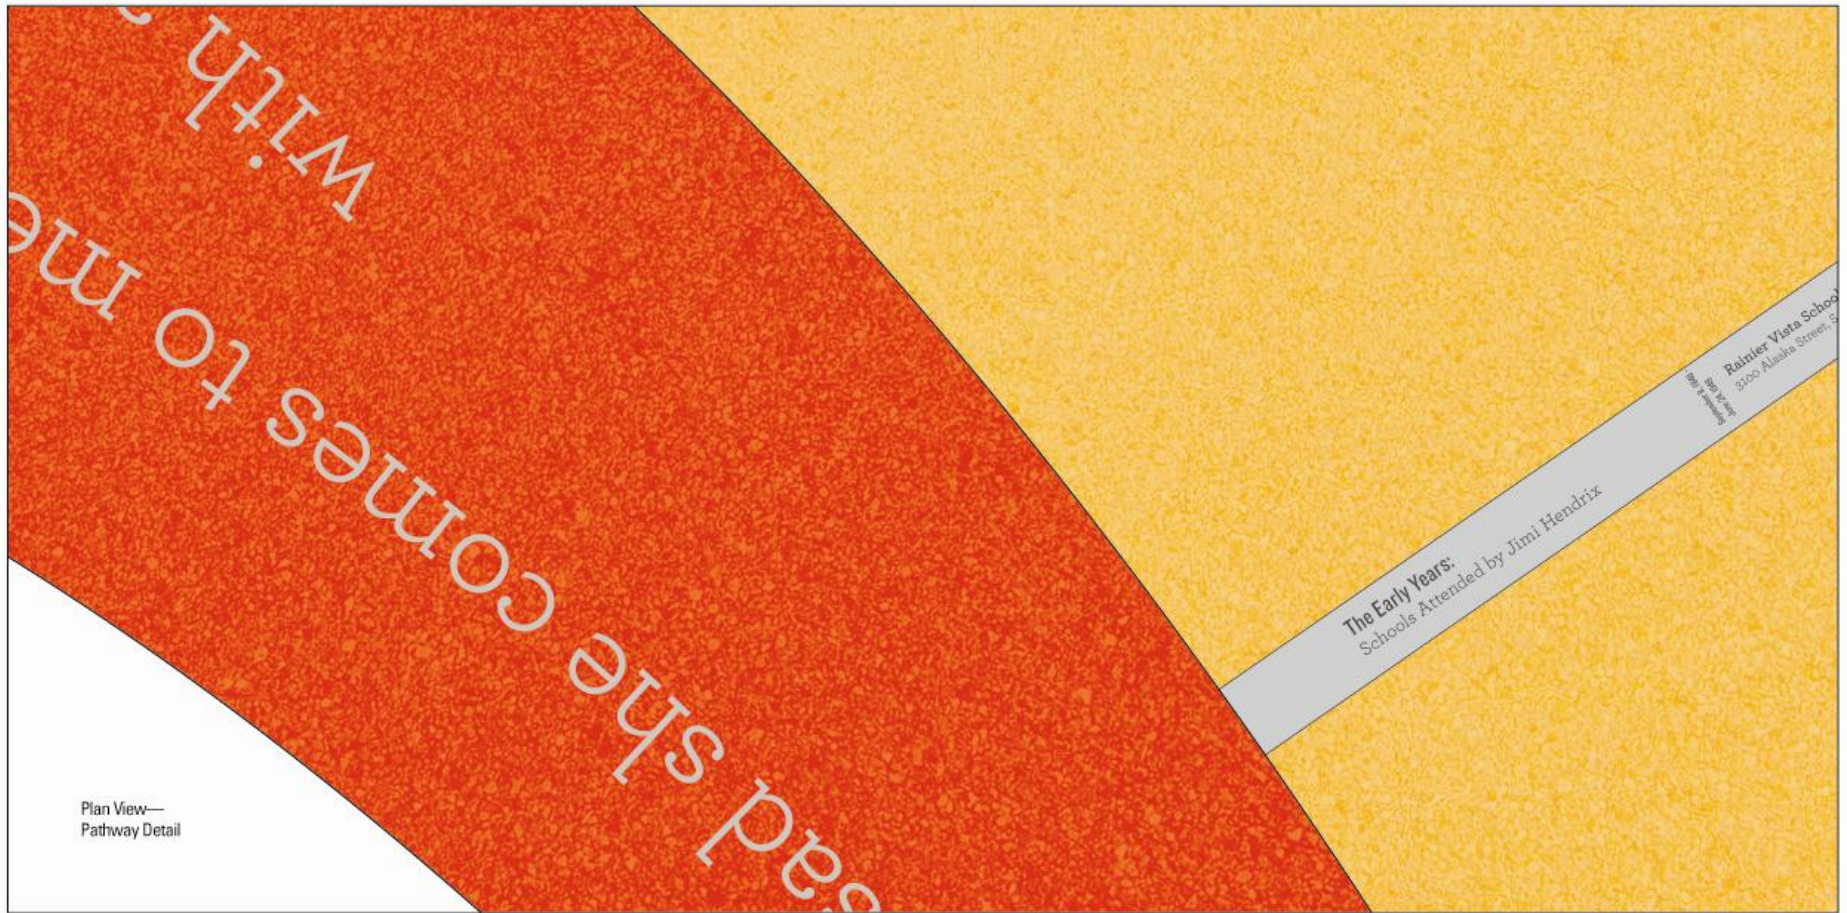

Etched Stainless Steel Inlays

11' 4 1/2"

4"

The Early Years— Schools Attended by Jimi Hendrix

September 1, 1966 March 17, 1968 Rainier Vista School 1100 Alaska Street, Seattle, WA	September 1, 1966 March 17, 1968 Sir Wilson Dawson Annex 910 Burnard Street, Vancouver, BC, Canada	September 1, 1966 March 17, 1968 Rainier Vista School 2300 Alaska Street, Seattle, WA	September 1, 1966 March 17, 1968 Horace Mann Elementary School 3400 E Cherry Street, Seattle, WA	September 1, 1966 March 17, 1968 Rainier Vista School 2000 Alaska Street, Seattle, WA	September 1, 1966 March 17, 1968 Rainier Vista School 2300 Alaska Street, Seattle, WA	September 1, 1966 March 17, 1968 Leschi Elementary School 125 200th Avenue, Seattle, WA	September 1, 1966 March 17, 1968 Leschi Elementary School 125 200th Avenue, Seattle, WA	September 1, 1966 March 17, 1968 Edmond S. Meany Junior High School 201 106th Avenue E, Seattle, WA
--	---	--	---	--	--	--	--	--

Timeline Items: 16
Approximate Bars Needed: 2
Average Cap Height: 1/2"

Local Performance Dates— Northwest Venues Where Jimi Hendrix Performed

September 1, 1966 March 17, 1968 The Rocking Kings Washington National Guard Armory 3400 39th Avenue S, Renton, WA	September 1, 1966 March 17, 1968 Unknown Band Frick Hall 175 39th Street, Seattle, WA	September 1, 1966 March 17, 1968 Unknown Band Unknown Venue 120th Avenue, Seattle, WA	September 1, 1966 March 17, 1968 Various Bands Spanish Castle Ballroom Riviera / First Des Moines Road, Midway, WA	September 1, 1966 March 17, 1968 The Rocking Kings Washington Hall 152 14th Street, Seattle, WA	September 1, 1966 March 17, 1968 The Rocking Kings Twinkl Terrace Bellevue, WA	September 1, 1966 March 17, 1968 The Rocking Kings "All State Tournament" Bellevue, WA	September 1, 1966 March 17, 1968 The Rocking Kings Bellevue 1200 E Madison Street, Seattle, WA	September 1, 1966 March 17, 1968 The Rocking Kings Cottage Lake Park 1841 NE Woodlawn Drive, Duvall, WA
--	---	---	--	---	--	--	--	---

Timeline Items: 22
Approximate Bars Needed: 2
Average Cap Height: 1/2"

Recording Studio Dates— Studios Jimi Hendrix Recorded In

September 1, 1966 March 17, 1968 Sunday Sound Studio 2007 Duaneau Road, Nashville, TN	September 1, 1966 March 17, 1968 Atlantic Studios New York, NY with Tony Brothers	September 1, 1966 March 17, 1968 Unknown Studio New York, NY with Don Coway	September 1, 1966 March 17, 1968 Star Recording Studio 908 Midwestern Avenue, Memphis, TN with Steve Cropper	September 1, 1966 March 17, 1968 Gold Star Studios 6022 Santa Monica Blvd, Hollywood, CA with Russ Lee Brooks	September 1, 1966 March 17, 1968 Studio 76, Inc. 3020 Broadway, New York, NY with Curtis Knight & The Squires	September 1, 1966 March 17, 1968 Abrams Studios New York, NY with Lonnie Youngblood	September 1, 1966 March 17, 1968 De Lane Lea Music, Ltd. 129 Kingsway, Camden, London, England first Jimi Hendrix Experience recording session	September 1, 1966 March 17, 1968 Regent Sound Studio (Studio K) 106-109 Tottenham Court Road, Camden, London
--	---	---	--	---	---	---	--	---

Timeline Items: 23
Approximate Bars Needed: 3
Average Cap Height: 1/2"

World-Wide Concert Dates— Venues Jimi Hendrix Played Around the World

September 1, 1966 March 17, 1968 Spanish Castle Ballroom Riviera / First Des Moines Road, Midway, WA	September 1, 1966 March 17, 1968 The Apollo Theater 253 West 125th Street, New York, NY	September 1, 1966 March 17, 1968 The Club Cheetah 57 Broadway, New York, NY	September 1, 1966 March 17, 1968 Cafe Wha? 100 MacDougal Street, New York, NY	September 1, 1966 March 17, 1968 Scotch of St. James 21 Mason's Yard, London, SW1	September 1, 1966 March 17, 1968 Novelty Cinema Evreux, France	September 1, 1966 March 17, 1968 L'Olympia Paris, France	September 1, 1966 March 17, 1968 Big Apple Club Munich, Germany	September 1, 1966 March 17, 1968 "Ready Steady Go!" BBC (Rediffusion Studios) Kingsway, City of Westminster, London, England
---	--	--	--	--	---	---	--	---


Timeline Items: 41
Approximate Bars Needed: 4
Average Cap Height: 1/2"


Jimi Hendrix Park
2280 JHP Timeline Path

Scale 1.5" = 1'
Plan View 4 of 4


Concept Drawing
06/18/13

RMBVivid

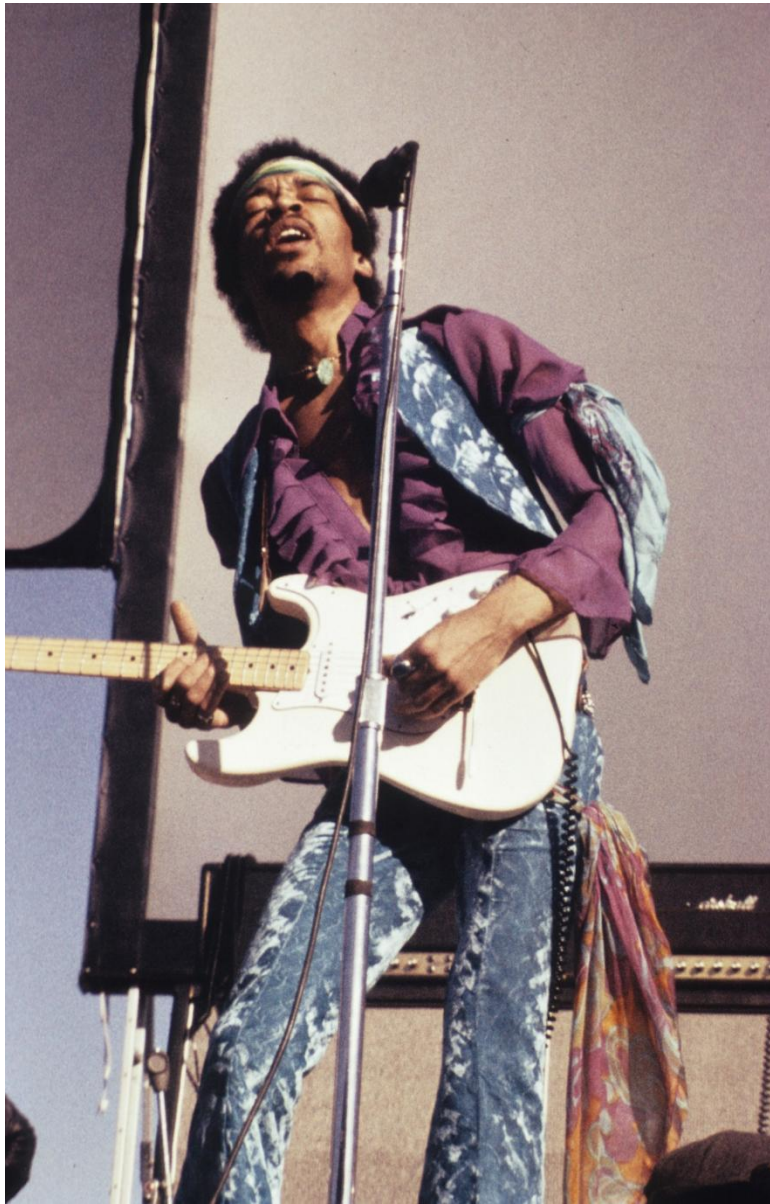

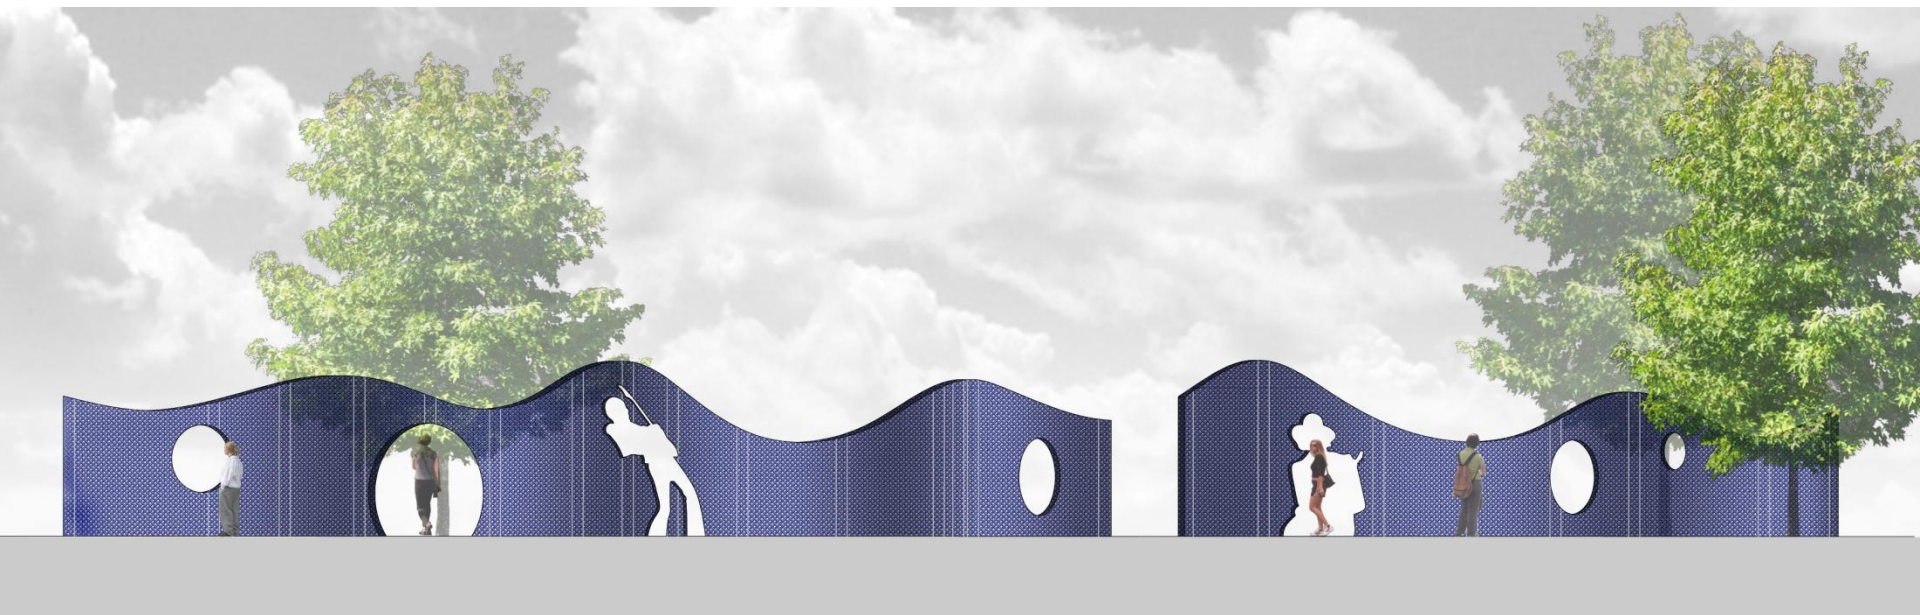


SOUND WALL FEATURE

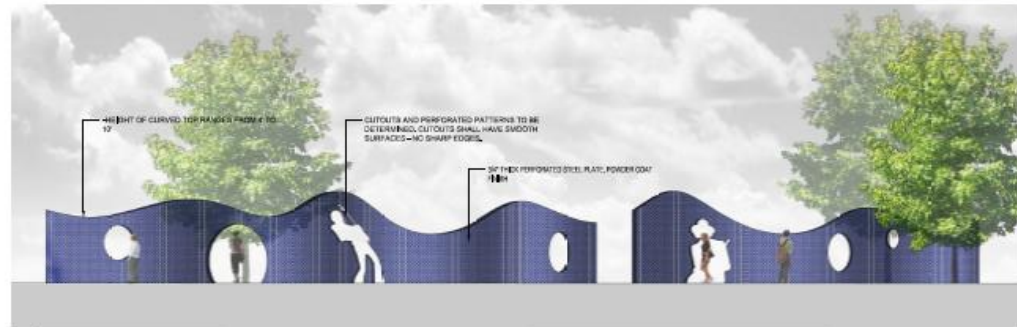


4 WAVE WALL ELEVATION
SUA

NOTES:
 • CUTOUTS AND PERFORATED PATTERNS TO BE DETERMINED.
 • CUTOUTS SHALL HAVE SMOOTH SURFACES—NO SHARP EDGES.
 • HEIGHT OF CURVED TOP RANGES FROM 4' TO 10'

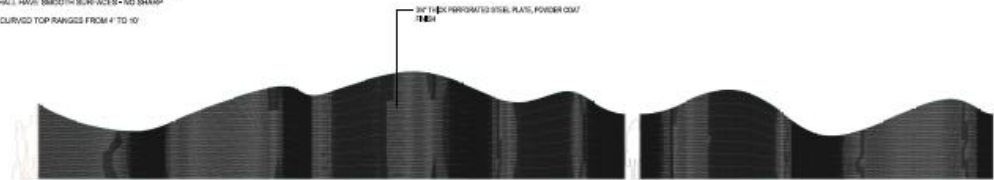

3 WAVE WALL ELEVATION
SUA

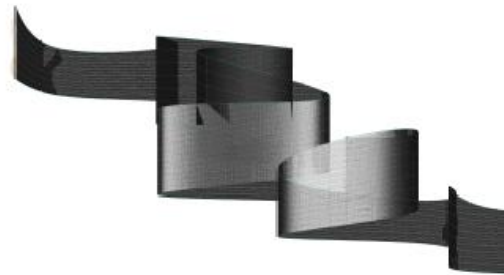

2 WAVE WALL - PERSPECTIVE
SUA



SOUND WAVE FEATURE



Arctostaphylos uva-ursi - Kinnikinnick



Liatris spicata - Spike Gayfeather



Achillea filipendulina - Yarrow



Rudbeckia hirta - Black-Eyed Susan



Penstamon



Fragaria - Wild Strawberry



Echinacea purpurea - Purple Coneflower



Spiraea japonica



Campanula "Bernice"



Myosotis - Forget-Me-Not



Dicentra - Bleeding Heart

BUTTERFLY GARDEN



Paulonia





Betula jacquemontii - Jacquemonti Birch



SITE TREES






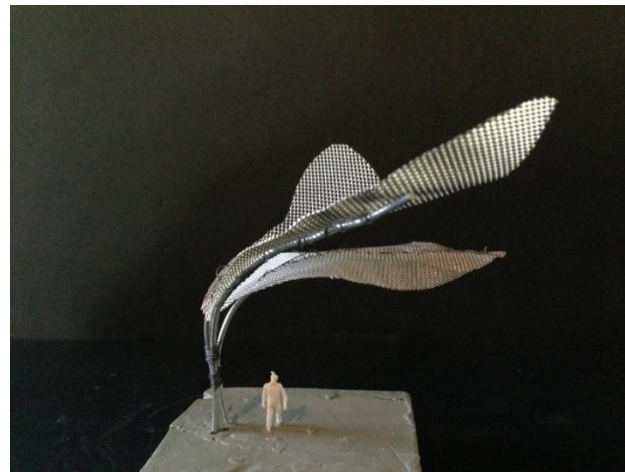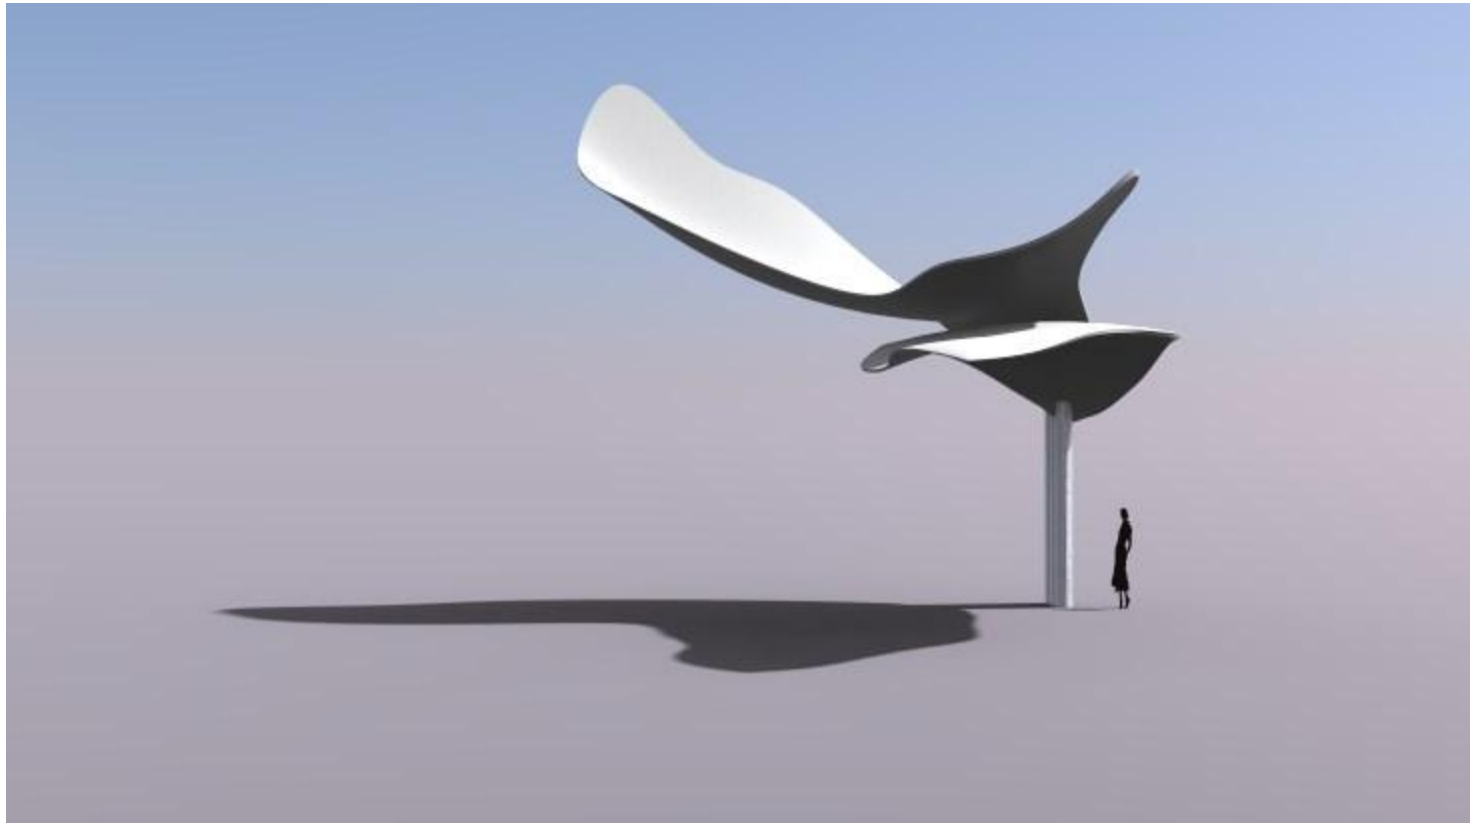


CANOPY

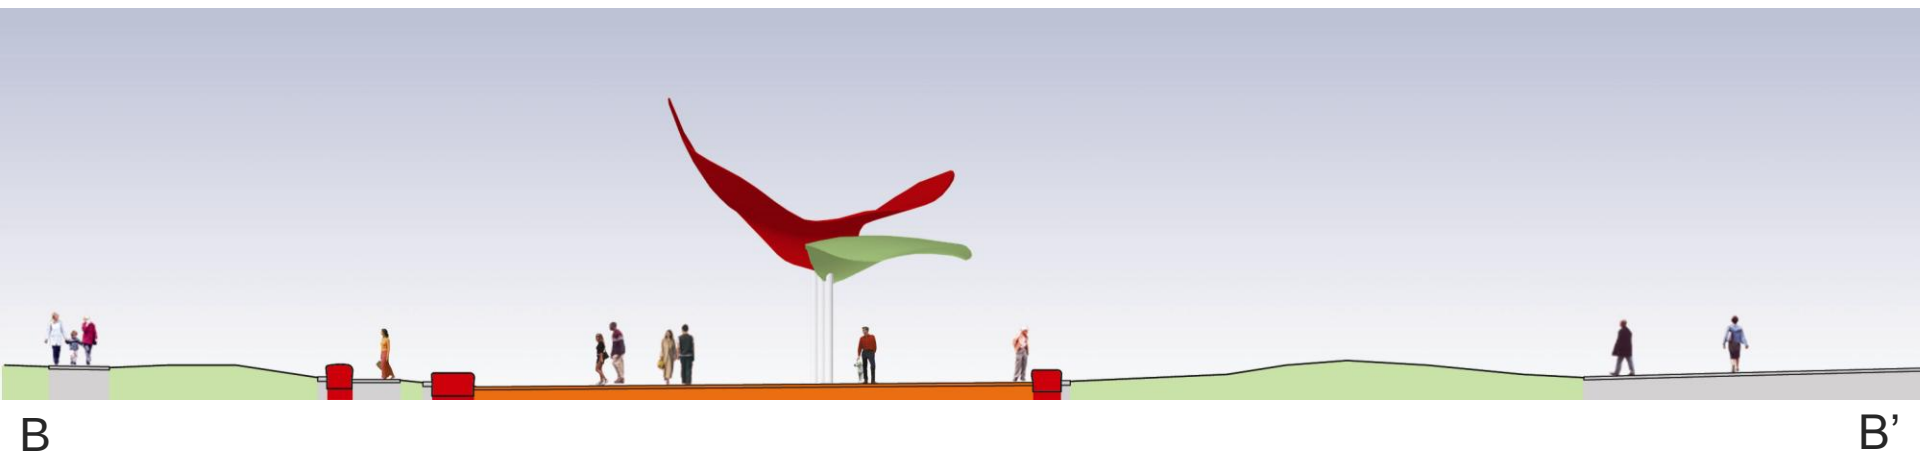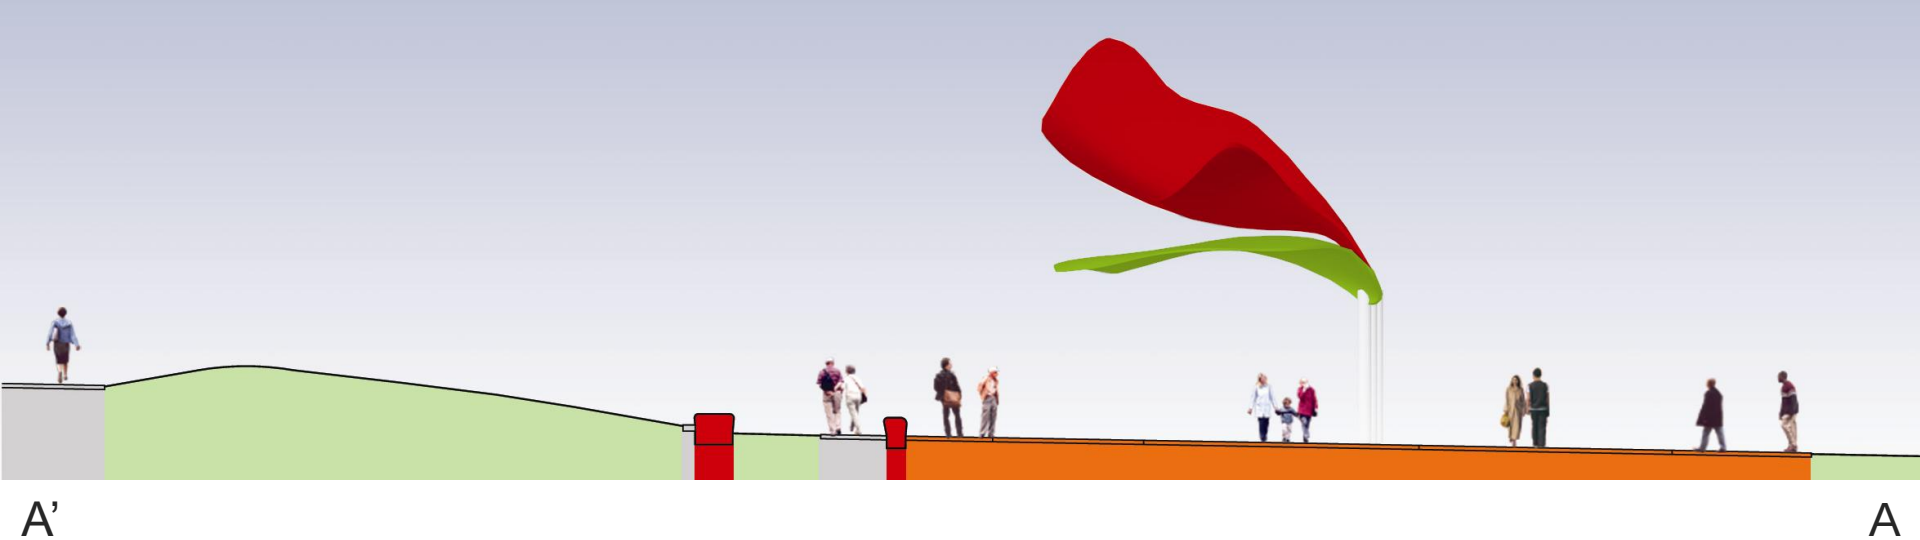


CENTRAL PLAZA

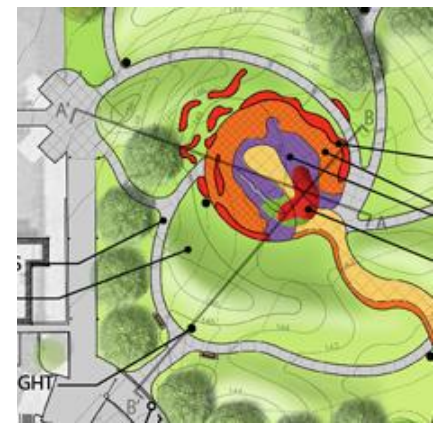

Plan View – Concrete Benches

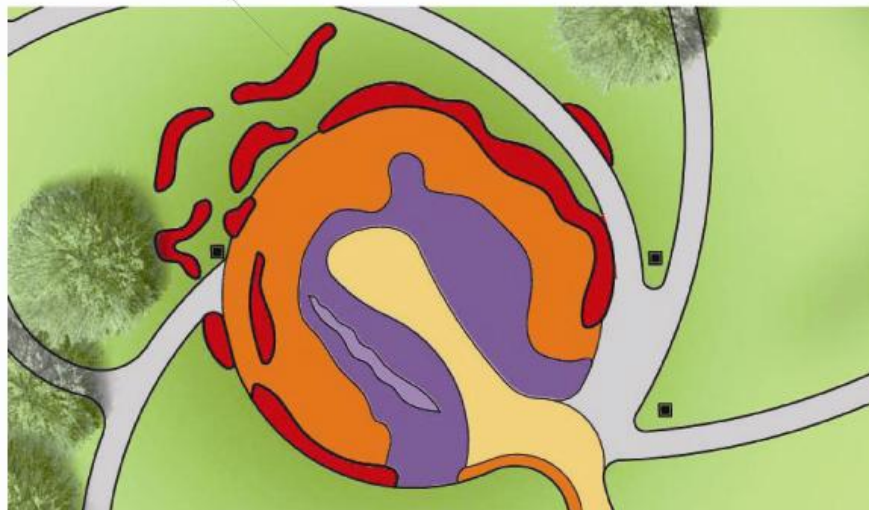

Plan View – Concrete Bench Tops

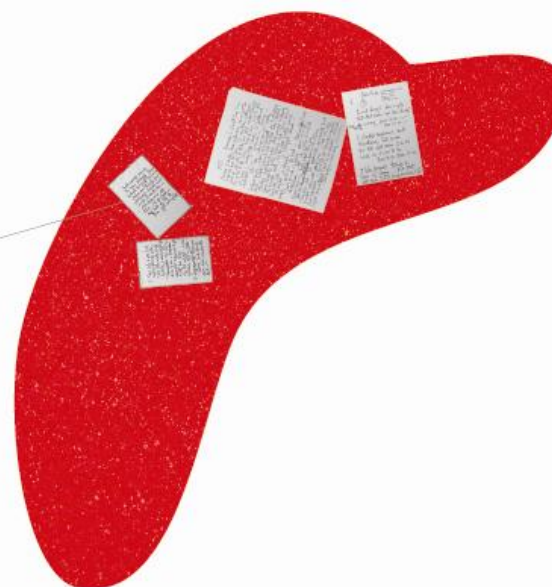

Etched and filled stainless steel inlays
Flush to surface of concrete bench

Press
like
IZABELLA
NO. 1.
ROY TAN

ASTRO MAN and STRATO-WOMAN THE COSMIC LOVERS OF THE UNIVERSE ^{and maybe}

please understand what
I'm trying to say

I love the comics so It's easy
to say ---

I had a dream just the
other day

that I was ASTRO-Man

I'm Astro-man I'm flying higher than
that fagot Superman ...
ever could --- ever would.

They call me ASTRO man ...
If you signal, I'll give you a hand..
to Blow out what I can ...
in the rest of your Mind.

(then thrilling suspense type music comes in
as narrator gives setup of
scene




Midnite lightning ---
flashing ... all around my Horse ...
Love ... please --- Hold me, Hold me ...

~~looks and dark~~ ^{crashing}
tell me why ... It's ~~hitting~~ so close to
our trees and little scenes ---
2. Thunder ... ~~clashing~~ the church bells ^{turning} at 12 ~~to~~ ^{cheers}.


Blue light flashing ... Shadows leap in ^{lightning}
~~flashes~~ ... of nites - spent in the past
years of the Barn full of -
full of witches and ghosts of dreams.
and Happy Queens.

Jimi Hendrix handwritten lyrics, etched, filled and contoured
natural finish stainless inlays, flush to top surface of concrete bench

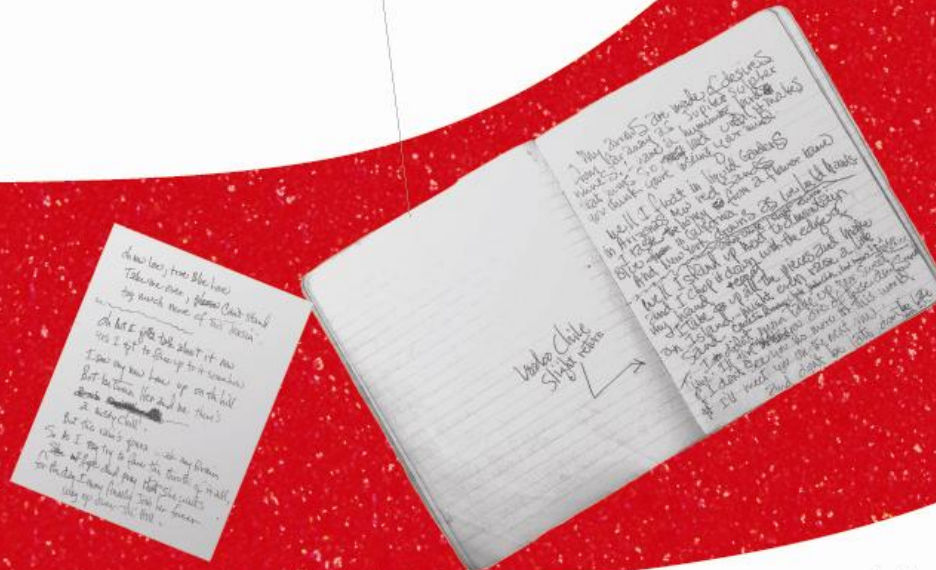

Plan View – Concrete Bench Top Detail

Plan View – Concrete Bench Top Detail

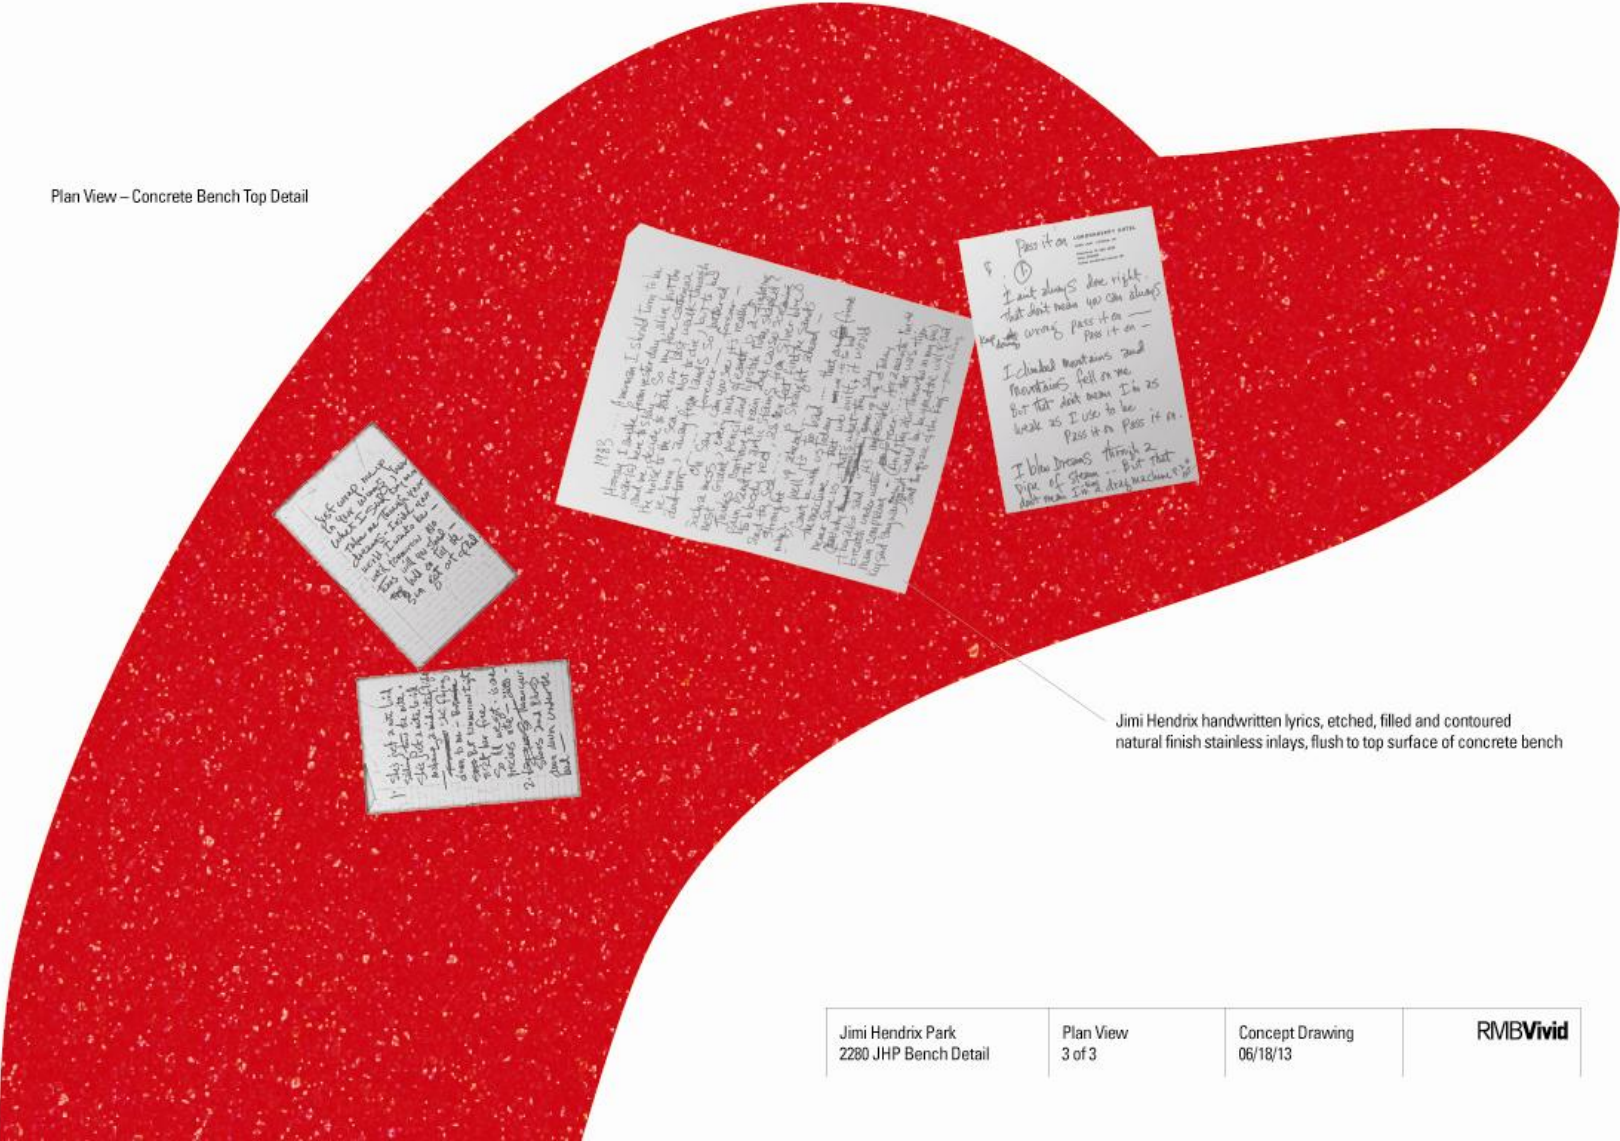

Jimi Hendrix Park
2280 JHP Bench Detail

Plan View
3 of 3

Concept Drawing
06/18/13

RMBVivid


Specialty Paving

Product: Lithocrete

Description:

Poured in place concrete
Integral color
Surface seeded aggregates,
Saw-cut joints

Pricing: \$22 per square foot

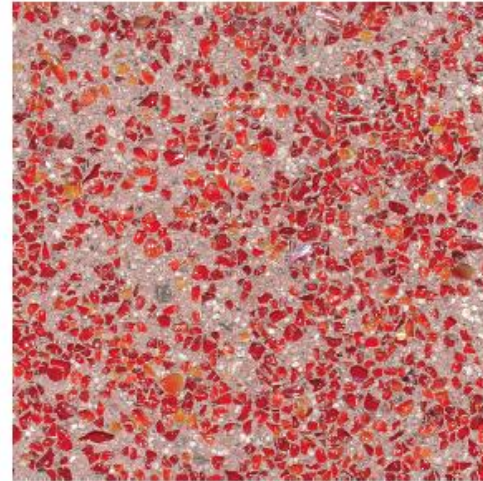

Detail of Lithocrete paving with red glass



Lithocrete Paving with saw-cut joints

PROVIEW SUBMITTAL


Site Furnishings

Concrete Seat Walls

Description:

- Cast-in-place concrete with reinforcing
- Saw-cut joints
- With possible art overlay of embedded text

Pricing: \$220 per lineal foot

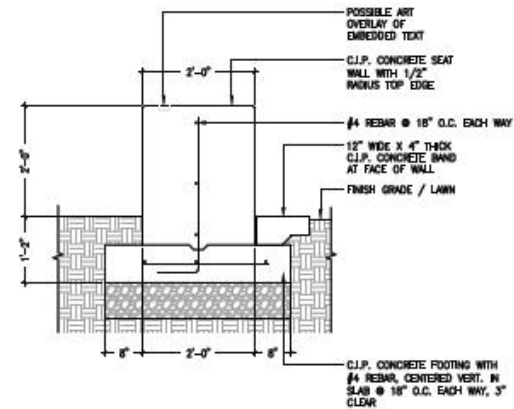

seat wall detail

Lakeside Litter Receptacle

Manufacturer: Landscape Forms

Description:

- Side-opening, plain
- Powdercoat color "silver"
- Surface Mounted
- Unit is emptied by lifting trash bag from the top.

Pricing: \$970 ea.



select powdercoat color "silver" (not pictured)

PROVIEW SUBMITTAL




LANDSCAPE FORMS 'BOLA' BIKE RACK



FORMS+SURFACES 'KNIGHT' BENCH

PROVIEW SUBMITTAL

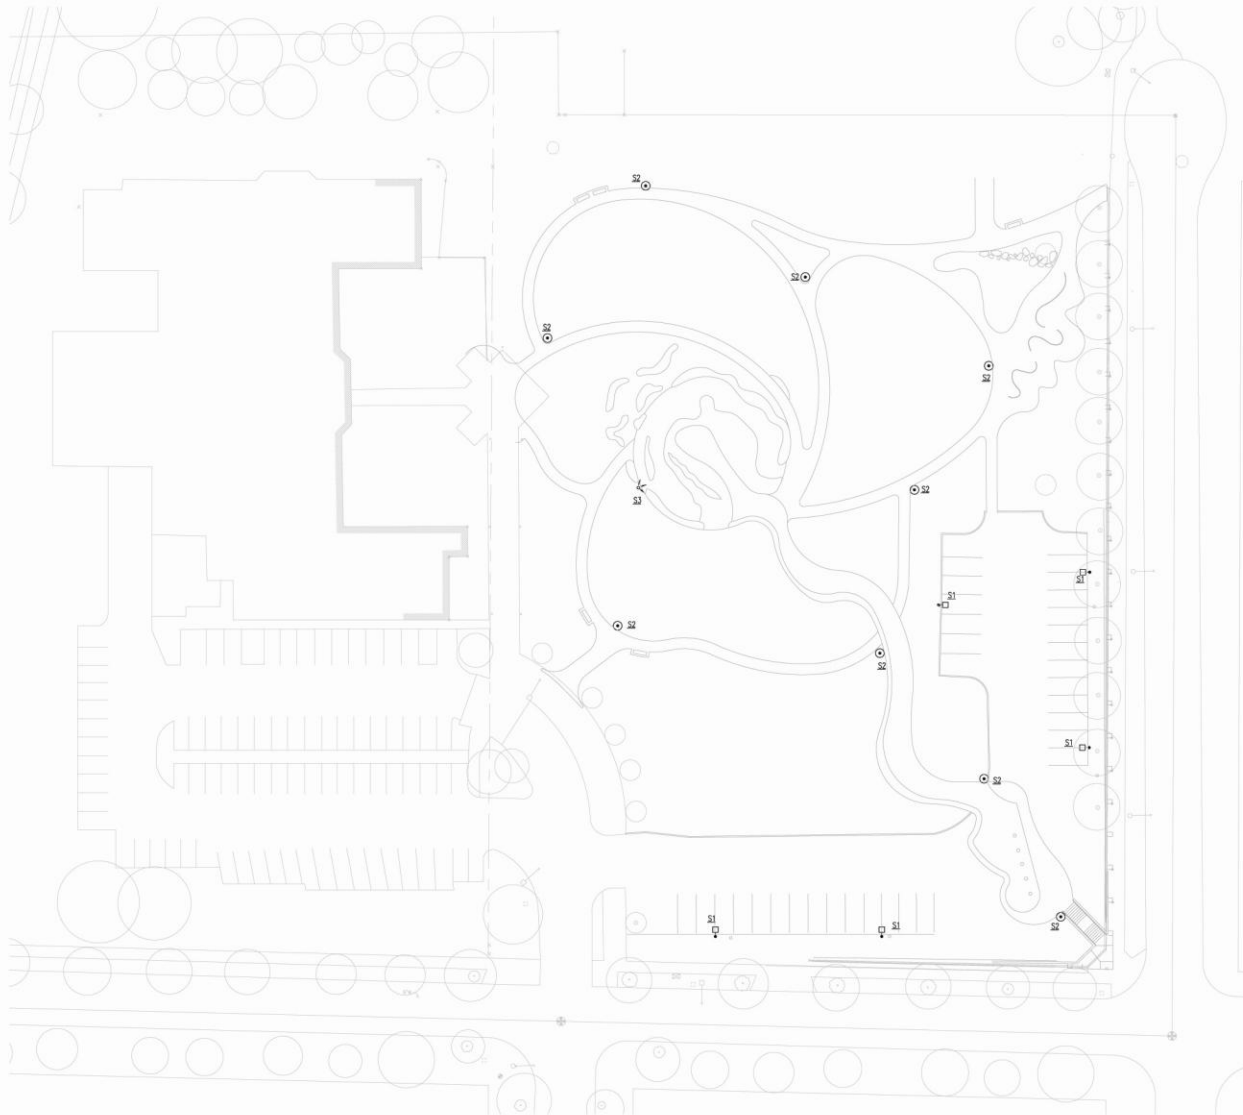

1 SITE PLAN - LIGHTING - OPTION A
12.000 SCALE: 1" = 20'-0"

GENERAL NOTES:

1. PER ILLUMINATING ENGINEERS SOCIETY (IES) RP-20-88, PARKING AREAS SHOULD BE LIGHTED TO A 2 MIN. WITH A 20:1 MAX TO MIN ILLUMINATION LEVEL.
2. FOR IES RP-33-89 PEDESTRIAN WALKWAYS SHOULD BE LIT TO A MIN. AVERAGE OF .5fc.
3. ALL LIGHTS TO BE EQUIPPED WITH INTEGRAL PHOTO SENSORS TO TURN LIGHTS OFF DURING DAYLIGHT HOURS.

LUMINAIRE SCHEDULE

- S1: POLE MOUNTED AREA LIGHT
1. SIZE: 18 INCH DIAMETER X 24 INCH LONG X 7 INCH HIGH
 2. LAMP: LED ARRAY, 4000K, 70 CRI MIN 4837 LUMENS AT 59 WATTS MIN. MODULAR ARRAY FOR EASE OF REPLACEMENT
 3. BALLAST: VOLTAGE AS REQUIRED, INTEGRAL ELECTRONIC POWER SUPPLY AND DRIVER
 4. CONTROL: INTEGRAL PHOTO CELL TO TURN LIGHT OFF DURING DAYLIGHT HOURS. HOUSE SIDE SHIELD ON FIXTURES ADJACENT TO THE STREET TO PREVENT LIGHT SPILL BEYOND THE SITE.
 5. POLE: 15 FOOT SQUARE ALUMINUM POLE.
 6. OPTICS: TYPE W DISTRIBUTION WITH HOUSE SIDE SHIELD AS NOTED ABOVE
 7. FINISH: POWDERCOAT STANDARD FINISH. COLOR TO BE SELECTED BY THE LANDSCAPE ARCHITECT
 8. MANUFACTURER: LITHONIA OMERO MHP-LED, KIM, OR APPROVED
- S2: POLE MOUNTED PEDESTRIAN LUMINAIRE
1. SIZE: 18 INCH DIAMETER X 7 INCH HIGH
 2. LAMP: LED ARRAY, 4000K, 70 CRI MIN 4837 LUMENS AT 59 WATTS MIN. MODULAR ARRAY FOR EASE OF REPLACEMENT
 3. BALLAST: VOLTAGE AS REQUIRED, INTEGRAL ELECTRONIC POWER SUPPLY AND DRIVER
 4. CONTROL: INTEGRAL PHOTO CELL TO TURN LIGHT OFF DURING DAYLIGHT HOURS.
 5. POLE: 12 FOOT ROUND ALUMINUM POLE.
 6. OPTICS: TYPE V DISTRIBUTION WITH HOUSE SIDE SHIELD AS NOTED ABOVE
 7. FINISH: POWDERCOAT STANDARD FINISH. COLOR TO BE SELECTED BY THE LANDSCAPE ARCHITECT
 8. MANUFACTURER: LITHONIA OMERO MHP-LED, KIM, OR APPROVED
- S3: POLE MOUNTED MULTI-HEADED AREA LUMINAIRE
1. LUMINAIRE SIZE: 7 INCH DIA X 9 INCH DEEP X 12 INCH LONG.
 2. LAMP: LED ARRAY, 5000K, 4400 LUMEN HIGH CRI, 23 DEGREE BEAM MODULAR ARRAY FOR EASE OF REPLACEMENT
 3. BALLAST: VOLTAGE AS REQUIRED, INTEGRAL ELECTRONIC POWER SUPPLY AND DRIVER
 4. CONTROL: INTEGRAL PHOTO CELL TO TURN LIGHT OFF DURING DAYLIGHT HOURS. LOCKABLE SWITCH AT POLE BASE FOR MANUAL OPERATION.
 5. POLE: 30 FOOT SQUARE 4 INCH X 4 INCH ALUMINUM POLE.
 6. OPTICS: 23 DEGREE BEAM WITH GLARE SHIELD SHOOT
 7. FINISH: POWDERCOAT STANDARD FINISH. COLOR TO BE SELECTED BY THE LANDSCAPE ARCHITECT
 8. MANUFACTURER: (SH) BEGA 7550 LED ON A SINGLE POLE. ALTERNATE MANUFACTURERS: LUMIAN, SELUX, ERGO, LUMIERE, OR APPROVED

>>>>CAUTION<<<<
CALL BEFORE YOU DIG!
NEVER LESS THAN TWO (2) OR MORE THAN TEN (10) BUSINESS DAYS PRIOR TO COMMENCING EXCAVATION OR DEMOLITION, SECURE THE SERVICES OF A COMMERCIAL UNDERGROUND UTILITIES LOCATOR SERVICE TO IDENTIFY BELOW-GROUND IMPROVEMENTS THAT MAY NOT BE INDICATED ON THE DRAWING. FOR IRRIGATION SYSTEMS, CALL SEATTLE PARKS IRRIGATION SHOP (206) 884-1070.
>>>>800 424 5555<<<<

100% DESIGN DEVELOPMENT

1		
2		
3		
NO.	REVISION	DATE

REVIEWED: _____
DATE: _____
PAE CONSULTING ENGINEERS, INC.
800 3rd Ave, Suite 200 | Portland, OR 97204 | P: 503 228-2021
400 California St., Suite 1500 | San Francisco, CA 94104 | P: 415 398-1988
Project No: 11-1802

PAE CONSULTING ENGINEERS, INC.
800 3rd Ave, Suite 200 | Portland, OR 97204 | P: 503 228-2021
400 California St., Suite 1500 | San Francisco, CA 94104 | P: 415 398-1988
Project No: 11-1802

MURASE ASSOCIATES
1015 1st Ave, Suite 100 | Seattle, WA 98101
P: 206 461-1111 F: 206 461-1112
www.murase.com

SEATTLE PARKS AND RECREATION
FRIENDS OF JIMI HENDRIX PARK

JIMI HENDRIX PARK

SITE PLAN - LIGHTING

DESIGNED: GCP/ZS	DATE: 31 JAN 2023
DRAWN: JCS	SHEET: 22 OF 23
CHECKED: GP	E2.00A
ORDINANCE NO.: E	
CONTRACT NO.: E	
SCALE: 1" = 20'	



Portland | San Francisco | Seattle
Lumaltd.com

LIGHTING PLAN




IN-GRADE FLOOD LIGHT BY BEGA



PEDESTRIAN HEIGHT POLE TOP
LUMINAIRE BY BEGA

LIGHTING

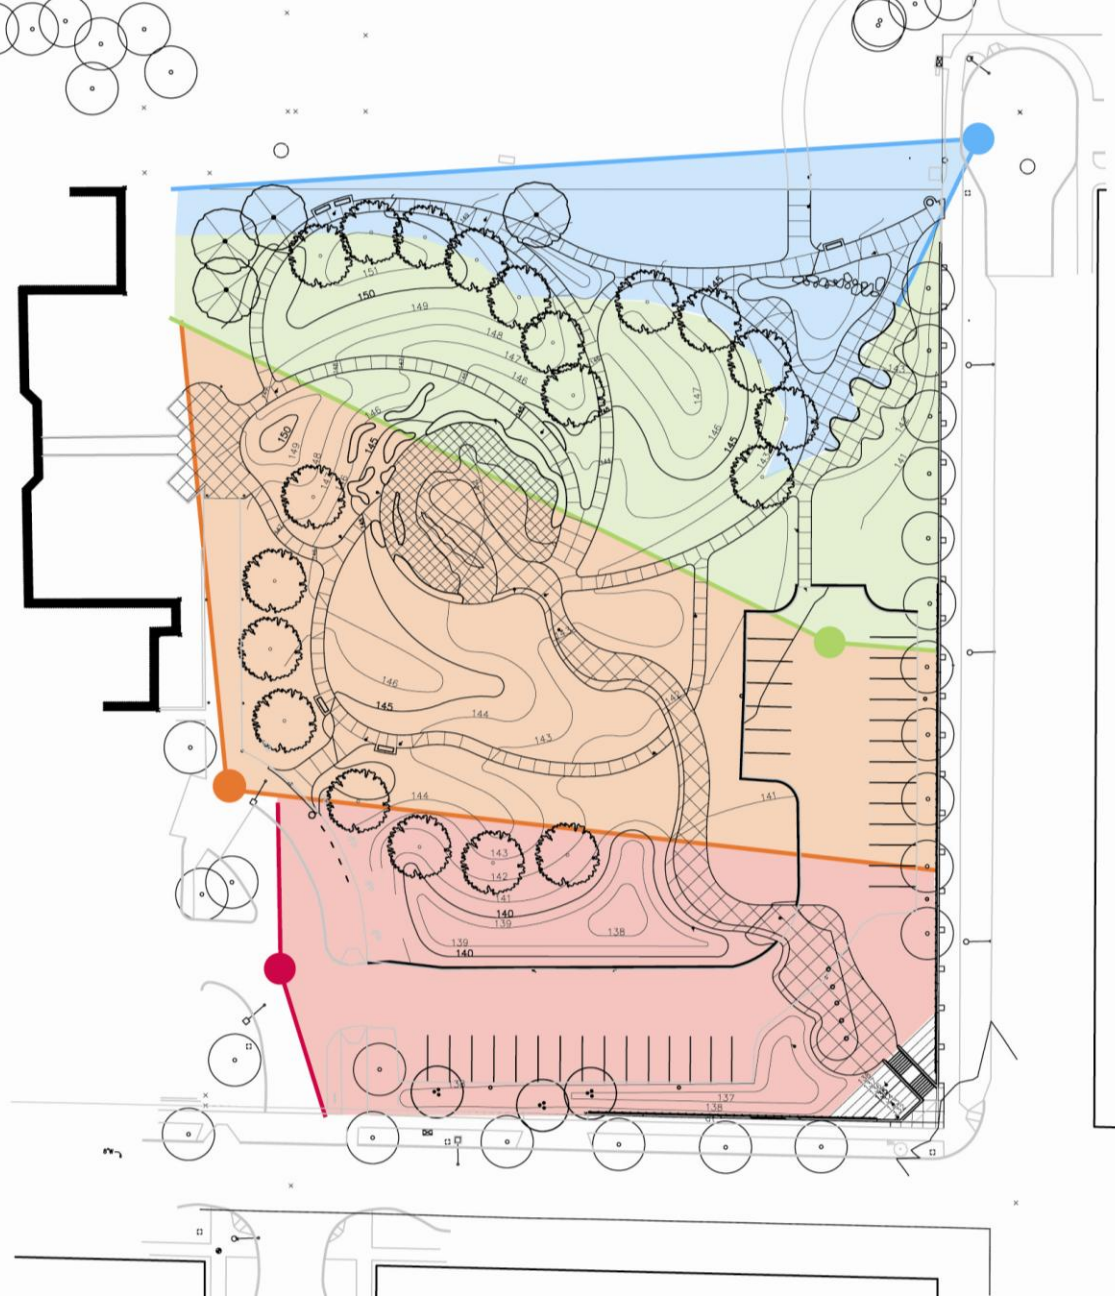

VIEW CORRIDOR STUDY

PROVIEW SUBMITTAL

PROVIEW SUBMITTAL

Trees

Botanical name: *Betula jacquemontii*, multi-trunk

Common name: Multi-trunked Himalayan Birch

Description:

Deciduous

White bark

Yellow fall color

Full sun

Ability to withstand saturated soils

Drought tolerant

Design intent:

Contrasting bark provides year-round interest



Birch trees in summer



Birch trees in winter

Shrubs

Botanical name: *Callicarpa bodonier*
Common name: Beautyberry bush

Description:

Medium to large deciduous shrub
Fall berries
Full sun
Attracts birds

Design intent:

Arching branches with distinctive purple berries
repeat purple theme into fall.



Unique purple berries

Botanical name: *Kerria japonica*
Common name: Kerria

Description:

Medium to large deciduous shrub
Shade to Full sun
Fast growing
Drought tolerant
Yellow spring blossoms

Design intent:

Provides intense and vivid spring color.



Yellow flowers in spring

Shrubs

Botanical name: *Viburnum davidii*

Common name: David Viburnum

Description:

Low evergreen shrub
Extremely hardy
Part to full sun
Attracts birds

Design intent:

Creates a hardy and evergreen carpet at the corner entry feature.



Fall fruit

Vines

Botanical name: *Parthenocissus tricuspidata*

Common name: Boston Ivy

Description:

Deciduous woody vine
Extremely hardy
Part to full sun
Excellent fall color

Design intent:

Cover existing concrete wall with vines to provide an inexpensive green element and to discourage graffiti.



Fall color

Rain Garden Plants

Botanical name: *Iris pseudacorus*

Common name: Yellow iris

Description:

Herbaceous perennial

Bright yellow flowers

Tolerates submersion

Bird habitat

Design intent:

Provides vertical structure and color in the rain garden plantings.



Long spring bloom

Botanical name: *Juncus effusus*

Common name: Soft rush

Description:

Evergreen grass

Clumping

Tolerates submersion

Easy care

Design intent:

Tough plant that crowds out weed and provides year long interest.



Soft rush tolerates poor soils

Rain Garden Plants

Botanical name: *Cornus kelseyii*
Common name: Dwarf red-twig dogwood

Description:

Compact deciduous shrub
Winter interest
Ability to withstand saturated soils
Full sun
Drought tolerant

Design intent:

Low, mounding habit crowds out weeds and provides exciting winter contrast.



Bright winter interest.

Botanical name: *Symphoricarpos albus*
Common name: Snowberry bush

Description:

Medium deciduous shrub
Winter white berries
Shade to Full sun
Fast growing
Drought tolerant
Bird habitat


Design intent:




Contrasting open habit as counterpoint to dense plantings.

White berries in winter repeat white in adjacent Birch bark.




Delicate summer foliage.

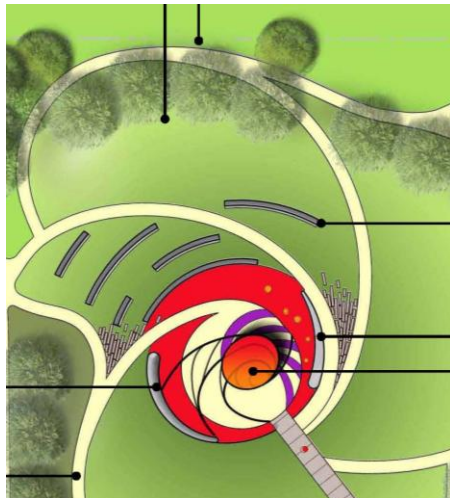

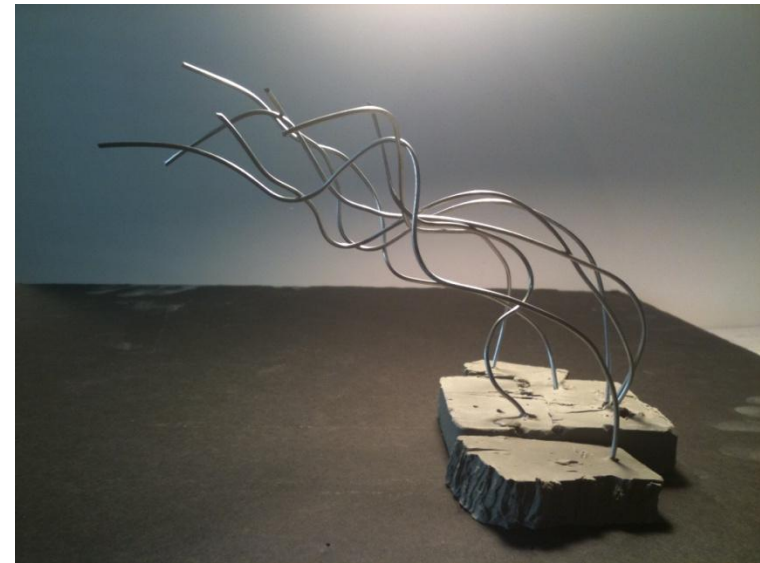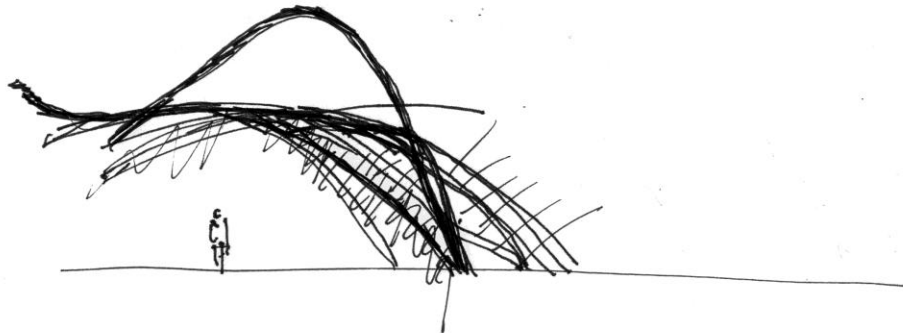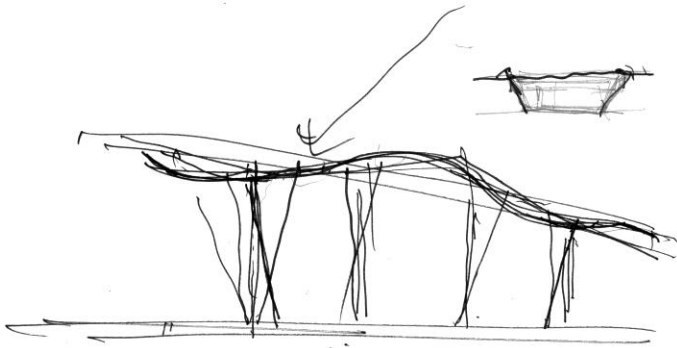

CENTRAL CANOPY

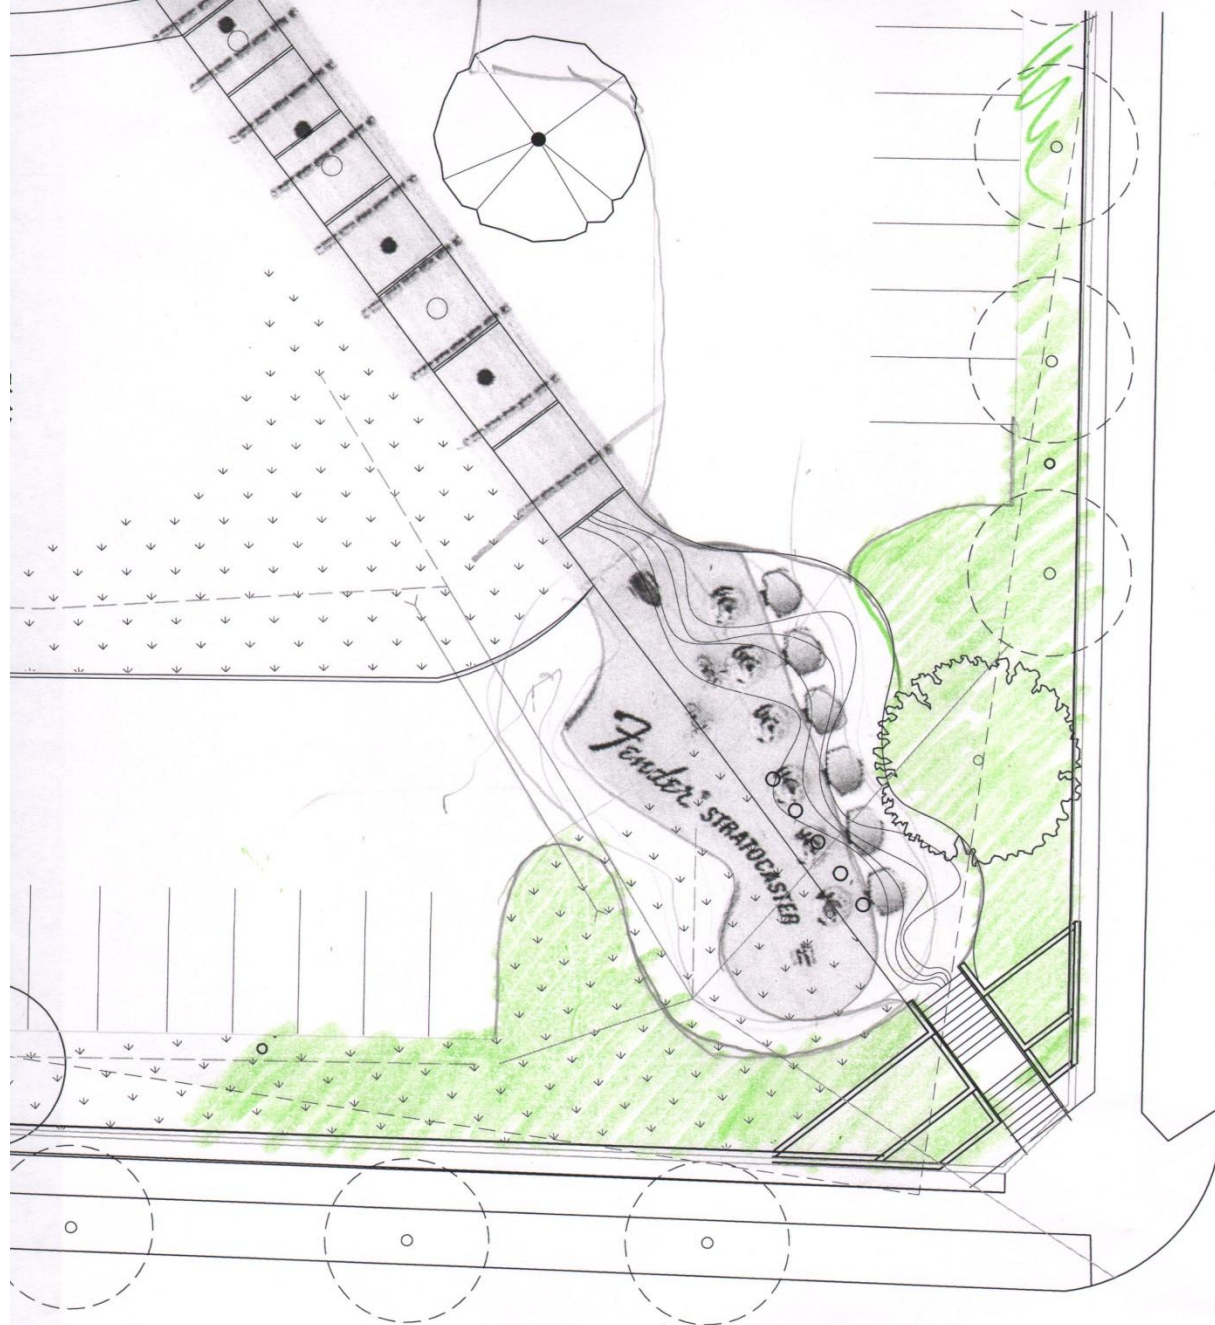

1/16" = 1'



Image generated by AI

GUITAR




LITTLE WING




SPIRAL FLOWER





RAINWATER CANOPY



CENTRAL CANOPY



SCULPTURAL SEATING SHELTERS

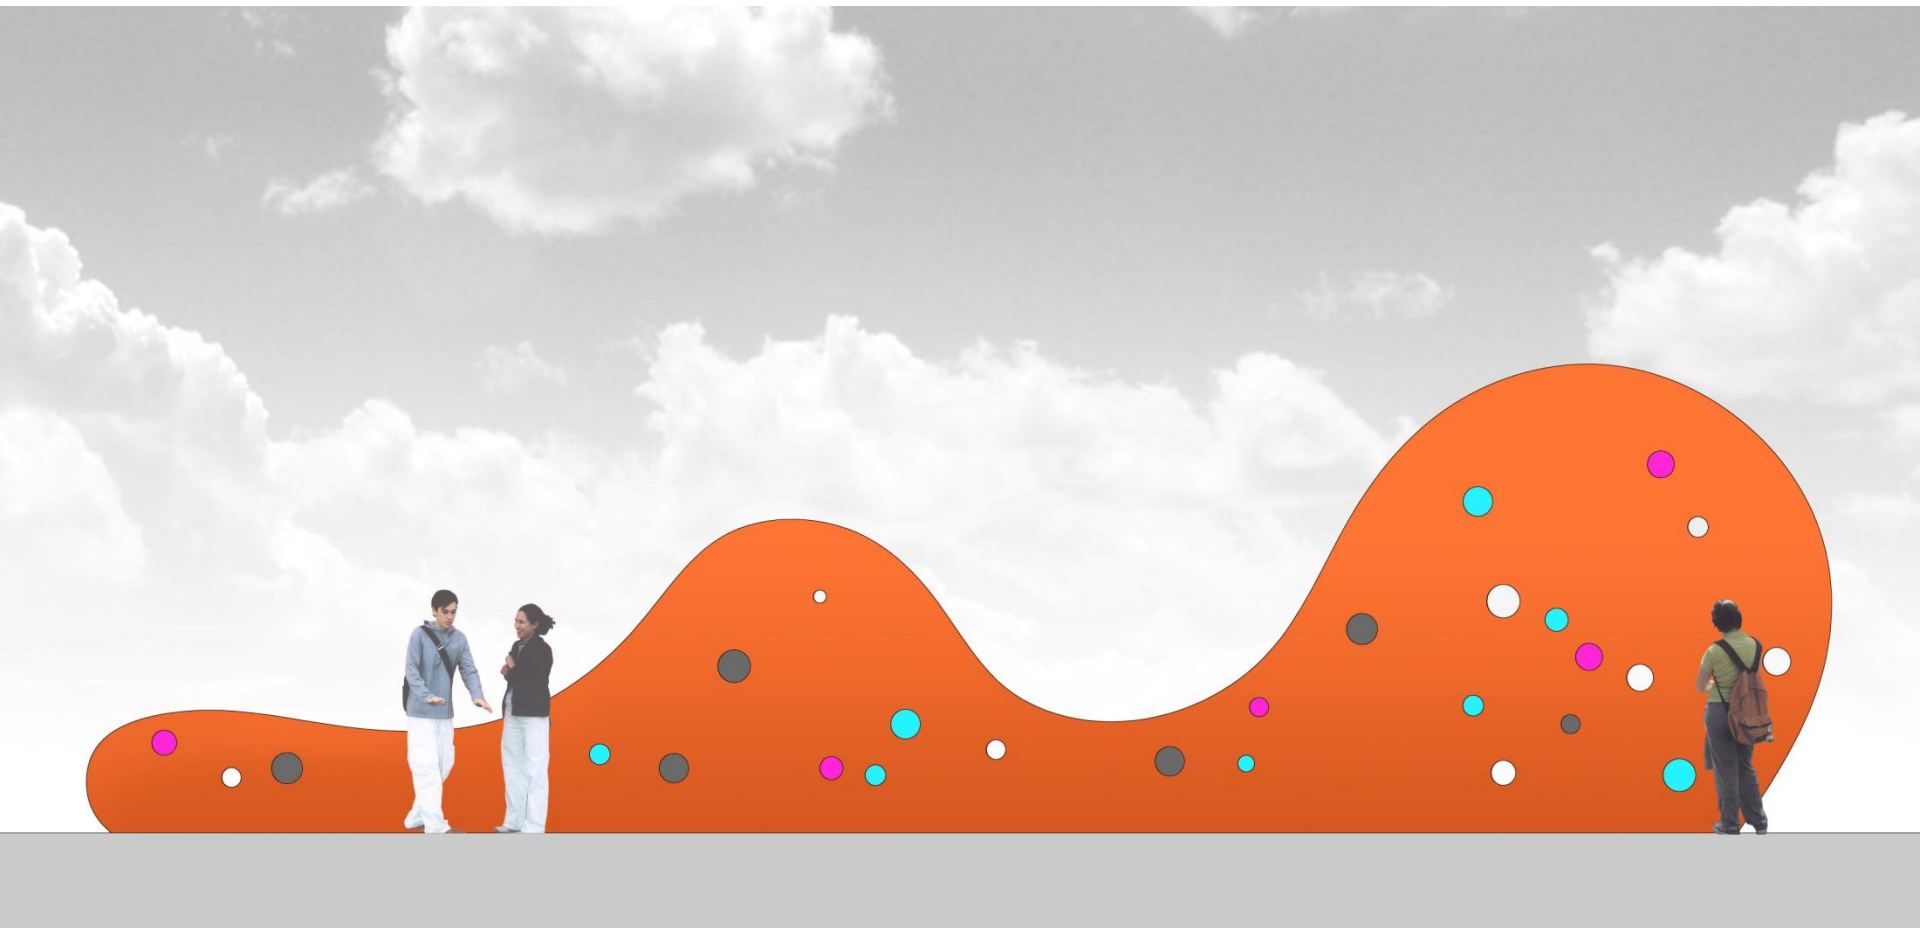

WALL OF SOUND

A word cloud of descriptive terms for a creative individual. The words are arranged in a dense, overlapping cluster. The colors used include shades of purple, blue, green, yellow, and orange. The sizes of the words vary, with larger words indicating higher frequency or importance.

Words included in the word cloud:

- Inspirational/Influential
- Global
- Flamboyant
- Expanded-black-culture
- hero
- Bold
- New
- Energy
- On-the-edge
- Individual
- Open-mind
- Cool
- Isolated
- Exciting
- Best-of-the-best
- Blessed Ahead
- Performer
- Psychedelic
- Sensitive
- Movement
- Trend-setter
- Adventurous
- time
- Peace
- Rock-and-roll
- Multi-generational
- Jazz
- Extraordinary
- Exuberance
- Future
- Timeless
- Creative
- Genius
- Handsome
- Loud
- Guitar
- Life
- Stylish
- Contemplative
- Celebration
- Black-power
- Dedication
- Poetic
- Love
- Color
- Freedom
- Progressive
- Revolutionary
- Gentile
- Experimental
- Extreme
- Self-driven
- Music
- Spiritual
- Talented
- Classic
- Controversy
- Authentic
- Legend
- True
- Pioneer










JIMI HENDRIX PARK



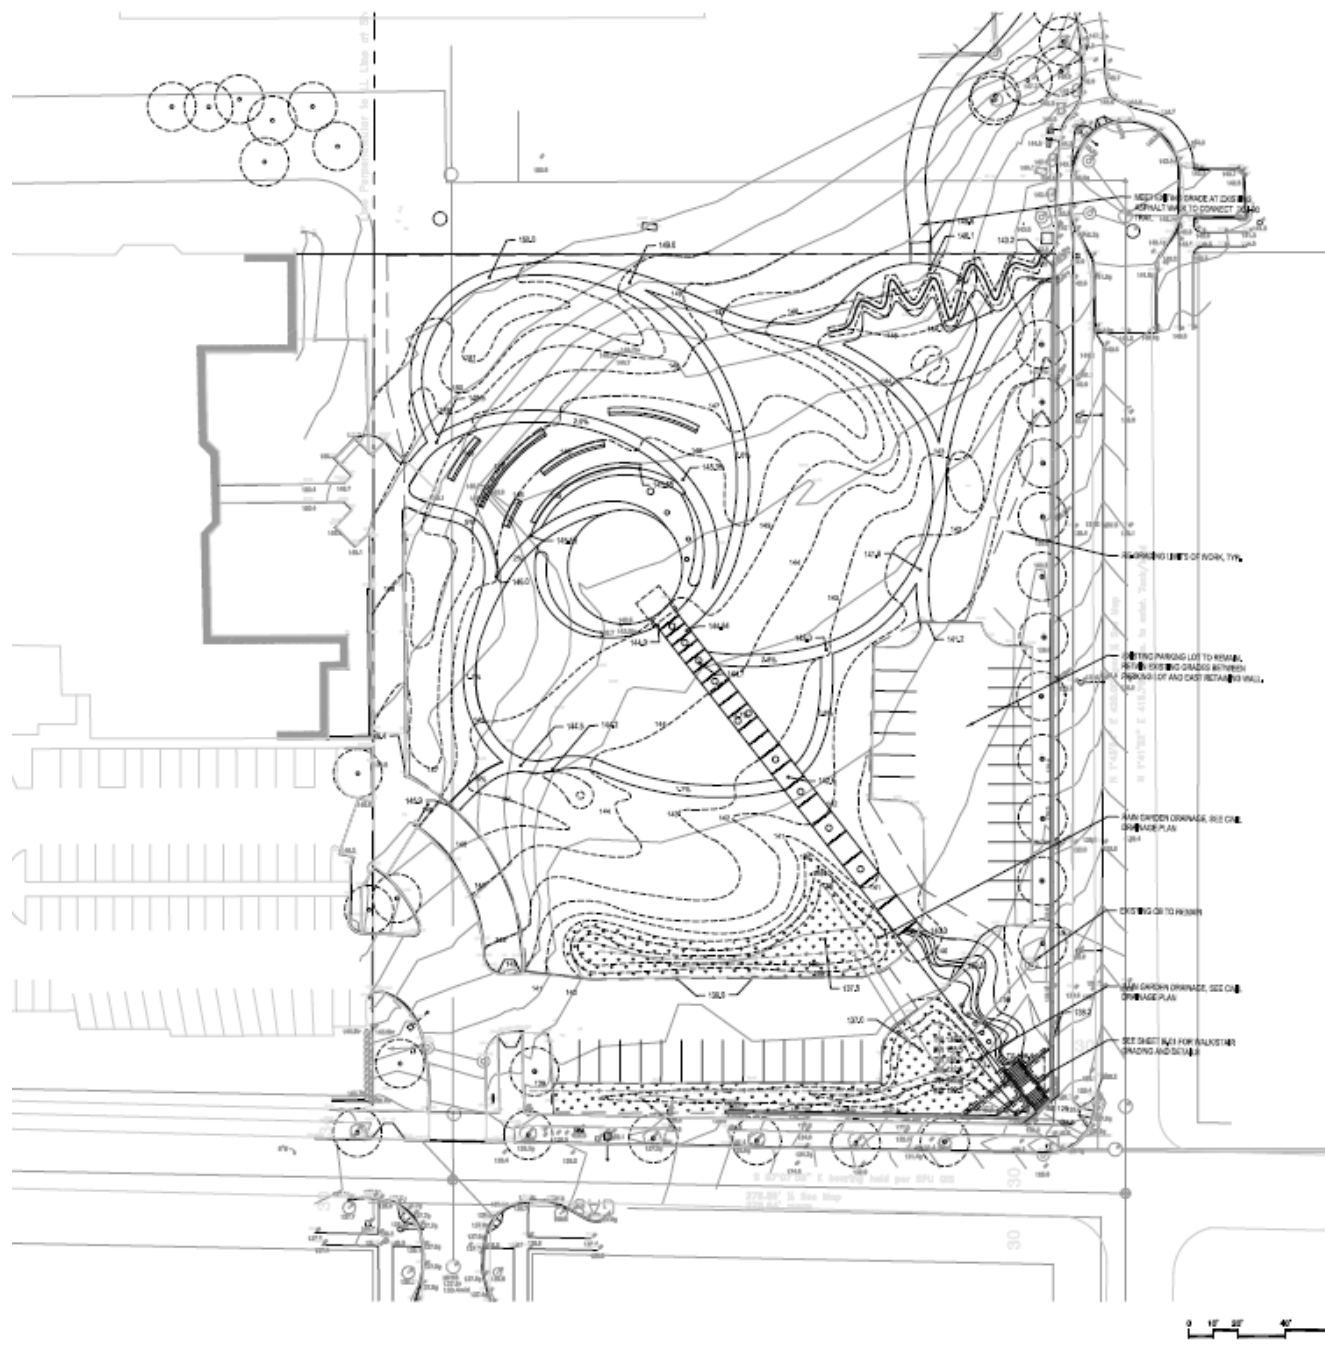





Trees

Botanical name: *Acer saccharum*

Common name: Sugar maple

Description:

Large deciduous tree

Red fall color

Full sun

Ability to withstand saturated soils

Drought tolerant

Design intent:

Nice shade tree with good fall color



Dense summer canopy



Fall color of the Sugar maple