


**OVERHEAD and UNDERGROUND SERVICES - SINGLE CUSTOMER**  
 (Residential, Commercial/Industrial) Meter Installation (0 - 225 Amperes)

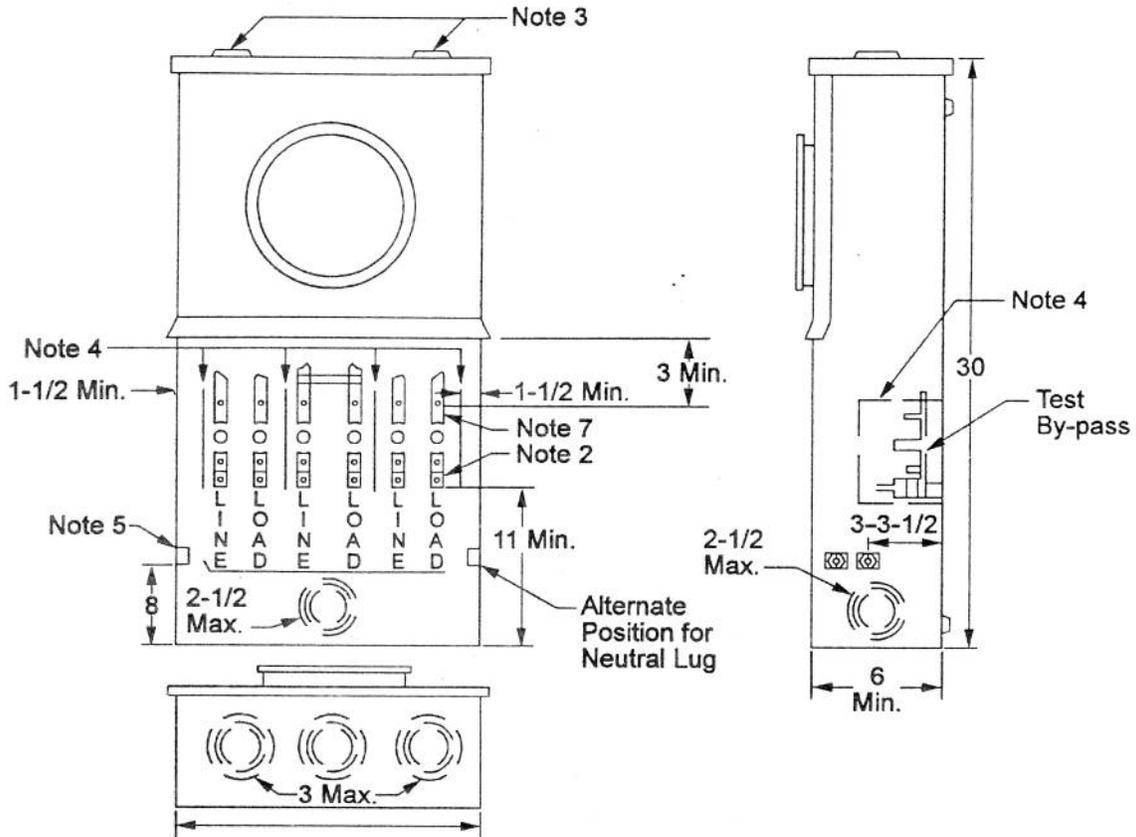

All dimensions shown are in inches

**NOTES:**

1. This device may be used for commercial, industrial and residential services.
2. Aluminum bodied terminals for #6 through #1/0 (100 ampere) or #1/0 through #250 Kcmil (200 ampere).
3. Hubs capped off if used for underground feed.
4. Rigid insulating barriers.
5. Insulated bondable vertical lay-in, double neutral lug with No. 250 Kcmil wire capacity, mounted on either sidewall.
6. Test-bypass blocks shall be bused or wired to socket jaws or terminals.
7. Upper test connector studs.

*Per EUSERC Standard Drawings # 304 & 305*

**Safety Socket Box with Factory Installed  
 Test-bypass Facilities, 200 Ampere, 0-600 volts**