


Matchline
See Below

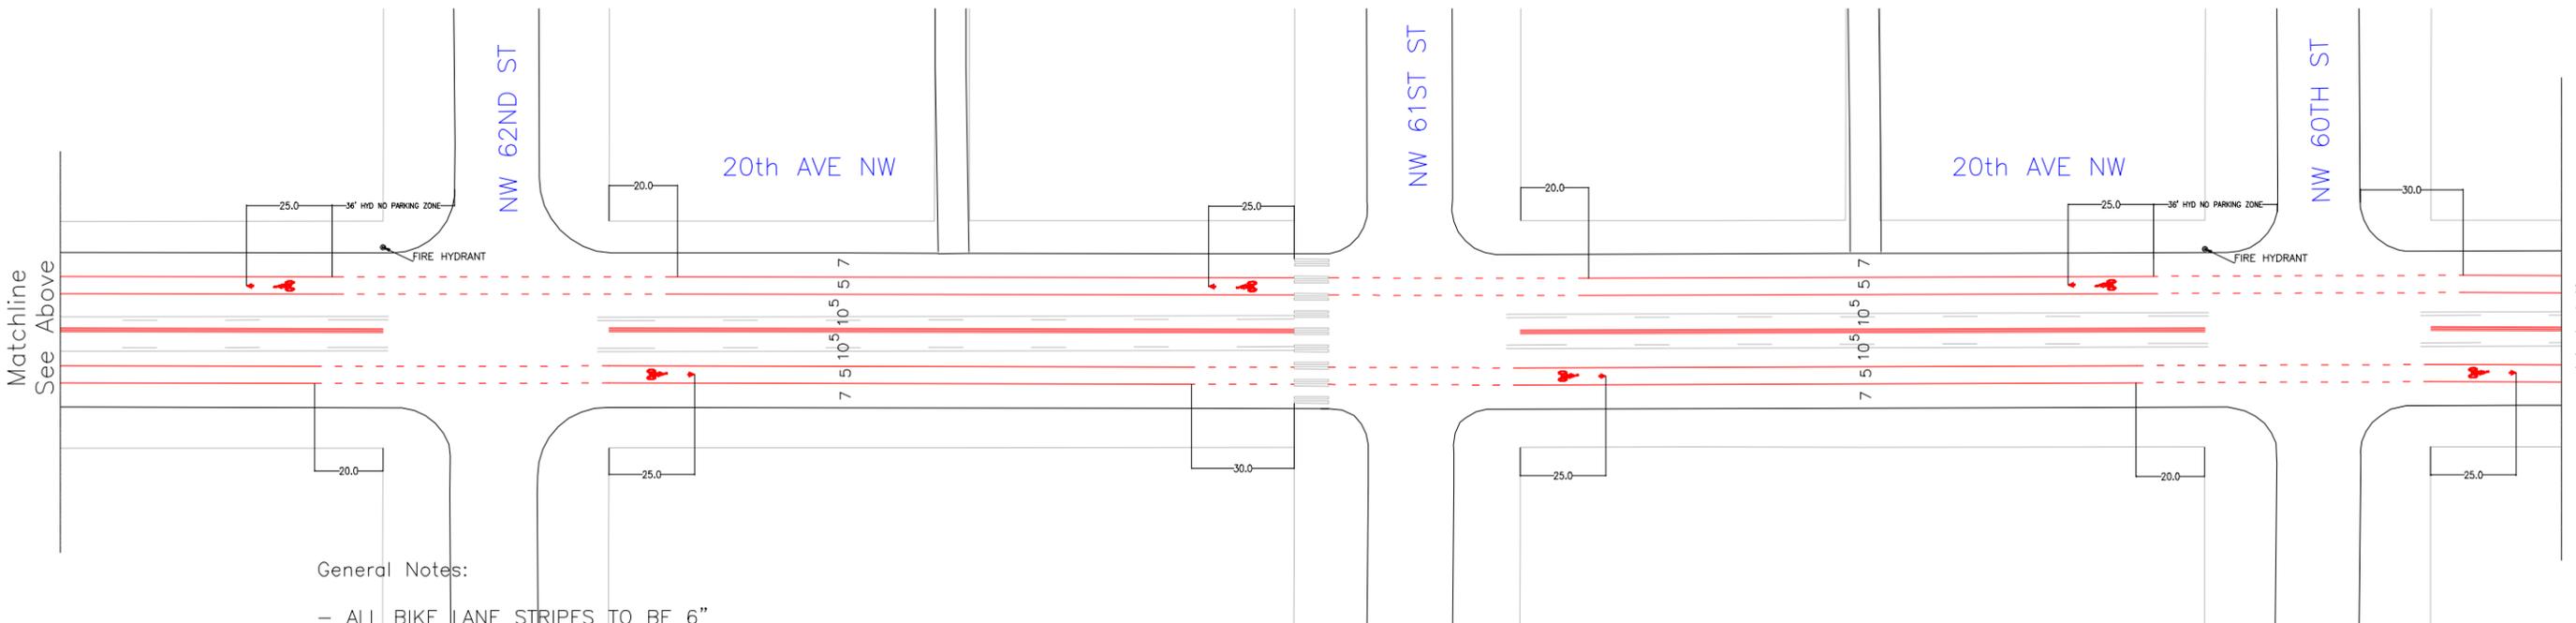



Matchline
See Above

Matchline
See Page 2

General Notes:


- ALL BIKE LANE STRIPES TO BE 6"
- ALL PARKING LANE STRIPES TO BE 4"
- SKIP-DASH STRIPING FOR EITHER BIKE LANE OR PARKING LANE IS 2' DASH WITH A 4' SKIP
- MEASUREMENTS FOR SHARROW ARE TO THE TIP OF THE CHEVRON, AND TO THE TIP OF THE ARROW FOR BIKE LANE LEGEND
- ALL STOP BARS ARE TO BE OFFSET 4' FROM CROSSWALK UNLESS SPECIFIED

SEATTLE DEPARTMENT OF TRANSPORTATION
 TRAFFIC OPERATIONS
 ERIC WIDSTRAND TRAFFIC ENGINEER
 DRAWN BY ARV DATE 8/10/10
 SCALE: 1-50

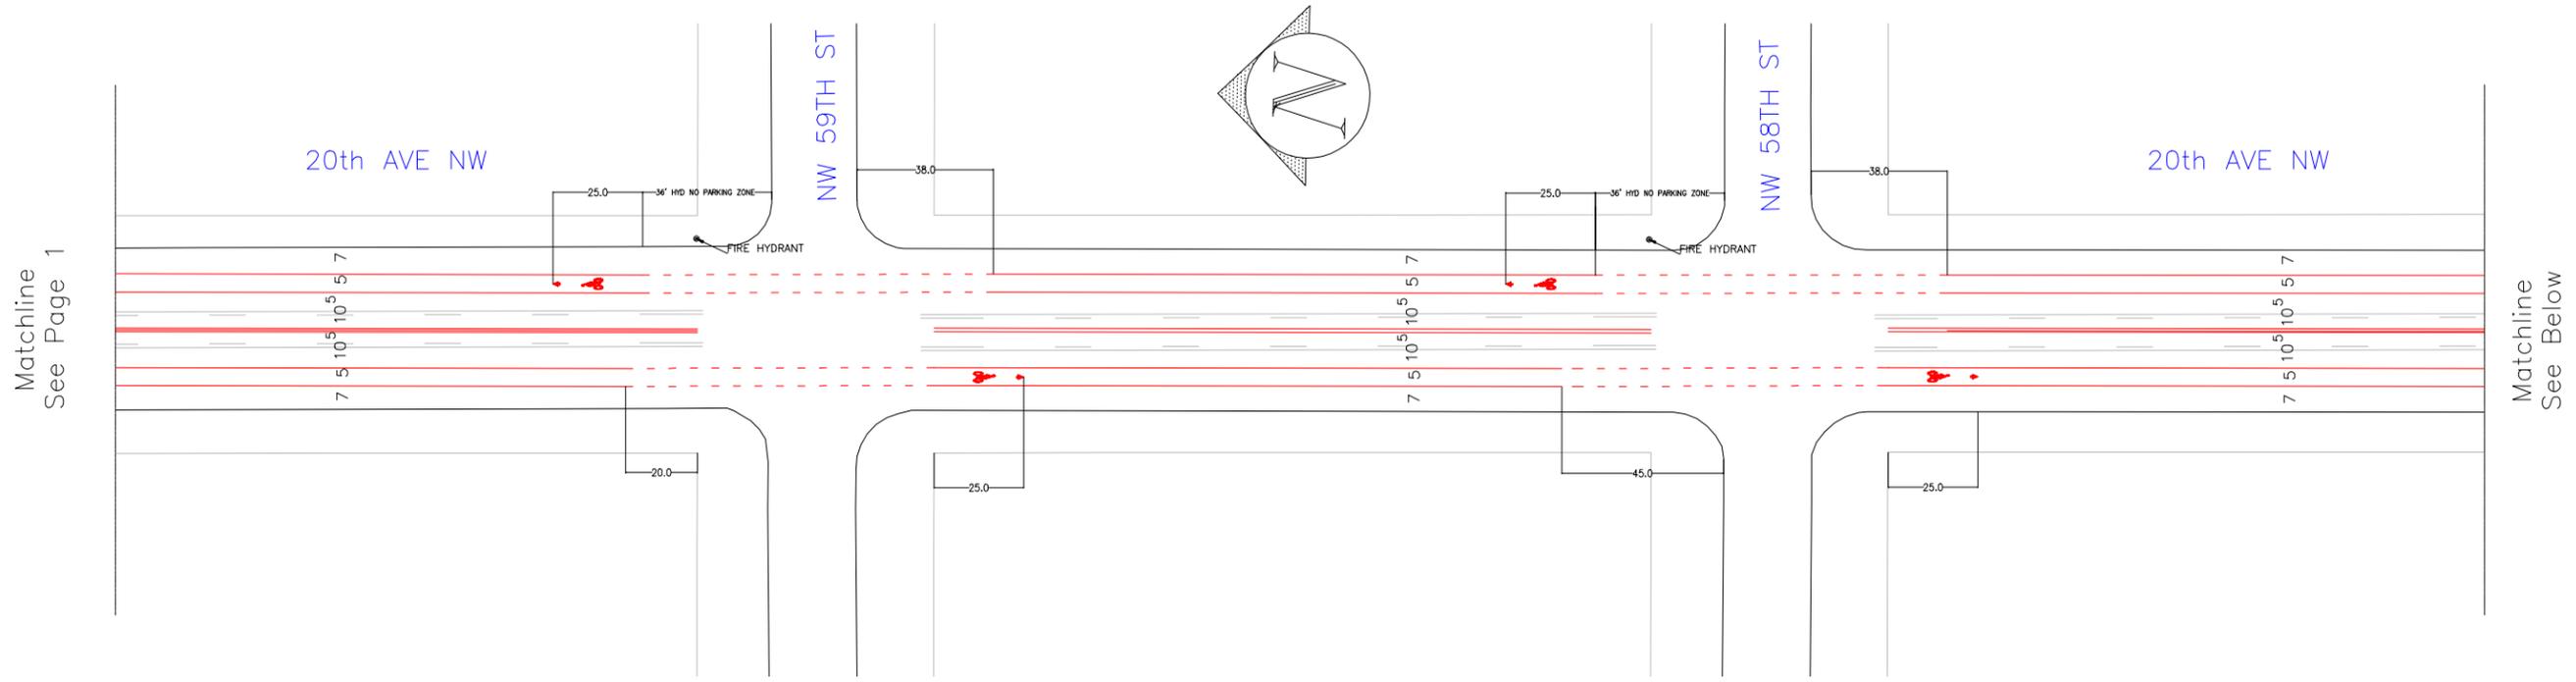

Matchline
See Page 1

Matchline
See Below

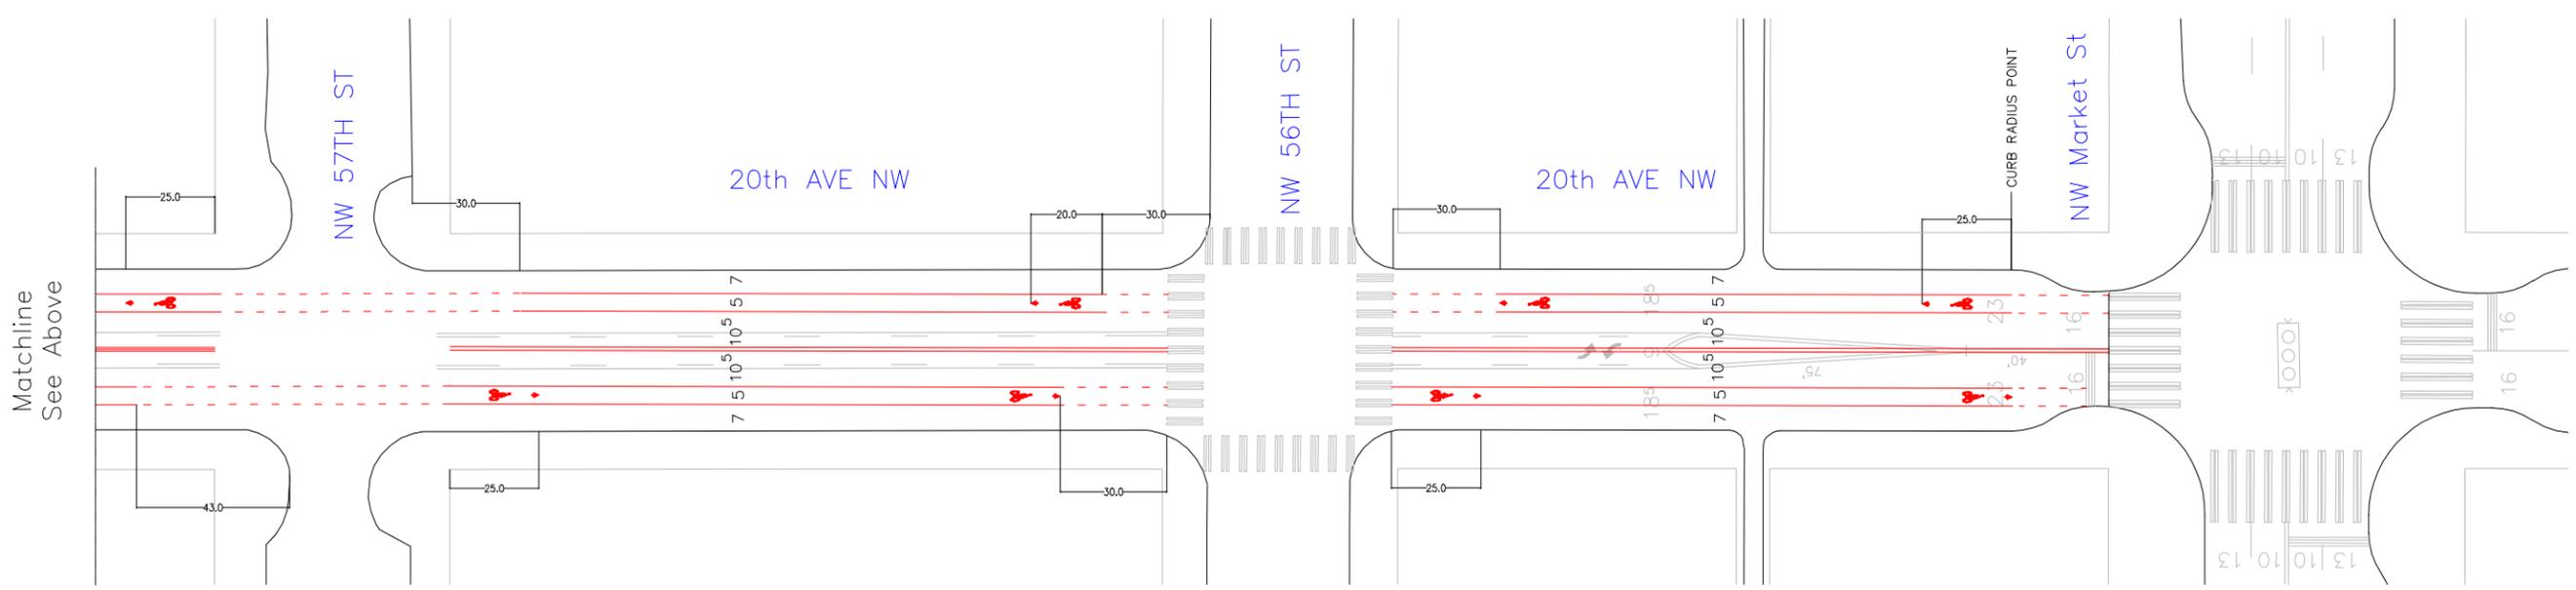

Matchline
See Above

General Notes:

- ALL BIKE LANE STRIPES TO BE 6"
- ALL PARKING LANE STRIPES TO BE 4"
- SKIP-DASH STRIPING FOR EITHER BIKE LANE OR PARKING LANE IS 2' DASH WITH A 4' SKIP
- MEASUREMENTS FOR SHARROW ARE TO THE TIP OF THE CHEVRON, AND TO THE TIP OF THE ARROW FOR BIKE LANE LEGEND
- ALL STOP BARS ARE TO BE OFFSET 4' FROM CROSSWALK UNLESS SPECIFIED

SEATTLE DEPARTMENT OF TRANSPORTATION
 TRAFFIC OPERATIONS
 ERIC WIDSTRAND TRAFFIC ENGINEER
 DRAWN BY ARV DATE 8/10/10
 SCALE: 1-50