

FINAL

Aurora Avenue North Transit, Pedestrian, and Safety Improvement Project

Transportation Analysis Technical Memorandum

PREPARED FOR: Holloway, Diana/Seattle DOT
PREPARED BY: Newkirk, Tim/CH2M HILL
COPIES: Monaghan, Don/CH2M HILL
McKenzie, John/CH2M HILL
Shimizu, Eric/CH2M HILL
File
DATE: July 17, 2006
PROJECT NUMBER: 324876

Introduction

Aurora Avenue North is classified as a statewide urban principal arterial that serves regional and local traffic north of downtown Seattle. It is designated a Highway of Statewide Significance (HSS) and a T-2 statewide freight route by WSDOT and is often used as an alternate route to Interstate 5 because it runs parallel to and west of the interstate.

This technical memorandum summarizes the traffic analysis performed in support of the Aurora Avenue North - Transit, Pedestrian and Safety Improvement Project. This project will widen Aurora Avenue North to a seven (7) lane roadway section comprised of a northbound and southbound business access and transit (BAT) lanes, two general purpose lanes in each direction, a left-turn lane/landscaped center median, curb-and-gutter and a minimum ten-and-a-half feet wide sidewalk with landscaping. The sidewalk area will require consolidation of some business access points and provide new driveways where before there was continuous shoulder access. Additional improvements include street lighting, enhanced transit areas, traffic signal modifications, relocation of utility poles, and storm drainage improvements (if necessary).

The business access and transit lanes, turn restrictions resulting from the raised center median, and sidewalk improvements can be expected to provide improvements and benefits to intersection operations, transit reliability, pedestrian usage, and reducing the angle and driveway type accidents.

This technical memorandum contains the AM and PM peak hour intersection operations analysis for the existing (2005) year and the Build scenario for the year of opening (2010). The operational analyses for both the No Build and Build scenarios in the design (2030) year are also presented. This memorandum also includes a safety analysis, traffic volume forecasting, and the methods and assumptions used to complete the operational analysis.

Project Description

The Aurora Avenue North project is located within the City of Seattle in King County, Washington. Aurora Avenue North is a major north/south urban highway that serves both local and regional traffic within the City of Seattle. Aurora Avenue North, as named within the City of Seattle, is a portion of signed State Route 99 (SR 99) that extends from north Pierce County to north Snohomish County and serves as a regional link between cities within the Puget Sound Region. Within the project limits, Aurora Avenue serves as a major traffic artery for the City of Seattle, with links to I-5 through connections at North 130th Street and North 145th Street.

The City of Seattle, in cooperation with the Washington Department of Transportation (WSDOT) and the Federal Highway Administration (FHWA), proposes to make improvements to Aurora Avenue North between North 110th Street and North 145th Street (approximately 1.6 miles; see Figure 1). The project improvements are described in greater detail below. These improvements are consistent with the Route Development Plan (RDP) (WSDOT 2003) prepared by WSDOT for Aurora Avenue North between the north end of the Battery Street Tunnel and North 145th Street in the City of Seattle, Washington (milepost 32.44 to milepost 40.47). The RDP is a 25-year plan intended to assist WSDOT, the City of Seattle, and King County Metro in making informed decisions on future improvements to the SR 99 corridor.

The RDP listed the following six long-term improvement recommendations for what was referred to as the North Focus Area, from North 110th Street to North 145th Street (see Figure 2):

- Widen existing lanes
- Add a southbound business access and transit (BAT) lane
- Add a raised median with controlled access points
- Construct a continuous amenity zone on both sides of SR 99
- Improve pedestrian crossings
- Driveway consolidation at logical locations

This project has been designed with the intent of fulfilling those recommendations.

Existing Conditions

Physical Characteristics

The study area for this project extends along Aurora Avenue North from N. 110th Street to N. 145th Street within the City of Seattle (see Figure 1). The study area includes eleven (11) study intersections. The unsignalized intersection at N. 127th Street was not chosen to be a study intersection. Seven intersections are currently signalized, while four of them are unsignalized (stop-controlled on the minor street approaches to Aurora Avenue North).

These study intersections are located on Aurora Avenue North at:

- North 112th Street (signalized)
- North 115th Street (signalized)
- North 117th Street (signalized)

- North 125th Street (signalized)
- North 128th Street (unsignalized)
- North 130th Street (signalized)
- North 135th Street (signalized)
- North 137th Street (unsignalized)
- North 140th Street (unsignalized)
- North 143rd Street (unsignalized)
- North 145th Street (signalized)

Within the project limits, Aurora Avenue North is a six-lane roadway. Travel lanes through the study area are typically 10 to 12-feet wide. In the northbound direction, there are two general purpose lanes and business access and transit (BAT) lanes. The northbound BAT lane begins north of N. 112th Street and is restricted to transit vehicles, vehicles accessing business driveways, and right-turning vehicles exiting Aurora Avenue North. In the southbound direction, there are two general purpose lanes only. A center two-way left-turn lane (TWLTL) separates north and southbound traffic and provides full access to businesses and cross streets throughout the length of the project. Additional exclusive left-turn pockets occur at many of the study intersections described below.

Aurora Avenue North currently lacks adequate access management. Freestanding commercial buildings with individual driveways or continuous shoulder access are dominant along the roadway throughout the study area, resulting in a large number of individual access points. Much of the existing business parking along the corridor is directly adjacent to the roadway shoulders and is angled or perpendicular to the street.

Aurora Avenue North is also deficient for non-motorized travel. Numerous driveways, limited curbs and sidewalks, and erratic parking all contribute to a general lack of safe passage for pedestrians, wheelchairs, and bicyclists. Sidewalks are limited on either side of the roadway and generally occur only in front of recently developed establishments. When there are no sidewalks, there is shoulder width available for pedestrians and bus riders.

The roadway speed limit is posted at 35 miles per hour (mph) for the segment of Aurora Avenue North between North 110th Street and North 115th Street. Between North 115th Street and North 145th Street, the posted speed limit increases to 40 mph.

The following paragraphs describe the characteristics of the study intersections along Aurora Avenue North. Figure 3 shows the current lane channelization and intersection control.

Aurora Avenue North and North 112th Street

The Aurora Avenue North and North 112th Street intersection is a 4-leg, 2-phase signalized intersection with permitted left-turn phasing on all approach legs. North 112th Street is the access point to the Washelli Cemetery and intersects Aurora Avenue North at approximately a 90-degree angle on both approaches. The southbound approach consists of an exclusive left-turn pocket (approximately 200 feet long), two through lanes, and a shared through/right-turn lane. The northbound approach consists of an exclusive left-turn pocket (approximately 250 feet long), two through lanes, and a shared through/right-turn lane. The eastbound approach on North 112th Street consists of an exclusive left-turn pocket

(approximately 50 feet long) and a shared through/right-turn lane. The westbound approach on North 112th Street consists of an exclusive left-turn pocket (approximately 65 feet long) and a shared through/right-turn lane. Marked crosswalks are provided on the north, east, and west legs of the intersection.

Aurora Avenue North and North 115th Street

The Aurora Avenue North and North 115th Street intersection is a 3-leg, 3-phase signalized intersection with protected/permitted (flashing yellow) left-turn phasing on southbound Aurora Avenue North. North 115th Street intersects Aurora Avenue North at approximately a 90-degree angle from the east. The southbound approach consists of an exclusive left-turn pocket (approximately 120 feet long) and two through lanes. The northbound approach consists of two through lanes and a BAT lane (exclusive to transit and right-turning vehicles). The westbound approach on North 115th Street consists of a single shared left/right-turn lane. A marked crosswalk is provided on the north leg of the intersection.

Aurora Avenue North and North 117th Street

The Aurora Avenue North and North 117th Street intersection is a 3-leg, 3-phase signalized intersection with protected/permitted (flashing yellow) left-turn phasing on southbound Aurora Avenue North. North 117th Street approaches Aurora Avenue North from the west at a 90-degree angle. The southbound approach consists of an exclusive left-turn pocket (approximately 120 feet long) and two through lanes. The northbound approach consists of two through lanes and a BAT lane (exclusive to transit and right-turning vehicles). The westbound approach on North 117th Street consists of exclusive left (approximately 240 feet long) and right-turn lanes. A marked crosswalk is provided on the north leg of the intersection.

Aurora Avenue North and North 125th Street

The intersection at Aurora Avenue North and North 125th Street is a 4-leg signalized intersection with protected left-turn phasing on all approaches. North 125th Street intersects Aurora Avenue North at a 90-degree angle. The southbound approach consists of an exclusive left-turn pocket (approximately 100 feet long), a through lane and a shared through/right-turn lane. The northbound approach consists of an exclusive left-turn pocket (approximately 140 feet long), two through lanes, and a BAT lane. The cross street approaches on North 125th Street include left-turn pockets (westbound pocket is 150 feet long, eastbound pocket is 120 feet long) and one shared through/right-turn lane. Crosswalks and pedestrian push-buttons are provided on all the intersection legs.

Aurora Avenue North and North 128th Street

At the intersection of Aurora Avenue North and North 128th Street, there are four approaches, which generally meet at 90 degree angles. This intersection is unsignalized. The approaches on North 128th Street are stop-controlled and consist of a single shared lane approach in each direction. Traffic on Aurora Avenue North operates as the free movement. The southbound approach to this intersection consists of a through lane, a shared through/right-turn lane, and an exclusive left-turn pocket (approximately 130 feet long). Similarly, the northbound approach consists of two through lanes, a BAT lane, and an exclusive left-turn pocket (290 feet long). North and southbound left-turning traffic must yield to opposing through traffic. Crosswalks are not provided at this intersection.

Aurora Avenue North and North 130th Street

The Aurora Avenue North and North 130th Street intersection is a 4-leg signalized intersection with protected left-turn phasing on all approaches. The northbound approach includes a left-turn pocket (150 feet long), two through lanes, and a BAT lane. The southbound approach includes a left-turn pocket (320 feet long), a through lane, and a shared through/right-turn lane. The eastbound and westbound approaches each consist of a left-turn pocket (westbound pocket is 190 feet, eastbound pocket is 210 feet long), a through lane, and a shared through/right-turn lane. Crosswalks and pedestrian push-buttons are provided on all legs except across the north leg, where a pedestrian overpass bridge is provided.

Aurora Avenue North and North 135th Street

The intersection at Aurora Avenue North and North 135th Street is a 4-leg, 3-phase signalized intersection. The northbound and southbound left turns have separate pockets (each is 140 feet long) and protected phasing. The remaining northbound approach lanes include two through lanes and a BAT lane, while the southbound approach consists of a through lane and a shared through/right-turn lane. The eastbound approach is a single, shared turn lane. The westbound approach includes a separate left-turn pocket (120 feet long) and one shared through/right lane. Eastbound and westbound traffic share the same phase with permitted left turns. Crosswalks and pedestrian push-buttons are provided on all of the intersection legs.

Aurora Avenue North and North 137th Street

At the unsignalized intersection of Aurora Avenue North and North 137th Street, the northbound and southbound approaches include two through lanes in each direction (with a northbound BAT lane). The north and southbound movements are free and are divided by a center two-way left turn lane that provides storage for left turning vehicles. There are no exclusive turn pockets marked at this intersection. The storage distance northbound is approximately 300 feet, while the storage distance southbound is approximately 660 feet and extends upstream to North 140th Street.

The eastbound and westbound approaches on North 137th Street are stop-controlled and each consists of a single, shared left/through/right-turn lane. Crosswalks are not provided at this intersection.

Aurora Avenue North and North 140th Street

The Aurora Avenue North and North 140th Street intersection is a 3-leg, unsignalized intersection. North 140th Street intersects Aurora Avenue North at approximately a 90-degree angle from the east. This westbound approach consists of a single, stop-controlled, shared left/through/right-turn lane. The southbound approach consists of two through lanes and the northbound approach consists of two through lanes and a BAT lane (exclusive to transit and right-turning vehicles). The northbound and southbound movements are free and divided by a center two-way left-turn lane. This center lane provides separated storage length for left-turning vehicles, which must yield to oncoming traffic. There are no exclusive turn pockets marked at this intersection. A marked crosswalk is provided on the south side of the intersection.

Aurora Avenue North and North 143rd Street

The intersection at Aurora Avenue North and North 143rd Street is a 4-leg unsignalized intersection. Through movements are free along Aurora Avenue North, which includes two through lanes in the southbound direction and two through lanes and a BAT lane in the northbound direction. The directions are separated by a center two-way left turn lane, which provides storage for north and southbound left-turning vehicles. The cross street approaches on North 143rd Street are stop-controlled and each include one shared left/through/right-turn lane. Crosswalks are not provided at this intersection.

Aurora Avenue North and North 145th Street

At the intersection of Aurora Avenue North and North 145th Street, the northbound and southbound approaches include two through lanes in each direction (with an additional BAT lane northbound). The north and southbound directions also include left-turn storage pockets, each of which is approximately 250 feet long. The eastbound approach on North 145th Street includes a through lane, a shared through/right-turn lane, and an exclusive left-turn pocket approximately 120 feet long. The westbound approach also includes two through lanes and exclusive left-turn (approximately 165 feet long) and right-turn (approximately 300 feet long) pockets. This intersection is controlled by a 4-phase signal, which provides protected left-turn phases. Crosswalks and pedestrian push-buttons are provided on all of the intersection legs.

Traffic Volumes

Within the study area, average daily traffic volumes along Aurora Avenue North vary between 35,000 vehicles per day (vpd) and 39,000 vpd. Daily traffic volumes are evenly split between northbound and southbound travel.

Morning and afternoon peak period traffic counts were conducted at study intersections in March and June of 2005 by the City of Seattle. The 2-hour counts occurred between 7 AM and 9 AM in the morning and 4 PM and 6 PM in the afternoon. The traffic counts showed that northbound travel is the dominant movement in the afternoon peak hour while southbound travel is heaviest in the morning. The AM peak traffic volumes in the study area are approximately 75 percent of the PM peak traffic volumes.

The 2005 peak period traffic counts had large volume differences between adjacent study intersections that could not be fully explained by business driveway activity. Historical traffic counts from 2002 and 2003 were used as part of the volume balancing effort to reduce these volume differences. Figure 4 provides a summary of the adjusted existing AM and PM peak hour study intersection turning movement volumes used in the intersection operational analysis.

Pedestrian Volumes

Pedestrian volumes at intersection crosswalks were also collected with the traffic counts in March and June of 2005. These counts showed pedestrian activity as high as 59 crossings per intersection during the morning peak hour and 125 per intersection during the afternoon peak hour. The lowest pedestrian counts were collected at the south end of the study area near N. 117th Street and the highest at N. 135th Street and N. 145th Street. See Appendix A for the original traffic count data collected in the study area.

Transit Service

Transit service is provided in the study area by King County Metro. Route number 358 serves Aurora Avenue North in both directions, with many transit stops between North 110th Street and North 145th Street. Route number 345 provides service on North 130th Street, which crosses Aurora Avenue North at a major transfer point. Similarly, route number 304 provides east/west service across Aurora Avenue North along North 145th Street. Table 1 shows the King County Metro route number, description, service days, service times and directions, and typical headways of each route.

TABLE 1
King County Metro Routes within Study Area

No.	Route Description	Service Days	Service Times ¹ (Direction)	Typical Headways
358	Downtown Seattle to Aurora Village	Weekdays	4:25 AM to 1:00 AM (to Seattle)	6 to 7 minutes (between 6:30 AM and 8:00 AM to Downtown Seattle, 4:30 PM and 6:00 PM to Aurora Village)
			5:35 AM to 2:00 AM (to Aurora Village)	15 minutes (all other times of day)
		Weekends	5:05 AM to 1:00 AM (to Seattle) 6:10 AM to 2:00 AM (to Aurora Village)	15 to 20 minutes 30 minutes (after 7:00 PM)
345	Northgate to Shoreline Community College	Weekdays	6:00 AM to 11:00 PM (to Northgate)	30 minutes
			6:20 AM to 12:00 AM (to Shoreline CC)	
		Weekends	6:30 AM to 10:00 PM (to Northgate)	30 minutes (Saturdays) 60 minutes (Sundays)
			6:30 AM to 10:30 PM (to Shoreline CC)	
304	Downtown Seattle to Richmond Beach	Weekdays	6:10 AM to 8:25 AM (to Seattle)	20 minutes (AM to Seattle) 30 minutes (PM to Richmond Beach)
			3:35 PM to 6:40 PM (to Richmond Beach)	

¹ Service times are approximate.

Source: <http://transit.metrokc.gov>

There are no Park-and-Ride lots located in the vicinity of the project area. Sound Transit does not provide any transit service (ST Express) to the area. Transit zones (bus stops) are not well defined, are often marked by a single pole-mounted sign, and lack safe access for people with disabilities. The absence of safe, continuous pedestrian facilities dissuades many potential transit patrons from using the bus system.

Current Ridership

Ridership data was collected for Metro routes 304, 345, and 358. The average weekday (Monday - Friday) and weekend (Saturday, Sunday) boardings and deboardings at stops within the study area are summarized in Table 2. Ridership data is provided in Appendix B.

TABLE 2
King County Metro Ridership Data
February to June 2006

Bus Route	Direction	Average Daily Boardings	Average Daily Deboardings	Average Daily Total
Weekdays				
358 ¹	Northbound	345	894	1,239
	Southbound	936	372	1,308
345 ²	Eastbound	39	25	64
	Westbound	30	41	71
304 ³	Eastbound	4	0	4
	Westbound	0	5	5
Weekends				
358 ¹	Northbound	193	456	649
	Southbound	673	312	985
345 ²	Eastbound	20	10	30
	Westbound	18	42	60

1 – Stops providing data located along Aurora Avenue N. near the Washelli Cemetery Entrance, N. 115th Street, N. 125th Street, N. 130th Street, N. 135th Street, and N. 145th Street intersections.

2 – Stops providing data located near the intersection of Aurora Avenue N. and N. 130th Street.

3 – Stops providing data located near the intersection of Aurora Avenue N. and N. 145th Street.

Source: Seattle Metro APC System.

Table 2 shows that average daily riders in the study area total approximately 2,700 on weekdays and approximately 1,700 on weekend days.

Accident History

The most current accident data was provided by WSDOT for the period from January 1, 2002 to December 31, 2004. The following discussion will reveal the accident rates and the important patterns that emerged from the analysis. The accident data is categorized by intersection and roadway segment.

A total of 544 accidents were reported for the 3-year period along the study section of Aurora Avenue North. Of the total, 277 resulted in property damage only, 265 accidents resulted in an injury, and 2 fatal crashes were reported.

The predominant accident type along Aurora Avenue North in the past three years has been rear-end accidents (34.9%). The rear-end accident is the most common type in a congested corridor with stop-and-go conditions and long queues. The next most frequent accident type was entering driveway (19.1%), common for a corridor with unmanaged access and numerous business driveways. Combining the entering driveway (19.1%), angle (15.1%),

entering at angle (8.1%), and leaving driveway (6.1%) accidents gives a total of 48.4 percent angle-type accidents in the study area. Table 3 summarizes the type and frequency of the accident.

TABLE 3

Aurora Avenue North Accident Type Summary (January 1, 2002 to December 31, 2004)
N. 110th Street to N. 145th Street

Accident Type	Number of Accidents	Percentage
Rear-end	190	34.9%
Entering driveway	104	19.1%
Angle	82	15.1%
Entering at angle	44	8.1%
Sideswipe, same direction	37	6.8%
Leaving driveway	33	6.1%
Pedestrian	16	2.9%
Object	15	2.7%
Other	12	2.2%
Parked	7	1.3%
Bicycle	2	0.4%
Sideswipe, opposite direction	2	0.4%
Total	544	100%

Sources: WSDOT Collision Data Office.

A trend not captured by Table 3 is the number of accidents occurring in the left-turn lane or median and those involving at least one vehicle making a left-turn movement at an unsignalized location. These are also accidents common for a corridor with unmanaged access. In the three-year period, there were 177 (32%) accidents that involved one of the vehicles in the crash turning left or the location of the impact being in the left-turn lane or TWLTL median at an unsignalized location. This reveals that nearly one-third of the accidents could be prevented by implementing the turn restrictions with the raised median.

During the three-year period along the study section an average of 181 accidents occurred per year. The greatest number of accidents, 190, occurred in 2004. The fewest number of accidents, 174, occurred in 2002. There were at least 89 and no greater than 95 accidents that resulted in property damage only and between 85 and 95 accidents that resulted in injury each of the three years. Two fatal crashes occurred in the three-year study, both in 2004, and alcohol was not involved in either crash. One fatal crash occurred at the N. 115th Street intersection, where a pedestrian (crossing against the signal) was struck and killed by a vehicle traveling in the southbound direction. The second fatal crash occurred at the N. 128th Street intersection, where a southbound motorcycle (exceeding the speed limit) struck a northbound vehicle turning left. Table 4 summarizes the yearly accidents.

TABLE 4

Aurora Avenue North Accident Yearly Summary (January 1, 2002 to December 31, 2004)
N. 110th Street to N. 145th Street

Year	Total Accidents	PDO	Injury	Fatality	Under Influence of Alcohol or Drugs
2002	174	89	85	0	2
2003	180	95	85	0	6
2004	190	93	95	2	7
Total	544	277	265	2	15

Sources: WSDOT Collision Data Office.

During the three-year study period, 393 of the 544 accidents occurred during daylight hours. One-hundred and twelve accidents occurred during dark hours with street lights on. This accounts for 93 percent of all accidents along Aurora Avenue North. The lighting conditions of 11 accidents were unknown.

The surface condition during accidents was dry during 388 of the 544, or 71.3 percent. Wet surface conditions accounted for 145 of the 544, or 26.6 percent. Snow/Slush or ice accounted for only three total accidents. The surface conditions of seven accidents were unknown. Table 5 summarizes the lighting and surface conditions during the 544 accidents.

TABLE 5

Aurora Avenue North Accident Conditions Summary (January 1, 2002 to December 31, 2004)
N. 110th Street to N. 145th Street

Lighting Condition	Surface Condition						Total
	Wet	Dry	Oil	Snow/Slush	Ice	Unknown	
Dark – Street Lights On	50	60	0	1	0	1	112
Dark – Street Lights Off	1	1	0	0	0	0	2
Dawn	5	0	0	0	0	0	5
Daylight	78	312	1	1	0	1	393
Dusk	10	10	0	0	1	0	21
Unknown	1	5	0	0	0	5	11
Total	145	388	1	2	1	7	544

Sources: WSDOT Collision Data Office.

Accident Rates

Roadway segment accident rates, expressed in “accidents per million vehicle-miles traveled,” are used to compare the accident experience of one roadway segment to another. Intersection accident rates, expressed in “accidents per million entering vehicles,” are used to compare the accident experience of one intersection to another. These rates allow a comparison to state and national rates for similar roads. The City of Seattle prioritizes high accident intersections using the number of crashes occurring per year. The threshold for signalized intersections is 10 accidents per year and the threshold for unsignalized intersections is 5 accidents per year.

The study section of Aurora Avenue North was divided into segments between study intersections in order to quantify the accident rate. The accident rate was computed for each intersection and segment based on reported accidents between 2002 and 2004, as shown in Table 6.

TABLE 6
Intersection and Segment Accident Rates (January 1, 2002 to December 31, 2004)

Description	Length (miles)	ADT (vpd)	Number of Accidents				Average Annual Accident Rate ¹
			PDO	Injury	Fatal	Total	
Aurora Avenue North Intersections							
N. 112 th Street	0.05	30,200	4	1	0	5	0.15
N. 115 th Street	0.05	31,800	14	13	1	28	0.80
N. 117 th Street	0.05	33,600	6	13	0	19	0.52
N. 125 th Street	0.05	39,600	20	22	0	42	0.97
N. 128 th Street	0.05	31,450	22	23	1	46	1.34
N. 130 th Street	0.05	43,450	20	18	0	38	0.80
N. 135 th Street	0.05	33,950	11	13	0	24	0.65
N. 137 th Street	0.05	31,950	6	6	0	12	0.34
N. 140 th Street	0.05	31,450	5	13	0	18	0.52
N. 143 rd Street	0.05	31,200	27	19	0	46	1.35
N. 145 th Street	0.02	45,200	32	16	0	48	0.97
Aurora Avenue North Segments							
N. 110 th Street to N. 112 th Street	0.09	38,130	3	1	0	4	0.10
N. 112 th Street to N. 115 th Street	0.11	38,130	3	6	0	9	0.22
N. 115 th Street to N. 117 th Street	0.12	38,100	8	4	0	12	0.29
N. 117 th Street to N. 125 th Street	0.27	38,100	22	28	0	50	1.20
N. 125 th Street to N. 128 th Street	0.15	38,190	25	30	0	55	1.32
N. 130 th Street to N. 135 th Street	0.23	38,790	23	15	0	38	0.89
N. 135 th Street to N. 137 th Street	0.05	38,710	6	2	0	8	0.19
N. 137 th Street to N. 140 th Street	0.08	38,710	3	3	0	6	0.14
N. 140 th Street to N. 143 rd Street	0.07	38,710	6	5	0	11	0.26
N. 143 rd Street to N. 145 th Street	0.08	38,710	11	14	0	25	0.59
Totals for Aurora Avenue North	1.77	38,400	277	265	2	544	7.31

Notes:

Segments less than one-mile in length are considered as a one-mile segment to compute the accident rate.

¹ Units for intersection accident rates are accidents per million entering vehicles. Units for roadway segment accident rates are accidents per million vehicle-miles.

The study intersections along Aurora Avenue North had approximately 60 percent (326 of 544) of all accidents in the study area. These accidents occurred within 100 feet of a controlled intersection and the highest number of accidents (48 of 280) occurred at N. 145th Street. Intersection accident rates ranged from 0.15 accidents per million entering vehicles at N. 112th Street to 1.35 accidents per million entering vehicles at N. 143rd Street. The signalized intersections that had 10 or more accidents in a year were N. 115th Street (2002

and 2004), N. 125th Street (2002, 2003, and 2004), N. 130th Street (2003 and 2004), N. 135th Street (2004), and N. 145th Street (2002, 2003, and 2004). The unsignalized intersections that had 5 or more accidents in a year were N. 128th Street (2002, 2003, and 2004), N. 137th Street (2003), N. 140th Street (2002, 2003, and 2004), and N. 143rd Street (2002, 2003, and 2004). The unsignalized intersections at N. 128th Street and N. 143rd Street have the second highest three-year accident totals and two of the lowest traffic volumes among all intersections. Together they had approximately 17 percent of all accidents in the study area over the last 3 years. Congestion and nearby business access contributed to the types of crashes experienced at these two intersections.

The segments along Aurora Avenue North between study intersections had approximately 40 percent (218 of 544) of all accidents in the study area. The section of Aurora Avenue North, between N. 125th Street and N. 128th Street, had the highest incidence of accidents in the last three years when compared to the entire length. A contributing factor to this total is the unsignalized intersection at N. 127th Street that was not considered a study intersection. Roadway segment accident rates ranged from 0.10 accidents per million vehicle-miles between N. 110th Street and N. 112th Street to 1.32 accidents per million vehicle-miles between N. 125th Street and N. 128th Street. Statewide accident data from 2003 (latest information available) indicates an overall average accident rate of 2.41 accidents per million vehicle-miles for statewide urban principal arterials. Individual segment accident rates are much less than the statewide average, but the accident rate for the study area (7.31 accidents per million vehicle-miles) is much greater than the statewide average because it includes intersection-related accidents.

The WSDOT Collision Data Office recognized two locations in the study area as High Accident Locations (HALs) for the 2004-2006 Biennium listing. The two HALs were from south of N. 125th Street to south of N. 135th Street and from N. 135th Street to N. 145th Street. This is consistent with the intersection and segment accident rates summarized above.

Intersection Operational Analysis

Methods and Assumptions

A Synchro traffic operations model from the Route Development Plan¹ was modified for the study area based on traffic counts and field observations. The model includes traffic volume parameters, such as peak hour factors, truck percentages, pedestrians, and bicyclists that were derived from the hourly turning movement counts.

Synchro software uses methodology defined in the 2000 Highway Capacity Manual (HCM 2000) to analyze both signalized and stop-controlled intersections. The model computes the level-of-service, delay, and queue to quantify traffic operations at the study intersections and determine whether the intersections meet the level-of-service goal set in the Methods and Assumptions technical memorandum (see Appendix C).

Refer to Appendix C (Methods and Assumption technical memorandum) for the assumptions and data inputs used in the Synchro model.

Based on existing turn movement counts, forecasted traffic volumes, and the assumptions presented above, an operational analysis was prepared for the existing year (2005), year of opening (2010), and design year (2030). The operational analysis evaluated intersection LOS, intersection delay, and 95th percentile queue lengths. To uphold the LOS goal, LOS E must be maintained for the Build analysis.

Intersection Level-of-Service

The Synchro software program, which incorporates the 2000 Highway Capacity Manual (HCM) methodologies, was used to estimate level-of-service (LOS), a qualitative description of traffic flow characteristics. The highest level (LOS A) describes free-flow conditions in which vehicles experience minimal delay. The lowest level (LOS F) describes stop-and-go conditions in which long delays are experienced by most vehicles in the traffic stream.

The LOS for stop-controlled intersections is defined by the control delay at the minor stop-controlled approach. Control delay is defined as the total elapsed time from when a vehicle stops at the end of the queue until the vehicle departs from the stop line; this time includes the time required for the vehicle to travel from the last-in-queue position to the first-in-queue position.

LOS defines the overall operations at a signalized intersection based on average control delay. Control delay is a complex measure and is dependent on a number of variables, including the quality of progression, the cycle length, the deceleration and acceleration delay, the stopped delay, and the amount of green time available to a street. Table 7 describes the LOS and delay parameters.

¹ Washington State Department of Transportation, Northwest Region, Planning and Policy Office. [Route Development Plan, State Route 99/Aurora Avenue North, From the North End of the Battery Street Tunnel \(MP 32.44\) to N. 145th Street \(MP 40.47\)](#). March 2003.

TABLE 7
 HCM LOS and Delay Parameters
Unsignalized and Signalized Intersections

LOS	Delay ¹	
	Unsignalized Intersections	Signalized Intersections
A	≤ 10	≤ 10
B	> 10 and ≤ 15	> 10 and ≤ 20
C	> 15 and ≤ 25	> 20 and ≤ 35
D	> 25 and ≤ 35	> 35 and ≤ 55
E	> 35 and ≤ 50	> 55 and ≤ 80
F	>50	>80

¹ Delay is measured in units of average seconds per vehicle.

95th Percentile Queue

The 95th percentile queue length is the accepted measurement in the transportation industry for determining the necessary storage length at signalized intersections. This term is made up of two concepts that can be explained separately. First, the queue length refers to the distance from the front bumper of the first stopped vehicle to the rear bumper of the last stopped vehicle. And second, the 95th percentile refers to the amount of time out of the peak hour of travel that the line of cars will be that distance or less. In other words, the line of cars will be less than the distance indicated 95 percent of the time. It is possible that the line of cars will be longer, but only 5 percent of the time. Designing to the 95th percentile queue length will minimize the occurrence of vehicles extending beyond the turn lane and blocking through lanes, possibly into upstream intersections.

Existing Conditions and Deficiencies

The signalized intersections on Aurora Avenue North and the stop-controlled streets intersecting it currently operate at LOS E or better during both AM and PM peak hours, with three exceptions. The stop-controlled westbound approaches at N. 137th Street, N. 140th Street, and N. 143rd Street all operate at LOS F during the PM peak hour. The turning movement volumes at these approaches are small, but the conflicting volume along Aurora Avenue North is so high that few gaps exist. This effectively reduces the capacity of the movement. Table 8 summarizes the existing peak hour levels-of-service at study intersections along Aurora Avenue North.

TABLE 8
Existing (2005) Intersection LOS Results

Intersection	AM Peak Hour		PM Peak Hour	
	LOS	Delay ²	LOS	Delay ²
Aurora Avenue North & N. 112 th Street	A	3	A	4
Aurora Avenue North & N. 115 th Street	A	9	B	13
Aurora Avenue North & N. 117 th Street	A	5	B	16
Aurora Avenue North & N. 125 th Street	C	34	D	55
Aurora Avenue North & N. 128 th Street ¹	E	37	C	19
Aurora Avenue North & N. 130 th Street	E	67	E	76
Aurora Avenue North & N. 135 th Street	B	13	B	19
Aurora Avenue North & N. 137 th Street ¹	D	33	F	>150
Aurora Avenue North & N. 140 th Street ¹	C	17	F	69
Aurora Avenue North & N. 143 rd Street ¹	D	34	F	77
Aurora Avenue North & N. 145 th Street	D	49	E	69

Bold text indicates operations exceed goal of LOS E.

¹ Unsignalized intersection. Reported delay is for the highest minor street approach delay.

² Delay is reported in units of average seconds per vehicle.

While many intersections may meet the LOS goal for acceptable operations, there are areas of excessive queuing that exceed the available storage length of turn lanes or extend into an upstream study intersection. These queues block other vehicles and prohibit the progression of traffic along Aurora Avenue North, effectively reducing the mobility of the corridor. These areas of congestion and blocking begin between the signalized intersections at N. 125th Street and N. 130th Street and propagate north to the study area limit at N. 145th Street. Table 9 shows the current 95th percentile queue lengths that exceed the available storage.

TABLE 9
Existing (2005) AM and PM Peak Hour 95th Percentile Queue Lengths¹

Aurora Avenue North Intersection	Available Storage Length (ft)	AM 95th Percentile Queue (ft)	PM 95th Percentile Queue (ft)
N. 125th Street			
Eastbound Left	120 ²	N/A	190
Northbound Left	140 ²	N/A	200
N. 130th Street			
Eastbound Left	210	N/A	310
Westbound Left	190	310	300
Northbound Through (each lane)	330	N/A	950
N. 135th Street			
Southbound Through (each lane)	660	700	N/A
N. 145th Street			
Eastbound Left	120	N/A	240
Westbound Left	170 ²	380	260
Northbound Through (each lane)	670	N/A	910
Southbound Left	250 ²	N/A	310

¹ Queue lengths reported are those that exceed the available storage.

² Storage lengths are based on striping limits, but turn pocket is preceded by a center TWLTL.

N/A: 95th percentile queue did not exceed available storage for that peak hour.

Storage and queue lengths rounded up to the nearest 10 feet.

The signalized intersections from N. 125th Street to N. 145th Street currently have 95th percentile queue lengths that exceed the available storage. This mainly occurs during the PM peak hour except at N. 130th Street, N. 135th Street, and N. 145th Street, which have excessive queuing during the AM peak hour. During the AM peak hour, vehicles in the southbound through lanes at N. 135th Street extend past N. 137th Street. During the PM peak hour, vehicles in the northbound through lanes at N. 130th Street extend past N. 128th Street and vehicles in the northbound through lanes at N. 145 Street extend past N. 143rd Street. The northbound and southbound storage problems are consistent with the corridor’s peak direction of travel.

Forecasted Traffic Volume Growth Trends

The Puget Sound Regional Council’s (PSRC) 2030 travel demand model was surveyed to determine the expected growth in traffic volumes along Aurora Avenue North. At the coordination meeting on July 26, 2005, CH2M HILL suggested an AM peak hour growth rate of 0.85 percent per year and a PM peak hour growth rate of 1.23 percent per year as an alternative to the 1.21 percent per year growth rate for both peak periods. All three growth rates were derived from the PSRC’s travel demand model (computed assuming annual compound growth) and the City agreed that separate growth rates for each peak period were acceptable.

The AM and PM peak hour traffic volume growth rates were applied to the 2005 existing intersection turning movement volumes to derive year 2010 Build, 2030 No-Build and 2030 Build condition traffic volume forecasts.

Figure 5 shows the year of opening 2010 Build AM and PM peak hour traffic volumes forecasted for the intersection operational analysis. Figure 6 shows the design year 2030 No-Build AM and PM peak hour traffic volumes forecasted for the intersection operational analysis. Figure 7 shows the design year 2030 Build AM and PM peak hour traffic volumes forecasted for the intersection operational analysis.

Year of Opening (2010)

Future Build Conditions

Future traffic conditions were analyzed for the Build condition in the year of opening (2010) and the design year (2030). The Build condition lane channelization and intersection control were analyzed according to the channelization proposed in the Route Development Plan (see Figure 8). The improvements include the following:

- Extending the northbound BAT lane south to the north side of N. 110th Street.
- Widening Aurora Avenue North to provide a southbound BAT lane from north of N. 110th Street to south of N. 145th Street.
- Replacing the center TWLTL with a raised, landscaped center median that narrows at intersections and select mid-block locations to provide left-turn lanes.
- Restricting turns from N. 127th Street, N. 128th Street, N. 137th Street, N. 140th Street, and N. 143rd Street to right-out only.
- Prohibiting left-turns into N. 128th Street and N. 143rd Street (southbound only).
- Provide for and allow U-turns (passenger cars only) and left-turns (passenger cars and small delivery trucks) at all mid-block and signalized left-turn lanes.

Additional improvements were assumed to be in place (by 2010) north of N. 145th Street. These improvements (within the City of Shoreline) include widening Aurora Avenue North to provide a southbound BAT lane and a second southbound left-turn lane.

The improvements described above were assumed to be constructed by 2010. Forecasted traffic volumes for both peak hours were used to analyze the study intersections. The average annual growth rates used were 0.85 percent for the AM peak hour and 1.23 percent for the PM peak hour. Forecasted traffic volumes for both peak hours were used to analyze the study intersections. Figure 5 shows the year of opening (2010) Build AM and PM peak hour traffic volumes forecasted for the intersection operational analysis.

Table 10 summarizes the 2010 Build peak hour levels-of-service along Aurora Avenue North.

TABLE 10
Future Build (2010) Intersection LOS Results

Intersection	AM Peak Hour		PM Peak Hour	
	LOS	Delay ²	LOS	Delay ²
Aurora Avenue North & N. 112 th Street	A	4	A	7
Aurora Avenue North & N. 115 th Street	B	13	B	17
Aurora Avenue North & N. 117 th Street	A	8	B	15
Aurora Avenue North & N. 125 th Street	C	25	D	46
Aurora Avenue North & N. 128 th Street ¹	B	13	B	14
Aurora Avenue North & N. 130 th Street	D	47	E	67
Aurora Avenue North & N. 135 th Street	A	8	B	14
Aurora Avenue North & N. 137 th Street ¹	C	21	C	17
Aurora Avenue North & N. 140 th Street ¹	B	11	D	28
Aurora Avenue North & N. 143 rd Street ¹	B	13	C	25
Aurora Avenue North & N. 145 th Street	D	52	D	52

¹ Unsignalized intersection. Reported delay is for the highest minor street approach delay.

² Delay is reported in units of average seconds per vehicle.

Under the Build scenario, all the signalized intersections and stop-controlled approaches intersecting Aurora Avenue North are forecasted to operate at LOS E or better during both peak hours. Each of the stop-controlled approaches restricts the through and left-turn maneuvers that require the largest gaps and, therefore, experience the most delay. Right-turning vehicles require smaller gaps that allow them to enter the traffic stream more easily.

The recommended storage lengths were incorporated into the design to accommodate the 95th percentile queue lengths. In some cases this was not possible due to limitations of widening the side street approaches for additional turn lanes. This caused more of the cycle length to be used by the side street approaches and resulted in remaining areas of excessive queuing that exceed the available storage length of turn lanes or extend to an upstream study intersection. These queues block other vehicles and prohibit the progression of traffic along Aurora Avenue North. Table 11 shows the predicted 95th percentile queue lengths that will exceed the recommended storage.

TABLE 11
2010 Build AM and PM Peak Hour 95th Percentile Queue Lengths¹

Aurora Avenue North Intersection	Recommended Storage Lengths (ft)	AM 95th Percentile Queue (ft)	PM 95th Percentile Queue (ft)
N. 125th Street			
Eastbound Left	250	N/A	340
N. 130th Street			
Eastbound Left	320	N/A	380
Westbound Left	380	410	450
Northbound Through (each lane)	330	N/A	1,030
Southbound Left	390	N/A	460
N. 135th Street			
Westbound Left	120	N/A	140
N. 145th Street			
Eastbound Left	120	150	380
Westbound Left	300	500	410
Northbound Through (each lane)	670	N/A	990

¹ Queue lengths reported are those that exceed the recommended storage.

N/A: 95th percentile queue did not exceed recommended storage for that peak hour.

Storage and queue lengths rounded up to the nearest 10 feet.

The signalized intersections from N. 125th Street to N. 145th Street are predicted to have at least one approach with 95th percentile queue lengths that exceed the available storage. This primarily occurs during the PM peak hour except at N. 130th Street and N. 145th Street, which have excessive queuing in the side street left-turn pockets during the AM peak hour. During the PM peak hour, vehicles in the northbound through lanes at N. 130th Street and N. 145th Street will extend past the upstream intersection and block the progression of traffic.

Design Year (2030)

Future No-Build Conditions

Future traffic conditions were analyzed for the design year (2030) No-Build condition. Future traffic conditions were not analyzed for the year of opening (2010) No-Build condition according to Table 1 of the Methods and Assumptions technical memorandum (see Appendix C). The No-Build condition lane channelization and intersection control were assumed to remain the same as currently exists because no other improvement projects are currently planned. Optimization of signal timing was performed for the signalized intersections as a coordinated system. Figure 3 provides the current intersection lane channelization and control.

Forecasted traffic volumes for both peak hours were used to analyze the study intersections. The average annual growth rates used were 0.85 percent for the AM peak hour and 1.23 percent for the PM peak hour. Figure 6 shows the design year (2030) No-Build AM and PM peak hour traffic volumes forecasted for the intersection operational analysis.

Table 12 summarizes the 2030 No-Build peak hour levels-of-service along Aurora Avenue North and at the stop-controlled intersecting streets.

TABLE 12
Future No-Build (2030) Intersection LOS Results

Intersection	AM Peak Hour		PM Peak Hour	
	LOS	Delay ²	LOS	Delay ²
Aurora Avenue North & N. 112 th Street	A	5	A	4
Aurora Avenue North & N. 115 th Street	A	7	C	32
Aurora Avenue North & N. 117 th Street	A	6	C	35
Aurora Avenue North & N. 125 th Street	D	40	F	84
Aurora Avenue North & N. 128 th Street ¹	F	>150	F	>150
Aurora Avenue North & N. 130 th Street	E	68	F	144
Aurora Avenue North & N. 135 th Street	A	7	D	52
Aurora Avenue North & N. 137 th Street ¹	F	78	F	>150
Aurora Avenue North & N. 140 th Street ¹	C	20	F	>150
Aurora Avenue North & N. 143 rd Street ¹	F	>150	F	>150
Aurora Avenue North & N. 145 th Street	E	72	F	122

Bold text indicates operations exceed goal of LOS E.

¹ Unsignalized intersection. Reported delay is for the highest minor street approach delay.

² Delay is reported in units of average seconds per vehicle.

Under the No-Build scenario, all the stop-controlled approaches intersecting Aurora Avenue North are forecasted to operate at LOS F during both peak hours, except during the AM peak hour at N. 140th Street. This would occur because north and southbound traffic are expected to leave minimal gaps for side-street traffic to make a turn.

The signalized intersections between N. 112th Street and N. 117th Street are forecasted to operate at LOS C or better during both peak hours. Beginning with N. 125th Street, the signalized intersections to the north are forecasted to operate at LOS E or F, with few exceptions. The intersection at N. 135th Street shows LOS D or better during both peak hours, but it is unlikely that the signal would operate this well with queuing and blocking from adjacent signalized intersections.

Table 13 shows the predicted 95th percentile queue lengths that will exceed the available storage.

TABLE 13
Future No-Build (2030) AM and PM Peak Hour 95th Percentile Queue Lengths¹

Aurora Avenue North Intersection	Available Storage Lengths (ft)	AM 95th Percentile Queue (ft)	PM 95th Percentile Queue (ft)
N. 112th Street			
Eastbound Left	50	N/A	70
N. 115th Street			
Northbound Through (each lane)	820	N/A	1,450
Southbound Left	120 ²	N/A	210
N. 117th Street			
Westbound Left	240	N/A	290
Northbound Through (each lane)	890	N/A	1,580
Southbound Left	120 ²	N/A	150
N. 125th Street			
Eastbound Left	120 ²	200	430
Westbound Left	150	180	180
Northbound Left	140 ²	180	260
N. 130th Street			
Eastbound Left	210	N/A	510
Westbound Left	190	490	580
Westbound Through (each lane)	660	N/A	770
Northbound Left	150 ²	160	N/A
Northbound Through (each lane)	330	N/A	1,560
Southbound Left	320 ²	N/A	560
N. 135th Street			
Westbound Left	120 ²	N/A	200
Southbound Through	660	N/A	700
N. 137th Street			
Eastbound Left/Thru/Right	120	N/A	Error
N. 145th Street			
Eastbound Left	120	180	510
Westbound Left	170 ²	620	580
Westbound Right	300	N/A	370
Northbound Through (each lane)	660	N/A	1,380
Southbound Left	250 ²	410	690
Southbound Through (each lane)	990	1,100	N/A

¹ Queue lengths reported are those that exceed the available storage.

² Storage lengths are based on striping limits, but turn pocket is preceded by a center TWLTL.

N/A: 95th percentile queue did not exceed available storage for that peak hour.

Error: Queuing exceeds limits of equation. No distance given.

Storage and queue lengths rounded up to the nearest 10 feet.

During the AM peak hour, excessive queuing is expected at N. 125th Street, N. 130th Street, and N. 145th Street. Although the analysis does not show it, excessive southbound queues could still be expected at N. 135th Street during the AM peak hour. The 95th percentile

queue lengths are reduced by the metering effect of upstream intersections. During the PM peak hour, all but three study intersections (N. 128th Street, N. 140th Street, and N. 143rd Street) are predicted to have at least one approach with an excessive queue length. PM peak hour vehicles in the northbound through lanes at N. 115th Street, N. 117th Street, N. 130th Street, and N. 145th Street will block the upstream study intersection. This will also have a metering effect at adjacent study intersections, such as N. 125th Street and N. 135th Street. At the same time southbound queuing at N. 135th Street will block the upstream intersection at N. 137th Street.

Future Build Conditions

Future traffic conditions were analyzed for the Build condition in the year of opening (2010) and the design year (2030). The Build condition lane channelization and intersection control were analyzed according to the channelization proposed in the Route Development Plan (see Figure 8). The improvements include the following:

- Extending the northbound BAT lane south to the north side of N. 110th Street.
- Widening Aurora Avenue North to provide a southbound BAT lane from north of N. 110th Street to south of N. 145th Street.
- Replacing the center TWLTL with a raised, landscaped center median that narrows at intersections and select mid-block locations to provide left-turn lanes.
- Restricting turns from N. 127th Street, N. 128th Street, N. 137th Street, N. 140th Street, and N. 143rd Street to right-out only.
- Prohibiting left-turns into N. 128th Street and N. 143rd Street (southbound only).
- Provide for and allow U-turns (passenger cars only) and left-turns (passenger cars and small delivery trucks) at all mid-block and signalized left-turn lanes.

Additional improvements were assumed to be in place (by 2010) north of N. 145th Street. These improvements (within the City of Shoreline) include widening Aurora Avenue North to provide a southbound BAT lane and a second southbound left-turn lane.

Design Year (2030)

Future traffic conditions were analyzed for the design year (2030). Forecasted traffic volumes for both peak hours were used to analyze the study intersections. The average annual growth rates used were 0.85 percent for the AM peak hour and 1.23 percent for the PM peak hour. Figure 7 shows the design year (2030) Build AM and PM peak hour traffic volumes forecasted for the intersection operational analysis.

Table 14 summarizes the 2030 Build peak hour levels-of-service along Aurora Avenue North and provides the 2030 No-Build results from Table 12 for comparison.

TABLE 14
Future Design Year (2030) No-Build and Build Intersection LOS Results

Intersection	2030 No-Build				2030 Build			
	AM Peak Hour		PM Peak Hour		AM Peak Hour		PM Peak Hour	
	LOS	Delay ²	LOS	Delay ²	LOS	Delay ²	LOS	Delay ²
Aurora Avenue North & N. 112 th Street	A	5	A	4	A	4	A	8
Aurora Avenue North & N. 115 th Street	A	7	C	32	B	13	C	30
Aurora Avenue North & N. 117 th Street	A	6	C	35	A	10	E	56
Aurora Avenue North & N. 125 th Street	D	40	F	84	D	36	F	86
Aurora Avenue North & N. 128 th Street ¹	F	>150	F	>150	B	15	C	21
Aurora Avenue North & N. 130 th Street	E	68	F	144	E	68	F	134
Aurora Avenue North & N. 135 th Street	A	7	D	52	A	10	D	43
Aurora Avenue North & N. 137 th Street ¹	F	78	F	>150	D	26	C	20
Aurora Avenue North & N. 140 th Street ¹	C	20	F	>150	B	12	E	43
Aurora Avenue North & N. 143 rd Street ¹	F	>150	F	>150	B	15	E	40
Aurora Avenue North & N. 145 th Street	E	72	F	122	E	74	F	95

Bold text indicates operations exceed goal of LOS E.

¹ Unsignalized intersection. Reported delay is for the highest minor street approach delay.

² Delay is reported in units of average seconds per vehicle.

Under the Build scenario, all of the stop-controlled approaches intersecting Aurora Avenue North are forecasted to operate at LOS E or better during both peak hours. This is because each of the stop-controlled approaches restricts the through and left-turn maneuvers that require the largest gaps and, therefore, experience the most delay. Right-turning vehicles require smaller gaps that allow them to enter the traffic stream more easily.

During the AM peak hour, all of the signalized intersections are forecasted to operate at LOS E or better. Similar results are expected in the PM peak hour except at N. 125th Street, N. 130th Street, and N. 145th Street. The intersection at N. 135th Street is predicted to operate at LOS D or better during both peak hours, but it is unlikely that the signal would operate this well with the expected queuing and blocking effects from adjacent signalized intersections. Three signalized intersections are predicted to operate at LOS F during the PM peak hour in both No-Build and Build conditions (N. 125th Street, N. 130th Street, and N. 145th Street). The Build condition shows that the delay at these intersections is predicted to worsen by 2 seconds (N. 125th Street) or improve by as much as 27 seconds per vehicle (N. 145th Street) compared to the No-Build.

Overall, the Build condition improves the operations of the signalized intersections, especially the stop-controlled approaches when compared to No-Build. The 2030 No-Build condition is predicted to have 10 instances of intersections operating at LOS F, whereas the

2030 Build condition is predicted to have 3 instances of intersections operating at LOS F. The proposed improvements totally eliminate the predicted instances of LOS F operation at stop-controlled approaches.

The recommended storage lengths were incorporated into the design to accommodate the 95th percentile queue lengths. In some cases this was not possible due to limitations of widening the side street approaches for additional turn lanes. This caused more of the cycle length to be used by the side street approaches and resulted in remaining areas of excessive queuing that exceed the available storage length of turn lanes or extend to an upstream study intersection. These queues block other vehicles and prohibit the progression of traffic along Aurora Avenue North. Table 15 shows the predicted 95th percentile queue lengths that will exceed the recommended storage.

TABLE 15
2030 Build AM and PM Peak Hour 95th Percentile Queue Lengths¹

Aurora Avenue North Intersection	Recommended Storage Lengths (ft)	AM 95th Percentile Queue (ft)	PM 95th Percentile Queue (ft)
N. 112th Street			
Eastbound Left	50	N/A	70
N. 115th Street			
Northbound Through (each lane)	820	N/A	1,440
N. 117th Street			
Westbound Left	240	N/A	250
Northbound Through (each lane)	890	N/A	1,660
N. 125th Street			
Eastbound Left	250	260	440
Westbound Left	150	200	180
N. 130th Street			
Eastbound Left	320	N/A	520
Westbound Left	380	530	600
Westbound Through (each lane)	660	N/A	730
Northbound Through (each lane)	330	N/A	1,550
Southbound Left	390	N/A	610
N. 135th Street			
Westbound Left	120	N/A	180
N. 145th Street			
Eastbound Left	120	190	500
Westbound Left	300	650	560
Westbound Right	300	N/A	530
Northbound Through (each lane)	670	N/A	1,290
Southbound Through (each lane)	990	1,120	N/A

¹ Queue lengths reported are those that exceed the recommended storage.

N/A: 95th percentile queue did not exceed recommended storage for that peak hour.

Storage and queue lengths rounded up to the nearest 10 feet.

In the future, only the stop-controlled intersections are predicted to have approaches without excessive queuing. The excessive queues are primarily predicted to occur during the PM peak hour except at N. 125th Street, N. 130th Street, and N. 145th Street, which all have excessive queuing during the AM peak hour. Although the analysis does not show it, excessive southbound queues could still be expected at N. 135th Street during both peak hours. The predicted 95th percentile queue lengths are reduced by the metering effect of upstream intersections. During the PM peak hour, vehicles in the northbound through lanes from N. 115th Street to N. 145th Street will block the upstream study intersection. This will also have a metering effect at adjacent study intersections like N. 125th Street.

Compared to the No-Build condition, the Build has the same number of intersections and three less approaches with 95th percentile queue lengths that exceed the recommended storage during the AM peak hour. And during the PM peak hour, the Build has one fewer intersection and six fewer approaches with 95th percentile queue lengths that exceed the recommended storage. The AM peak hour shows similar queuing to the No-Build, but the PM peak hour is predicted to have definite improvements to traffic moving along Aurora Avenue North. In addition, both peak travel periods will have reduced delays to stop-controlled approaches, as shown in Table 15.

Expected Improvements and Benefits

The improvements analyzed in the design year (2030) show that traffic operations at signalized intersections and stop-controlled approaches are predicted to improve compared to the No-Build condition. These improvements combined with the sidewalk, enhanced transit areas, and business access point consolidation into defined driveways are expected to provide benefits to transit operators and users, allow greater pedestrian usage and ease, and improve safety for all modes of travel.

Transit

The extension of the northbound BAT lane to south of N. 112th Street and the construction of a new southbound BAT lane can be expected to improve the reliability and speeds of the transit system serving north Seattle along Aurora Avenue North. Specifically, the BAT lane allows buses to avoid the congestion of the through lanes in both directions and for longer lengths of the route. This may allow for increased or new transit service.

The bus stops will be enhanced with urban treatments and lighting, thereby clearly defining them as transit areas and making them more secure. These transit-oriented improvements will be integrated with a continuous sidewalk system.

Pedestrian

The Aurora Avenue North improvements will improve conditions for pedestrians by providing a continuous sidewalk system on both sides of the roadway and easier access to the transit system. The project will widen the total width of the roadway, which will increase the time necessary for pedestrians to cross the street in crosswalks at signalized intersections.

Safety

Multiple locations along Aurora Avenue North have been identified as High Accident Locations (HAL) by WSDOT. The safety analysis indicated that the overall accident rate (7.31 accidents per million vehicle-miles) is approximately three times greater than the statewide average for similarly classed roadways. The safety analysis also showed that nearly half (48.4 percent) of the accidents were some form of angle or driveway accident. And approximately one-third (32%) of the accidents involved one of the vehicles turning left or the location of the impact being in the left-turn lane or TWLTL median at an unsignalized location.

Many of these accidents can be attributed to the continuous shoulder access to businesses. The access management provisions that were incorporated into the project are expected to reduce the accident experience along Aurora Avenue North.

Removing the center TWLTL and installing a landscaped median that will control access at mid-block locations and unsignalized intersections will limit the conflict points between opposite direction vehicles. This can be expected to contribute to a reduction in the driveway and angle type accidents.

Truck and Emergency Vehicle Access

The restrictive, landscaped medians included under the Build alternative would affect routing and access to properties along Aurora Avenue North. Trucks accessing Aurora Avenue North from regional points would be able to position for right-in/right-out access by using the I-5 interchanges at North 105th Street/Northgate Way, North 130th Street (to and from the south only), and North 145th Street to access properties on both sides of Aurora Avenue North. Once the proposed improvements have been constructed local truck traffic delivery routes will adjust so that access to the properties will be right-in and right-out movements. The nearest parallel arterials for use as truck circulation are Roosevelt Way North, Linden Avenue North, Dayton Avenue North, and Meridian Avenue North (City of Seattle Department of Transportation, *Major Truck Streets Map*, November 13, 2002).

Access to properties and cross streets will be maintained by locating mid-block and unsignalized median openings between signalized intersections. Left-turns for trucks and passenger vehicles and U-turns for passenger vehicles will be allowed from these openings. The same left and U-turn accommodations will be made at all signalized intersections. The Build alternative would have 9 unsignalized median openings along the 1.75-mile project. These openings will make it possible for trucks and emergency vehicles to make left-turns into unsignalized cross streets and properties along the project. The openings will be designed to accommodate a SU design vehicle, which is typically the size of truck used to make deliveries to residents and businesses. The City could monitor neighborhood streets for inappropriate truck traffic and take measures to discourage such action.

Neighborhood Traffic Impacts

Measures to address increases neighborhood traffic impacts could be applied during and after construction. The Neighborhood Traffic Control Program (NTCP) could be used to address cut-through traffic issues and inappropriate truck traffic. The NTCP is available to business owners, residents, and anyone in nearby neighborhoods to monitor traffic impacts on adjacent and parallel streets to Aurora Avenue North during and after construction. If a street has traffic growth resulting from the Aurora Avenue North Transit, Pedestrian, and Safety Improvement Project that is documented, then physical devices may be installed such as traffic circles, diverters, chicanes, or street closures.

Figures



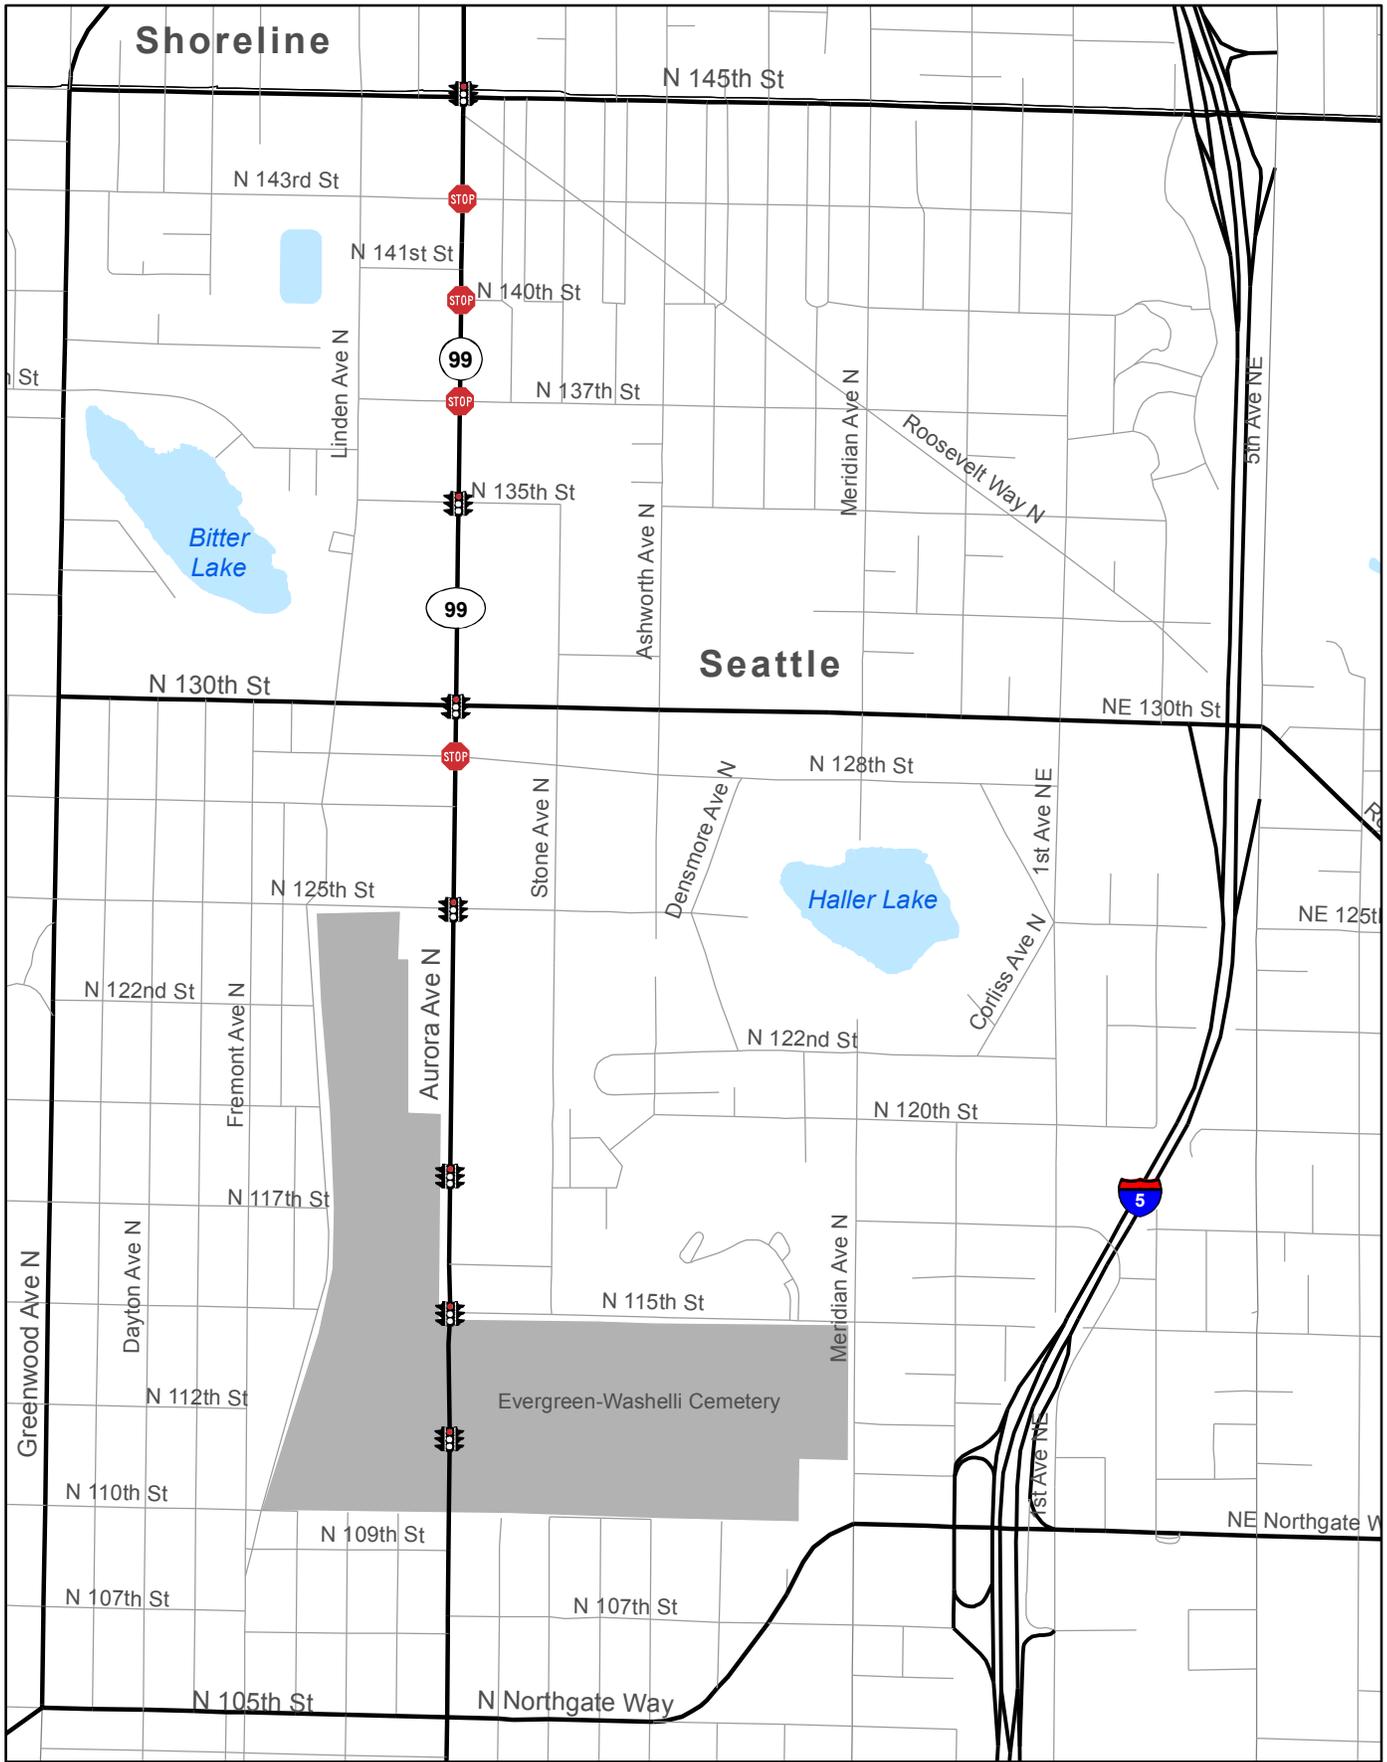



Figure 1. Vicinity Map
Aurora Avenue North, Transit,
Pedestrian, & Safety Improvements

 Signalized Intersection
 Stop Controlled Intersection



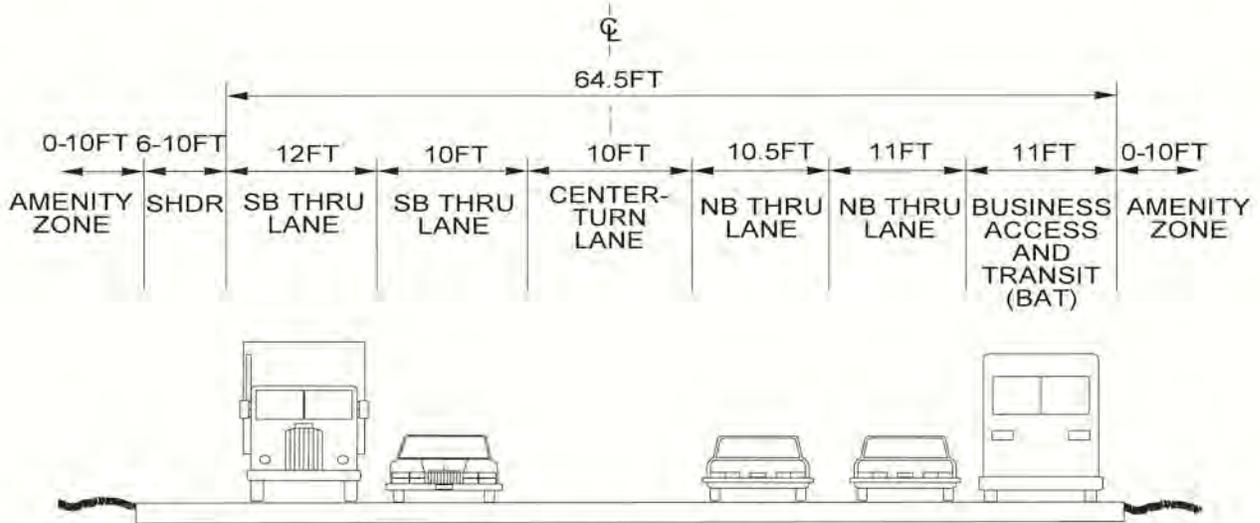


EXISTING CROSS SECTION

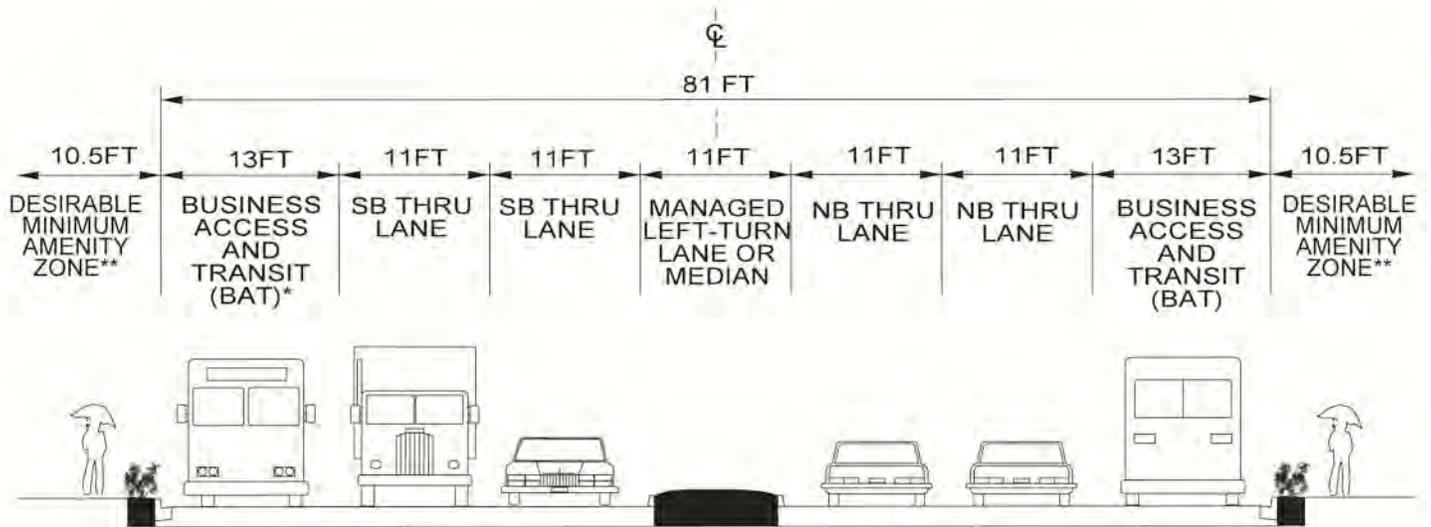


PROPOSED FUTURE CROSS SECTION

*SOUTHBOUND BAT LANE AND AMENITY ZONE TO BE CONSTRUCTED AS ROADWAY REDEVELOPMENT PROJECT

**AMENITY ZONE WIDTH MAY VARY DUE TO EXISTING STRUCTURES AND RIGHT-OF-WAY CONSTRAINTS

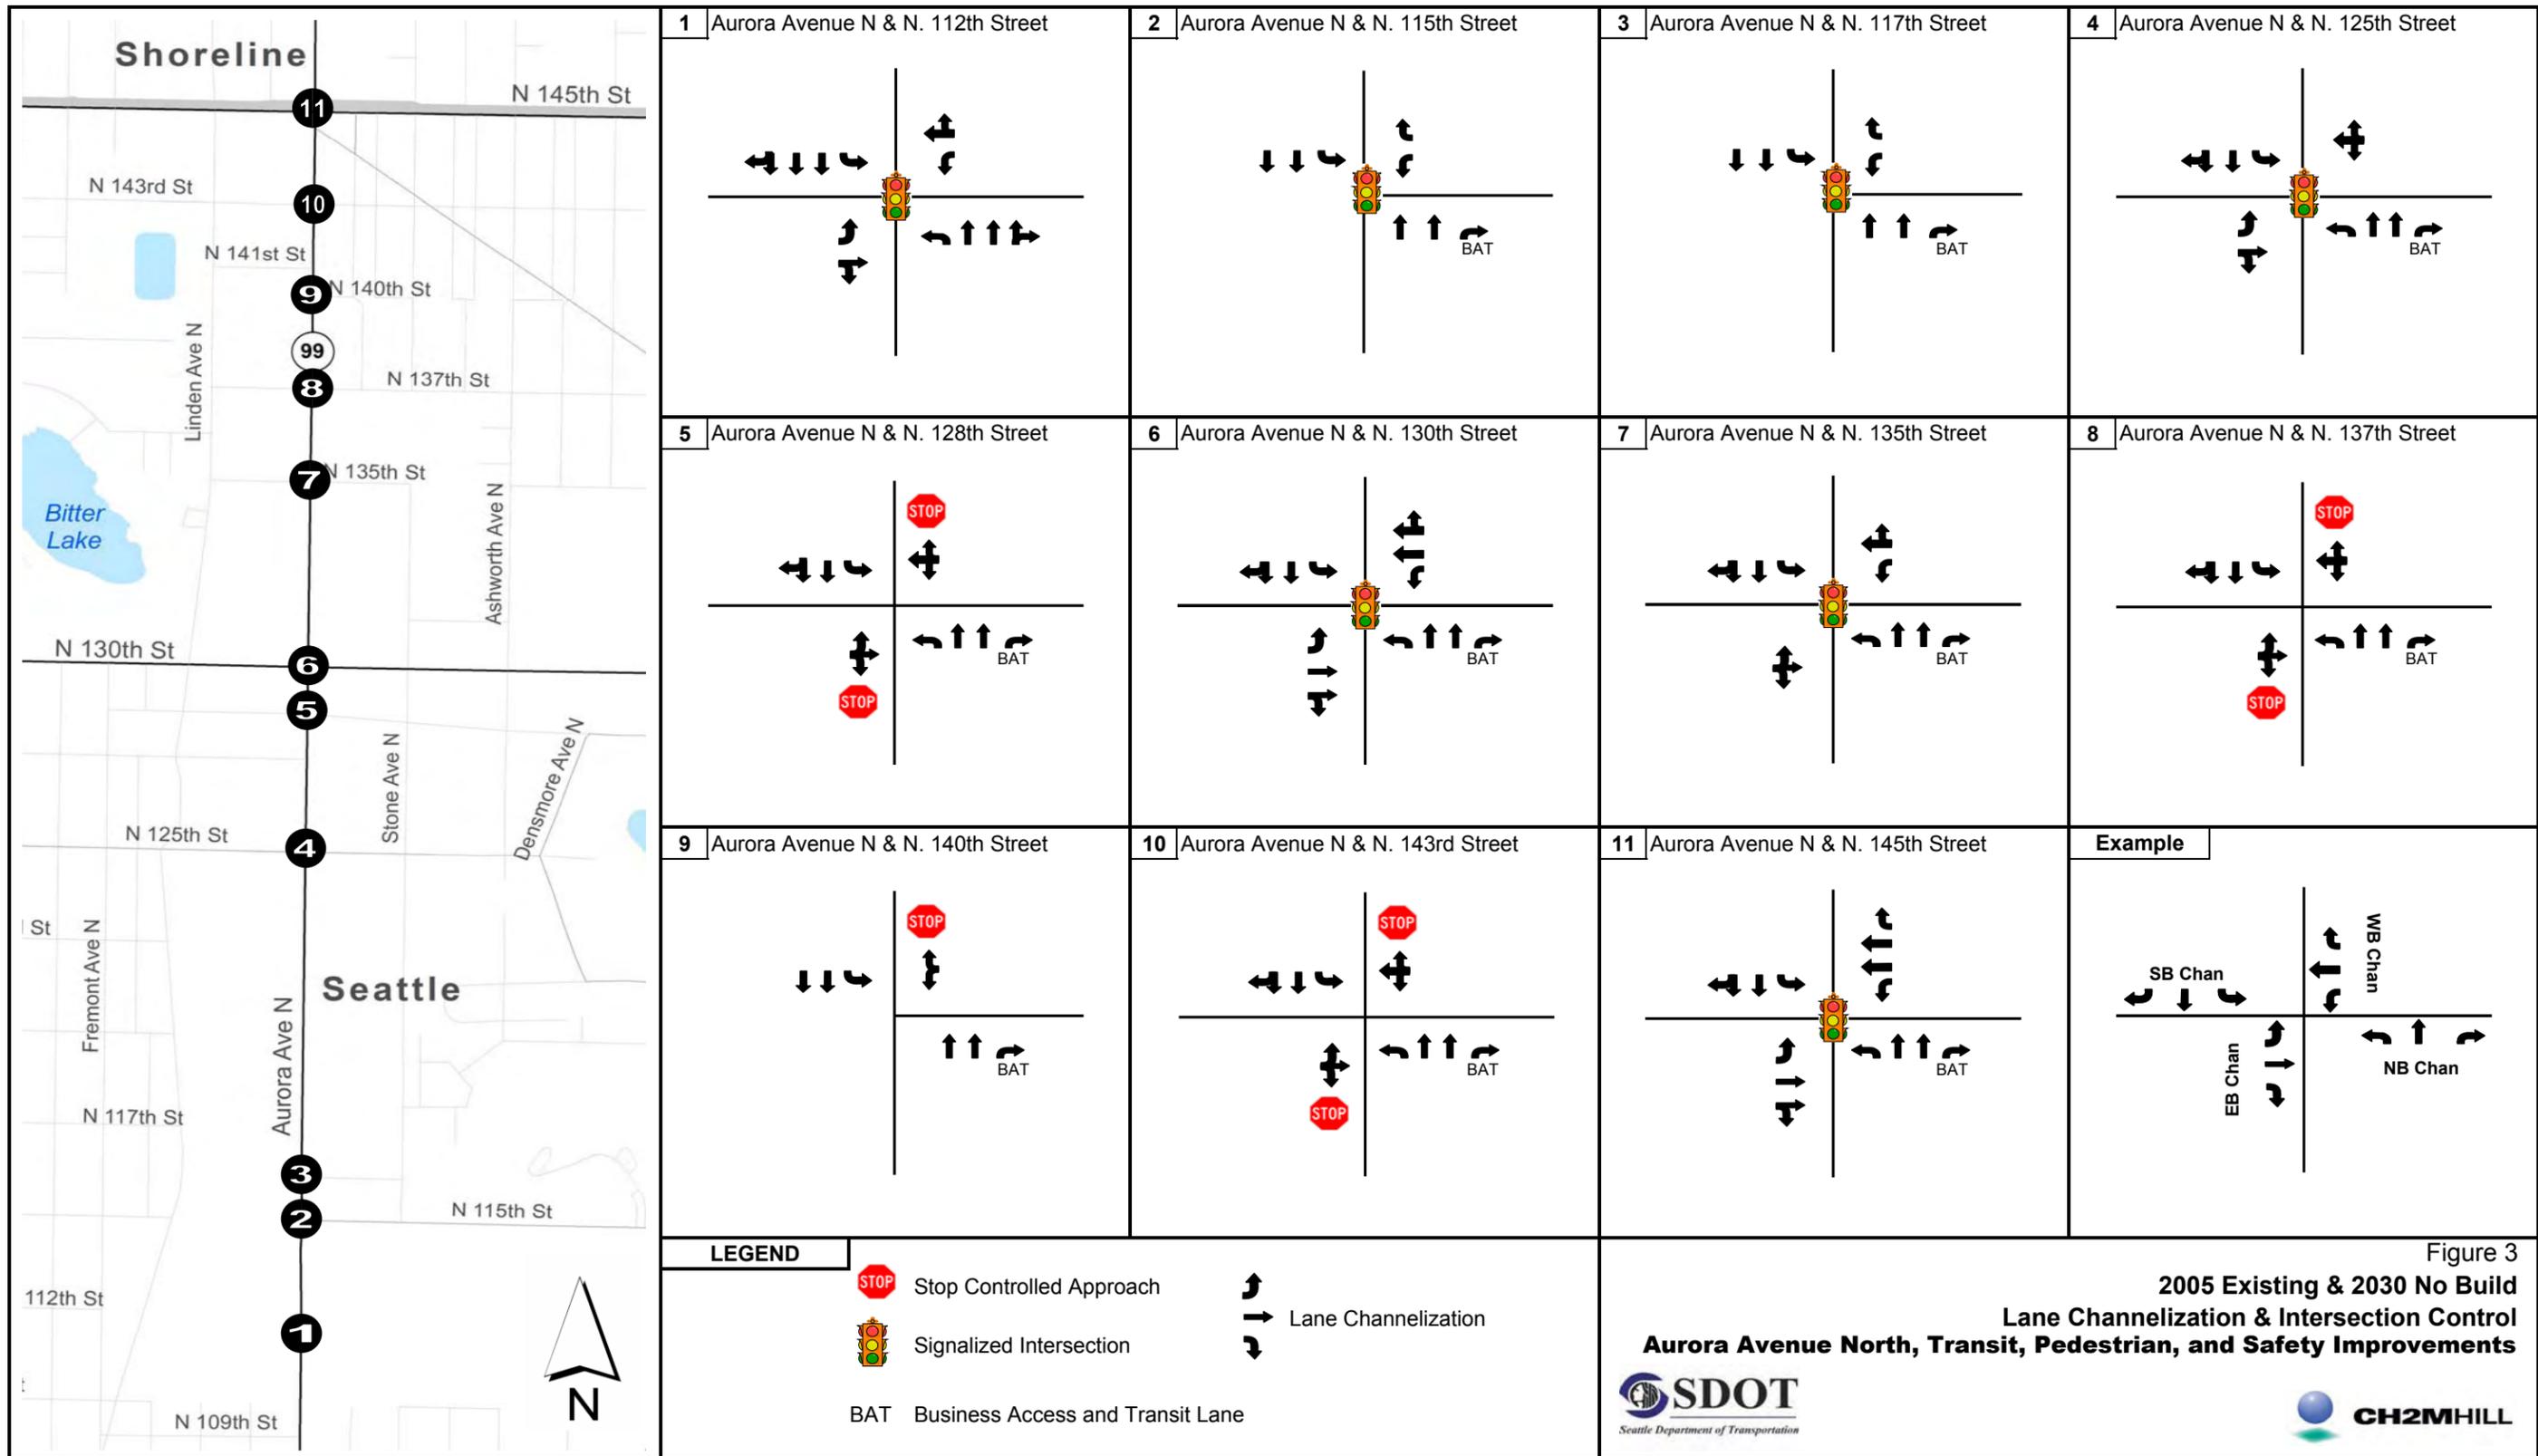

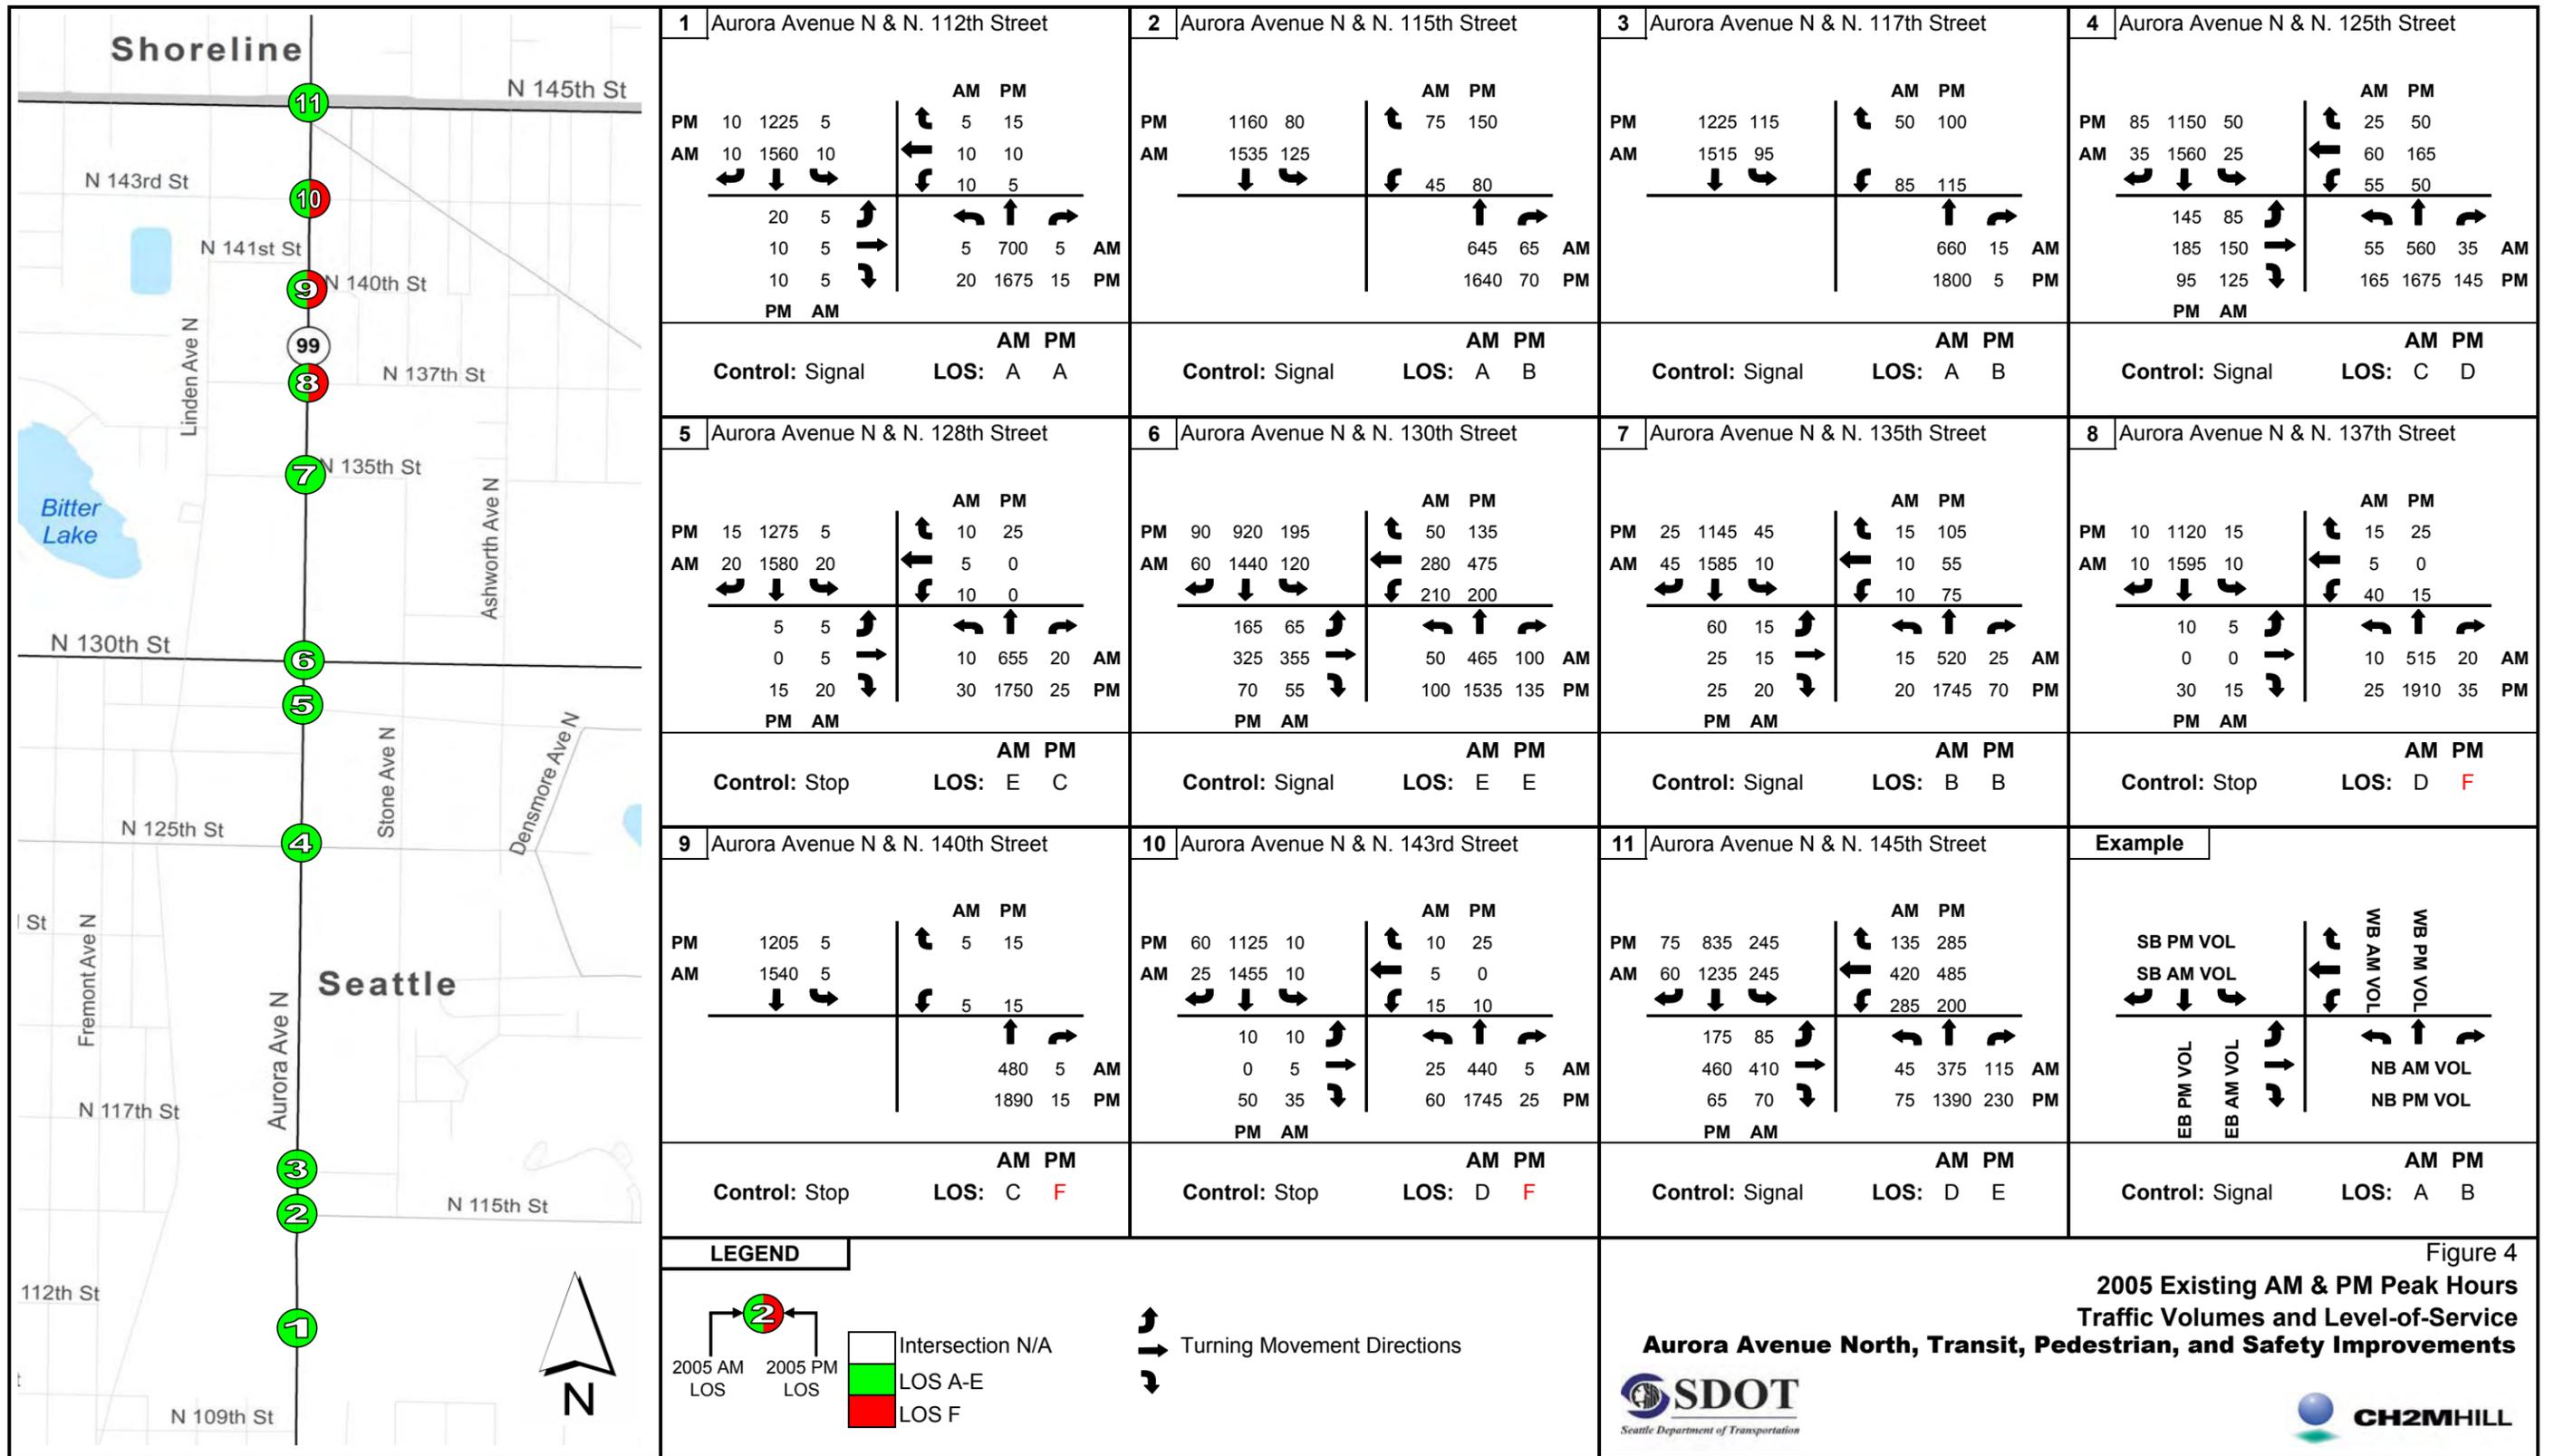

1 Aurora Avenue N & N. 112th Street

	AM	PM
PM	10 1225 5	5 15
AM	10 1560 10	10 10
	20 5	10 5
	10 5	5 700 5
	10 5	20 1675 15
	PM	AM

2 Aurora Avenue N & N. 115th Street

	AM	PM
PM	1160 80	75 150
AM	1535 125	45 80
		645 65
		1640 70
		AM
		PM

3 Aurora Avenue N & N. 117th Street

	AM	PM
PM	1225 115	50 100
AM	1515 95	85 115
		660 15
		1800 5
		AM
		PM

4 Aurora Avenue N & N. 125th Street

	AM	PM
PM	85 1150 50	25 50
AM	35 1560 25	60 165
	145 85	55 50
	185 150	55 560 35
	95 125	165 1675 145
	PM	AM

Control: Signal **LOS:** A A

Control: Signal **LOS:** A B

Control: Signal **LOS:** A B

Control: Signal **LOS:** C D

5 Aurora Avenue N & N. 128th Street

	AM	PM
PM	15 1275 5	10 25
AM	20 1580 20	5 0
	5 5	10 0
	0 5	10 655 20
	15 20	30 1750 25
	PM	AM

6 Aurora Avenue N & N. 130th Street

	AM	PM
PM	90 920 195	50 135
AM	60 1440 120	280 475
	165 65	210 200
	325 355	50 465 100
	70 55	100 1535 135
	PM	AM

7 Aurora Avenue N & N. 135th Street

	AM	PM
PM	25 1145 45	15 105
AM	45 1585 10	10 55
	60 15	10 75
	25 15	15 520 25
	25 20	20 1745 70
	PM	AM

8 Aurora Avenue N & N. 137th Street

	AM	PM
PM	10 1120 15	15 25
AM	10 1595 10	5 0
	10 5	40 15
	0 0	10 515 20
	30 15	25 1910 35
	PM	AM

Control: Stop **LOS:** E C

Control: Signal **LOS:** E E

Control: Signal **LOS:** B B

Control: Stop **LOS:** D F

9 Aurora Avenue N & N. 140th Street

	AM	PM
PM	1205 5	5 15
AM	1540 5	5 15
		480 5
		1890 15
		AM
		PM

10 Aurora Avenue N & N. 143rd Street

	AM	PM
PM	60 1125 10	10 25
AM	25 1455 10	5 0
	10 10	15 10
	0 5	25 440 5
	50 35	60 1745 25
	PM	AM

11 Aurora Avenue N & N. 145th Street

	AM	PM
PM	75 835 245	135 285
AM	60 1235 245	420 485
	175 85	285 200
	460 410	45 375 115
	65 70	75 1390 230
	PM	AM

Example


	AM	PM
SB PM VOL		
SB AM VOL		
EB PM VOL		
EB AM VOL		
WB AM VOL		
WB PM VOL		
NB AM VOL		
NB PM VOL		
	AM	PM

Control: Stop **LOS:** C F

Control: Stop **LOS:** D F

Control: Signal **LOS:** D E

Control: Signal **LOS:** A B

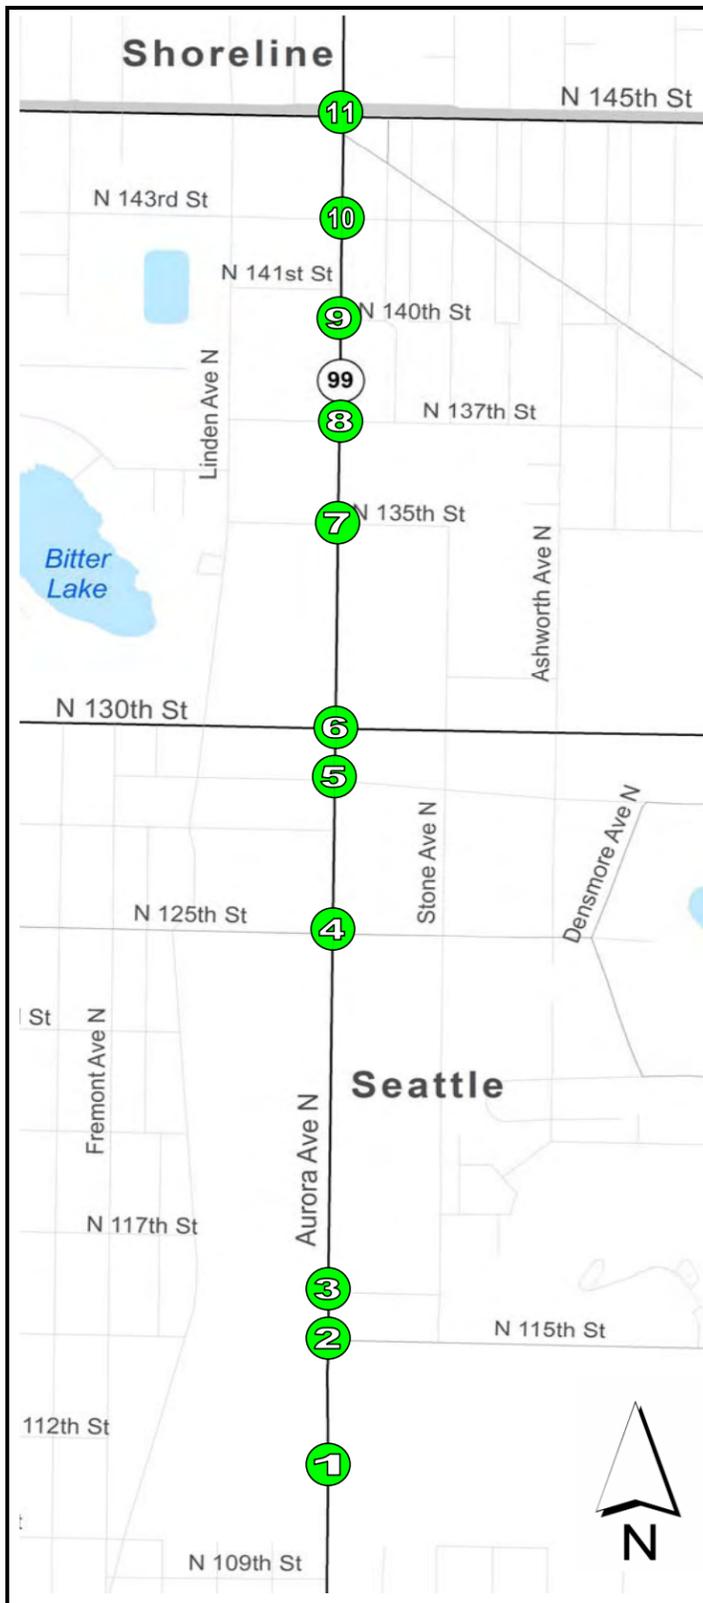

1 Aurora Avenue N & N. 112th Street																																																									
<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>15</td><td>1295</td><td>10</td><td>10</td></tr> <tr><td>15</td><td>1625</td><td>15</td><td>15</td></tr> <tr><td>25</td><td>10</td><td>15</td><td>10</td></tr> <tr><td>15</td><td>10</td><td>10</td><td>725</td></tr> <tr><td>15</td><td>10</td><td>25</td><td>1775</td></tr> <tr><td>PM</td><td>AM</td><td></td><td></td></tr> </table>	AM		PM		15	1295	10	10	15	1625	15	15	25	10	15	10	15	10	10	725	15	10	25	1775	PM	AM			<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>10</td><td>20</td><td></td><td></td></tr> <tr><td>15</td><td>15</td><td></td><td></td></tr> <tr><td>15</td><td>10</td><td></td><td></td></tr> <tr><td>10</td><td>725</td><td>10</td><td>AM</td></tr> <tr><td>25</td><td>1775</td><td>20</td><td>PM</td></tr> <tr><td></td><td></td><td></td><td></td></tr> </table>	AM		PM		10	20			15	15			15	10			10	725	10	AM	25	1775	20	PM				
AM		PM																																																							
15	1295	10	10																																																						
15	1625	15	15																																																						
25	10	15	10																																																						
15	10	10	725																																																						
15	10	25	1775																																																						
PM	AM																																																								
AM		PM																																																							
10	20																																																								
15	15																																																								
15	10																																																								
10	725	10	AM																																																						
25	1775	20	PM																																																						

Control: Signal LOS: A A

2 Aurora Avenue N & N. 115th Street																																																					
<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>1235</td><td>85</td><td>10</td><td>80</td></tr> <tr><td>1605</td><td>135</td><td>15</td><td>160</td></tr> <tr><td>50</td><td>85</td><td></td><td></td></tr> <tr><td>675</td><td>70</td><td></td><td>AM</td></tr> <tr><td>1745</td><td>75</td><td></td><td>PM</td></tr> <tr><td></td><td></td><td></td><td></td></tr> </table>	AM		PM		1235	85	10	80	1605	135	15	160	50	85			675	70		AM	1745	75		PM					<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>80</td><td>160</td><td></td><td></td></tr> <tr><td>50</td><td>85</td><td></td><td></td></tr> <tr><td>675</td><td>70</td><td></td><td>AM</td></tr> <tr><td>1745</td><td>75</td><td></td><td>PM</td></tr> <tr><td></td><td></td><td></td><td></td></tr> </table>	AM		PM		80	160			50	85			675	70		AM	1745	75		PM				
AM		PM																																																			
1235	85	10	80																																																		
1605	135	15	160																																																		
50	85																																																				
675	70		AM																																																		
1745	75		PM																																																		
AM		PM																																																			
80	160																																																				
50	85																																																				
675	70		AM																																																		
1745	75		PM																																																		

Control: Signal LOS: B B

3 Aurora Avenue N & N. 117th Street																																																					
<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>1305</td><td>125</td><td>10</td><td>55</td></tr> <tr><td>1580</td><td>100</td><td>15</td><td>110</td></tr> <tr><td>90</td><td>125</td><td></td><td></td></tr> <tr><td>690</td><td>20</td><td></td><td>AM</td></tr> <tr><td>1915</td><td>10</td><td></td><td>PM</td></tr> <tr><td></td><td></td><td></td><td></td></tr> </table>	AM		PM		1305	125	10	55	1580	100	15	110	90	125			690	20		AM	1915	10		PM					<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>55</td><td>110</td><td></td><td></td></tr> <tr><td>90</td><td>125</td><td></td><td></td></tr> <tr><td>690</td><td>20</td><td></td><td>AM</td></tr> <tr><td>1915</td><td>10</td><td></td><td>PM</td></tr> <tr><td></td><td></td><td></td><td></td></tr> </table>	AM		PM		55	110			90	125			690	20		AM	1915	10		PM				
AM		PM																																																			
1305	125	10	55																																																		
1580	100	15	110																																																		
90	125																																																				
690	20		AM																																																		
1915	10		PM																																																		
AM		PM																																																			
55	110																																																				
90	125																																																				
690	20		AM																																																		
1915	10		PM																																																		

Control: Signal LOS: A B

4 Aurora Avenue N & N. 125th Street																																																									
<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>95</td><td>1225</td><td>55</td><td>35</td></tr> <tr><td>40</td><td>1630</td><td>30</td><td>60</td></tr> <tr><td>155</td><td>90</td><td>5</td><td>60</td></tr> <tr><td>200</td><td>160</td><td>5</td><td>60</td></tr> <tr><td>105</td><td>135</td><td>20</td><td>180</td></tr> <tr><td>PM</td><td>AM</td><td></td><td></td></tr> </table>	AM		PM		95	1225	55	35	40	1630	30	60	155	90	5	60	200	160	5	60	105	135	20	180	PM	AM			<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>30</td><td>55</td><td></td><td></td></tr> <tr><td>65</td><td>180</td><td></td><td></td></tr> <tr><td>60</td><td>55</td><td></td><td></td></tr> <tr><td>5</td><td>60</td><td>585</td><td>40</td></tr> <tr><td>20</td><td>180</td><td>1780</td><td>155</td></tr> <tr><td></td><td></td><td></td><td></td></tr> </table>	AM		PM		30	55			65	180			60	55			5	60	585	40	20	180	1780	155				
AM		PM																																																							
95	1225	55	35																																																						
40	1630	30	60																																																						
155	90	5	60																																																						
200	160	5	60																																																						
105	135	20	180																																																						
PM	AM																																																								
AM		PM																																																							
30	55																																																								
65	180																																																								
60	55																																																								
5	60	585	40																																																						
20	180	1780	155																																																						

Control: Signal LOS: C D

5 Aurora Avenue N & N. 128th Street																																													
<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>60</td><td>1370</td><td>40</td><td>40</td></tr> <tr><td>50</td><td>1690</td><td></td><td></td></tr> <tr><td>710</td><td>60</td><td></td><td>AM</td></tr> <tr><td>1905</td><td>45</td><td></td><td>PM</td></tr> <tr><td></td><td></td><td></td><td></td></tr> </table>	AM		PM		60	1370	40	40	50	1690			710	60		AM	1905	45		PM					<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>40</td><td>40</td><td></td><td></td></tr> <tr><td>710</td><td>60</td><td></td><td>AM</td></tr> <tr><td>1905</td><td>45</td><td></td><td>PM</td></tr> <tr><td></td><td></td><td></td><td></td></tr> </table>	AM		PM		40	40			710	60		AM	1905	45		PM				
AM		PM																																											
60	1370	40	40																																										
50	1690																																												
710	60		AM																																										
1905	45		PM																																										
AM		PM																																											
40	40																																												
710	60		AM																																										
1905	45		PM																																										

Control: Stop LOS: B B

6 Aurora Avenue N & N. 130th Street																																																									
<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>100</td><td>980</td><td>210</td><td>10</td></tr> <tr><td>65</td><td>1505</td><td>130</td><td>15</td></tr> <tr><td>180</td><td>70</td><td>45</td><td>55</td></tr> <tr><td>345</td><td>375</td><td>485</td><td>105</td></tr> <tr><td>75</td><td>60</td><td>1630</td><td>145</td></tr> <tr><td>PM</td><td>AM</td><td></td><td></td></tr> </table>	AM		PM		100	980	210	10	65	1505	130	15	180	70	45	55	345	375	485	105	75	60	1630	145	PM	AM			<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>55</td><td>145</td><td></td><td></td></tr> <tr><td>295</td><td>505</td><td></td><td></td></tr> <tr><td>220</td><td>215</td><td></td><td></td></tr> <tr><td>45</td><td>55</td><td>485</td><td>105</td></tr> <tr><td>60</td><td>110</td><td>1630</td><td>145</td></tr> <tr><td></td><td></td><td></td><td></td></tr> </table>	AM		PM		55	145			295	505			220	215			45	55	485	105	60	110	1630	145				
AM		PM																																																							
100	980	210	10																																																						
65	1505	130	15																																																						
180	70	45	55																																																						
345	375	485	105																																																						
75	60	1630	145																																																						
PM	AM																																																								
AM		PM																																																							
55	145																																																								
295	505																																																								
220	215																																																								
45	55	485	105																																																						
60	110	1630	145																																																						

Control: Signal LOS: D E

7 Aurora Avenue N & N. 135th Street																																																									
<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>30</td><td>1220</td><td>50</td><td>30</td></tr> <tr><td>50</td><td>1655</td><td>15</td><td>30</td></tr> <tr><td>65</td><td>20</td><td>15</td><td>20</td></tr> <tr><td>30</td><td>20</td><td>545</td><td>30</td></tr> <tr><td>30</td><td>25</td><td>1855</td><td>75</td></tr> <tr><td>PM</td><td>AM</td><td></td><td></td></tr> </table>	AM		PM		30	1220	50	30	50	1655	15	30	65	20	15	20	30	20	545	30	30	25	1855	75	PM	AM			<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>20</td><td>115</td><td></td><td></td></tr> <tr><td>15</td><td>60</td><td></td><td></td></tr> <tr><td>15</td><td>80</td><td></td><td></td></tr> <tr><td>15</td><td>20</td><td>545</td><td>30</td></tr> <tr><td>15</td><td>25</td><td>1855</td><td>75</td></tr> <tr><td></td><td></td><td></td><td></td></tr> </table>	AM		PM		20	115			15	60			15	80			15	20	545	30	15	25	1855	75				
AM		PM																																																							
30	1220	50	30																																																						
50	1655	15	30																																																						
65	20	15	20																																																						
30	20	545	30																																																						
30	25	1855	75																																																						
PM	AM																																																								
AM		PM																																																							
20	115																																																								
15	60																																																								
15	80																																																								
15	20	545	30																																																						
15	25	1855	75																																																						

Control: Signal LOS: A B

8 Aurora Avenue N & N. 137th Street																																													
<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>20</td><td>1210</td><td>20</td><td>10</td></tr> <tr><td>25</td><td>1710</td><td>15</td><td>15</td></tr> <tr><td>5</td><td>15</td><td>550</td><td>30</td></tr> <tr><td>20</td><td>30</td><td>2045</td><td>45</td></tr> <tr><td>PM</td><td>AM</td><td></td><td></td></tr> </table>	AM		PM		20	1210	20	10	25	1710	15	15	5	15	550	30	20	30	2045	45	PM	AM			<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>75</td><td>55</td><td></td><td></td></tr> <tr><td>5</td><td>15</td><td>550</td><td>30</td></tr> <tr><td>20</td><td>30</td><td>2045</td><td>45</td></tr> <tr><td></td><td></td><td></td><td></td></tr> </table>	AM		PM		75	55			5	15	550	30	20	30	2045	45				
AM		PM																																											
20	1210	20	10																																										
25	1710	15	15																																										
5	15	550	30																																										
20	30	2045	45																																										
PM	AM																																												
AM		PM																																											
75	55																																												
5	15	550	30																																										
20	30	2045	45																																										

Control: Stop LOS: C C

9 Aurora Avenue N & N. 140th Street																																													
<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>1325</td><td>10</td><td>45</td><td>20</td></tr> <tr><td>1675</td><td>10</td><td>55</td><td>40</td></tr> <tr><td>560</td><td>10</td><td></td><td>AM</td></tr> <tr><td>2035</td><td>20</td><td></td><td>PM</td></tr> <tr><td></td><td></td><td></td><td></td></tr> </table>	AM		PM		1325	10	45	20	1675	10	55	40	560	10		AM	2035	20		PM					<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>20</td><td>40</td><td></td><td></td></tr> <tr><td>560</td><td>10</td><td></td><td>AM</td></tr> <tr><td>2035</td><td>20</td><td></td><td>PM</td></tr> <tr><td></td><td></td><td></td><td></td></tr> </table>	AM		PM		20	40			560	10		AM	2035	20		PM				
AM		PM																																											
1325	10	45	20																																										
1675	10	55	40																																										
560	10		AM																																										
2035	20		PM																																										
AM		PM																																											
20	40																																												
560	10		AM																																										
2035	20		PM																																										

Control: Stop LOS: B D

10 Aurora Avenue N & N. 143rd Street																																													
<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>70</td><td>1225</td><td>45</td><td>50</td></tr> <tr><td>40</td><td>1555</td><td></td><td></td></tr> <tr><td>70</td><td>30</td><td>475</td><td>35</td></tr> <tr><td>60</td><td>65</td><td>1870</td><td>50</td></tr> <tr><td>PM</td><td>AM</td><td></td><td></td></tr> </table>	AM		PM		70	1225	45	50	40	1555			70	30	475	35	60	65	1870	50	PM	AM			<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>45</td><td>50</td><td></td><td></td></tr> <tr><td>70</td><td>30</td><td>475</td><td>35</td></tr> <tr><td>60</td><td>65</td><td>1870</td><td>50</td></tr> <tr><td></td><td></td><td></td><td></td></tr> </table>	AM		PM		45	50			70	30	475	35	60	65	1870	50				
AM		PM																																											
70	1225	45	50																																										
40	1555																																												
70	30	475	35																																										
60	65	1870	50																																										
PM	AM																																												
AM		PM																																											
45	50																																												
70	30	475	35																																										
60	65	1870	50																																										

Control: Stop LOS: B C

11 Aurora Avenue N & N. 145th Street																																																									
<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>80</td><td>890</td><td>265</td><td>10</td></tr> <tr><td>65</td><td>1290</td><td>260</td><td>15</td></tr> <tr><td>190</td><td>90</td><td>35</td><td>50</td></tr> <tr><td>490</td><td>430</td><td>35</td><td>80</td></tr> <tr><td>70</td><td>75</td><td>1480</td><td>245</td></tr> <tr><td>PM</td><td>AM</td><td></td><td></td></tr> </table>	AM		PM		80	890	265	10	65	1290	260	15	190	90	35	50	490	430	35	80	70	75	1480	245	PM	AM			<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>145</td><td>305</td><td></td><td></td></tr> <tr><td>440</td><td>515</td><td></td><td></td></tr> <tr><td>300</td><td>215</td><td></td><td></td></tr> <tr><td>35</td><td>50</td><td>395</td><td>120</td></tr> <tr><td>35</td><td>80</td><td>1480</td><td>245</td></tr> <tr><td></td><td></td><td></td><td></td></tr> </table>	AM		PM		145	305			440	515			300	215			35	50	395	120	35	80	1480	245				
AM		PM																																																							
80	890	265	10																																																						
65	1290	260	15																																																						
190	90	35	50																																																						
490	430	35	80																																																						
70	75	1480	245																																																						
PM	AM																																																								
AM		PM																																																							
145	305																																																								
440	515																																																								
300	215																																																								
35	50	395	120																																																						
35	80	1480	245																																																						


Control: Signal LOS: D D

Example																																																					
<table border="1"> <tr><th colspan="2">SB PM VOL</th><th colspan="2">WB AM VOL</th><th colspan="2">WB PM VOL</th></tr> <tr><td>↓</td><td>↓</td><td>↑</td><td>↑</td><td>↑</td><td>↑</td></tr> <tr><th colspan="2">SB AM VOL</th><th colspan="2">NB AM VOL</th><th colspan="2">NB PM VOL</th></tr> <tr><td>↓</td><td>↓</td><td>↑</td><td>↑</td><td>↑</td><td>↑</td></tr> <tr><th colspan="2">EB PM VOL</th><th colspan="2">EB AM VOL</th><td></td><td></td></tr> <tr><td>↓</td><td>↓</td><td>↑</td><td>↑</td><td></td><td></td></tr> </table>	SB PM VOL		WB AM VOL		WB PM VOL		↓	↓	↑	↑	↑	↑	SB AM VOL		NB AM VOL		NB PM VOL		↓	↓	↑	↑	↑	↑	EB PM VOL		EB AM VOL				↓	↓	↑	↑			<table border="1"> <tr><th colspan="2">AM</th><th colspan="2">PM</th></tr> <tr><td>LOS</td><td>LOS</td><td>LOS</td><td>LOS</td></tr> <tr><td>A</td><td>B</td><td>A</td><td>B</td></tr> <tr><td></td><td></td><td></td><td></td></tr> </table>	AM		PM		LOS	LOS	LOS	LOS	A	B	A	B				
SB PM VOL		WB AM VOL		WB PM VOL																																																	
↓	↓	↑	↑	↑	↑																																																
SB AM VOL		NB AM VOL		NB PM VOL																																																	
↓	↓	↑	↑	↑	↑																																																
EB PM VOL		EB AM VOL																																																			
↓	↓	↑	↑																																																		
AM		PM																																																			
LOS	LOS	LOS	LOS																																																		
A	B	A	B																																																		

Control: Signal LOS: A B

LEGEND

Figure 5
2010 Build AM & PM Peak Hours
Traffic Volumes and Level-of-Service
Aurora Avenue North, Transit, Pedestrian, and Safety Improvements

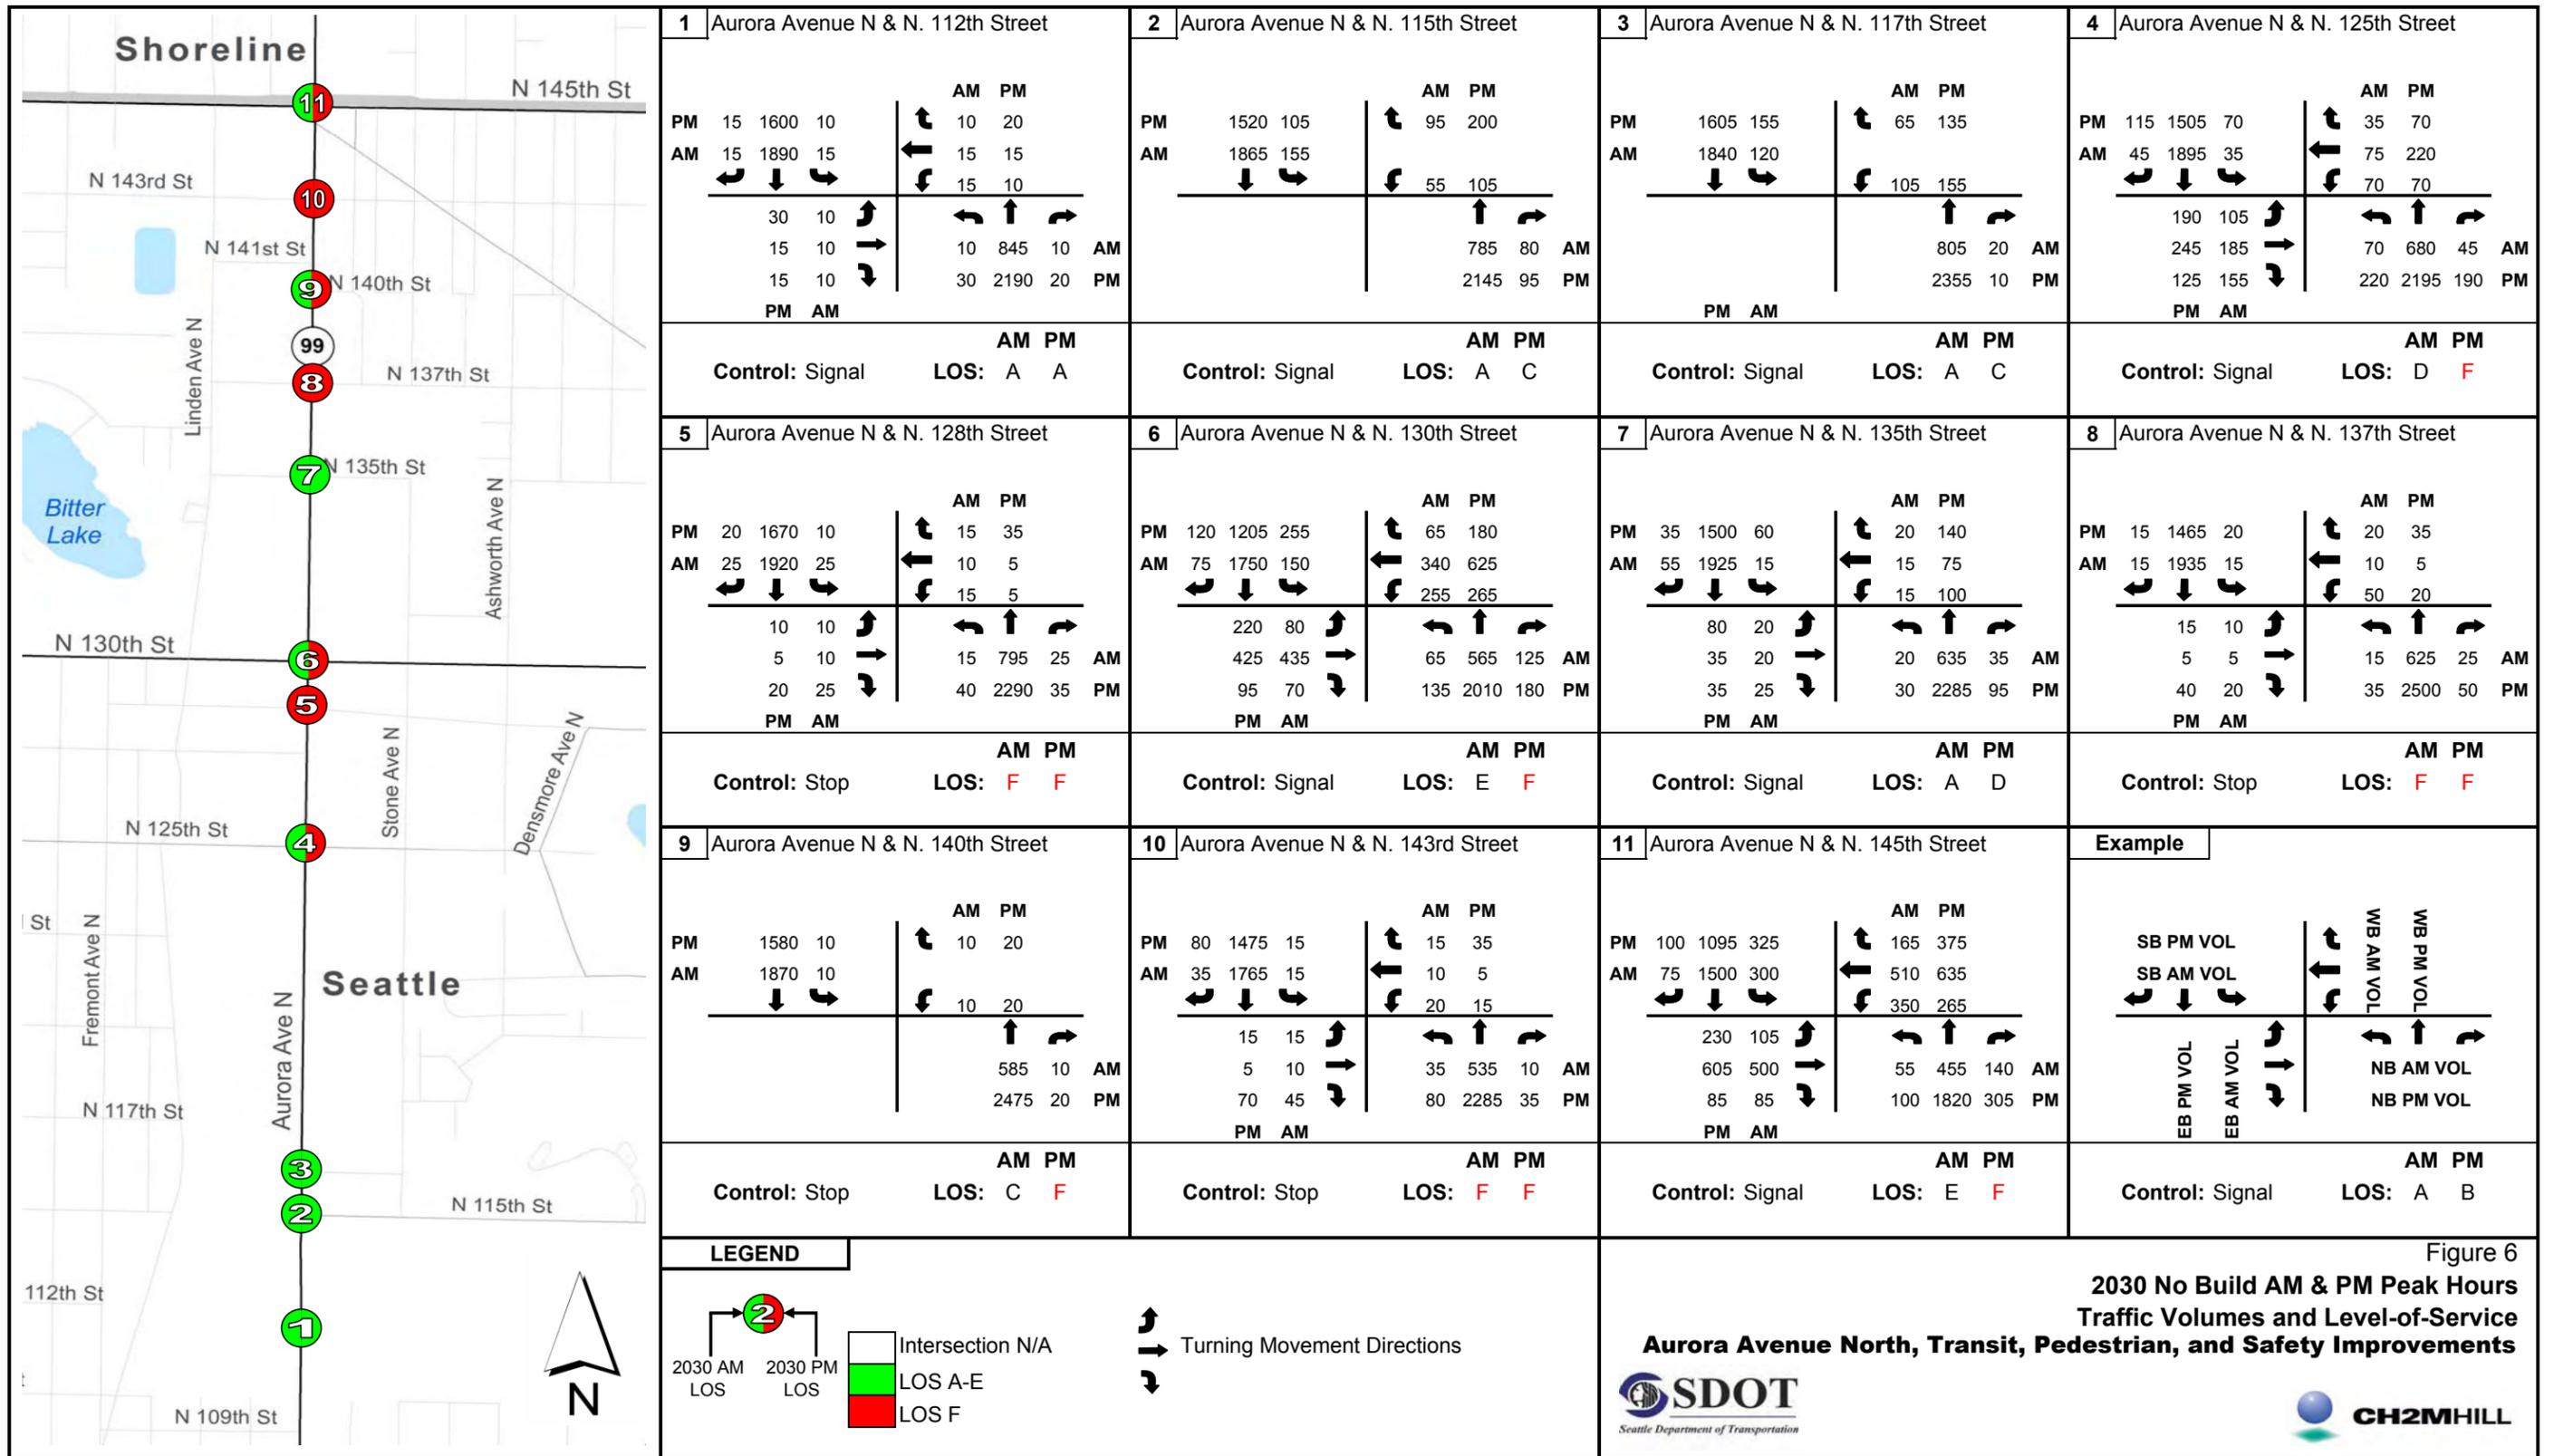

1 Aurora Avenue N & N. 112th Street

	AM	PM
PM	15 1600 10	10 20
AM	15 1890 15	15 15
	30 10	15 10
	15 10	10 845 10
	15 10	30 2190 20
	PM	AM

2 Aurora Avenue N & N. 115th Street

	AM	PM
PM	1520 105	95 200
AM	1865 155	55 105
		785 80
		2145 95
		AM
		PM

3 Aurora Avenue N & N. 117th Street

	AM	PM
PM	1605 155	65 135
AM	1840 120	105 155
		805 20
		2355 10
		AM
		PM

4 Aurora Avenue N & N. 125th Street

	AM	PM
PM	115 1505 70	35 70
AM	45 1895 35	75 220
	190 105	70 70
	245 185	70 680 45
	125 155	220 2195 190
	PM	AM

Control: Signal **LOS:** A A

Control: Signal **LOS:** A C

Control: Signal **LOS:** A C

Control: Signal **LOS:** D F

5 Aurora Avenue N & N. 128th Street

	AM	PM
PM	20 1670 10	15 35
AM	25 1920 25	10 5
	10 10	15 5
	5 10	15 795 25
	20 25	40 2290 35
	PM	AM

6 Aurora Avenue N & N. 130th Street

	AM	PM
PM	120 1205 255	65 180
AM	75 1750 150	340 625
	220 80	255 265
	425 435	65 565 125
	95 70	135 2010 180
	PM	AM

7 Aurora Avenue N & N. 135th Street

	AM	PM
PM	35 1500 60	20 140
AM	55 1925 15	15 75
	80 20	15 100
	35 20	20 635 35
	35 25	30 2285 95
	PM	AM

8 Aurora Avenue N & N. 137th Street

	AM	PM
PM	15 1465 20	20 35
AM	15 1935 15	10 5
	15 10	50 20
	5 5	15 625 25
	40 20	35 2500 50
	PM	AM

Control: Stop **LOS:** F F

Control: Signal **LOS:** E F

Control: Signal **LOS:** A D

Control: Stop **LOS:** F F

9 Aurora Avenue N & N. 140th Street

	AM	PM
PM	1580 10	10 20
AM	1870 10	10 20
		585 10
		2475 20
		AM
		PM

10 Aurora Avenue N & N. 143rd Street

	AM	PM
PM	80 1475 15	15 35
AM	35 1765 15	10 5
	15 15	20 15
	5 10	35 535 10
	70 45	80 2285 35
	PM	AM

11 Aurora Avenue N & N. 145th Street

	AM	PM
PM	100 1095 325	165 375
AM	75 1500 300	510 635
	230 105	350 265
	605 500	55 455 140
	85 85	100 1820 305
	PM	AM

Example


	AM	PM
SB PM VOL		WB AM VOL
SB AM VOL		WB PM VOL
EB PM VOL		NB AM VOL
EB AM VOL		NB PM VOL
	AM	PM

Control: Stop **LOS:** C F

Control: Stop **LOS:** F F

Control: Signal **LOS:** E F

Control: Signal **LOS:** A B

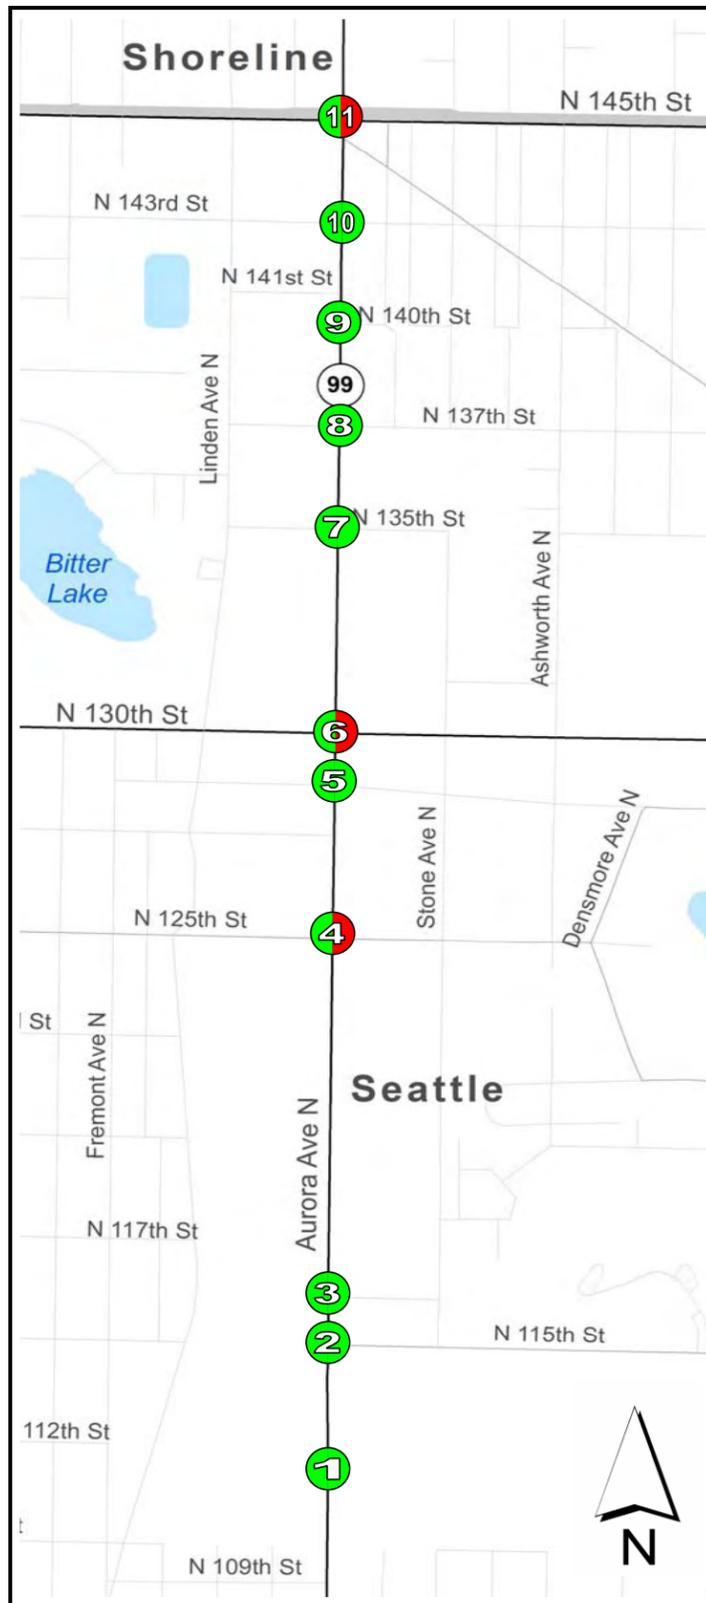

1 Aurora Avenue N & N. 112th Street

	AM	PM
PM	15 1600 10	10 20
AM	15 1890 15	15 15
	30 10	15 10
	15 10	10 845 10
	15 10	30 2190 20
	PM	AM

2 Aurora Avenue N & N. 115th Street

	AM	PM
PM	1520 105 15	95 200
AM	1865 155 15	55 105
		785 80
		2145 95
		AM
		PM

3 Aurora Avenue N & N. 117th Street

	AM	PM
PM	1605 155 15	65 135
AM	1840 120 15	105 155
		805 20
		2355 10
		AM
		PM

4 Aurora Avenue N & N. 125th Street

	AM	PM
PM	115 1505 70 40	35 70
AM	45 1895 35 60	75 220
	190 105	70 70
	245 185	5 70 680 45
	125 155	20 220 2195 190
	PM	AM

Control: Signal LOS: A A

Control: Signal LOS: B C

Control: Signal LOS: A E

Control: Signal LOS: D F

5 Aurora Avenue N & N. 128th Street

	AM	PM
PM	65 1685	40 45
AM	50 1960	
	35 45	820 60
	PM	AM
		2340 50

6 Aurora Avenue N & N. 130th Street

	AM	PM
PM	120 1205 255 15	65 180
AM	75 1750 150 15	340 625
	220 80	255 265
	425 435	45 65 565 125
	95 70	70 135 2010 180
	PM	AM

7 Aurora Avenue N & N. 135th Street

	AM	PM
PM	35 1500 60 35	20 140
AM	55 1925 15 30	15 75
	80 20	15 100
	35 20	5 20 635 35
	35 25	20 30 2285 95
	PM	AM

8 Aurora Avenue N & N. 137th Street

	AM	PM
PM	20 1485 20 15	80 60
AM	25 1985 15 15	
	60 35	5 15 635 30
	PM	AM
		20 35 2515 55

Control: Stop LOS: B C

Control: Signal LOS: E F

Control: Signal LOS: A D

Control: Stop LOS: D C

9 Aurora Avenue N & N. 140th Street

	AM	PM
PM	1625 10 50	20 40
AM	1940 10 55	
		645 10
		2500 20
		AM
		PM

10 Aurora Avenue N & N. 143rd Street

	AM	PM
PM	85 1505	45 55
AM	45 1800	
	90 70	75 35 550 35
	PM	AM
		65 80 2300 65

11 Aurora Avenue N & N. 145th Street

	AM	PM
PM	100 1095 325 15	165 375
AM	75 1500 300 15	510 635
	230 105	350 265
	605 500	35 55 455 140
	85 85	40 100 1820 305
	PM	AM

Example

	AM	PM
SB PM VOL		WB AM VOL
SB AM VOL		WB PM VOL
EB PM VOL		NB AM VOL
EB AM VOL		NB PM VOL
	AM	PM
	LOS: A	LOS: B

Control: Stop LOS: B E

Control: Stop LOS: B E

Control: Signal LOS: E F

Control: Signal LOS: A B

LEGEND














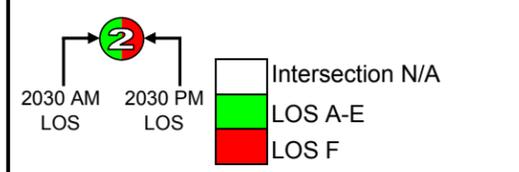


Figure 7
2030 Build AM & PM Peak Hours
Traffic Volumes and Level-of-Service
Aurora Avenue North, Transit, Pedestrian, and Safety Improvements

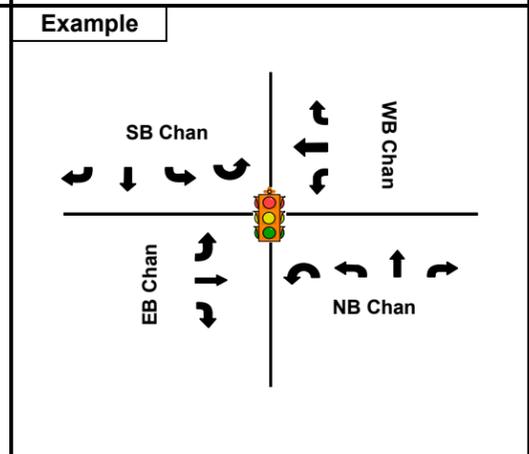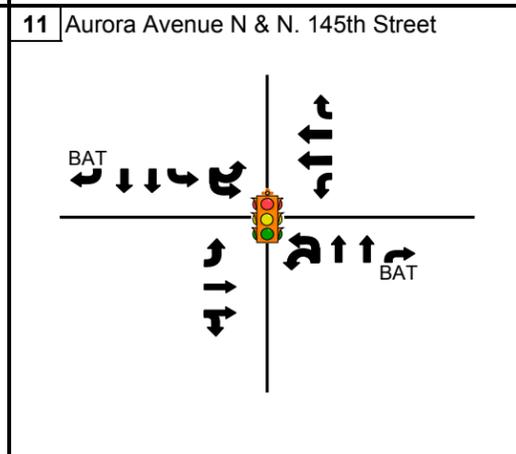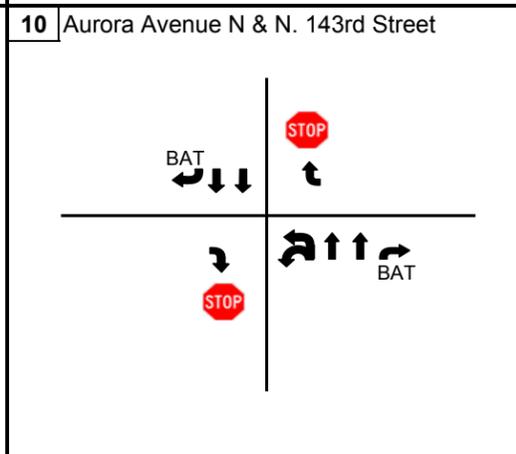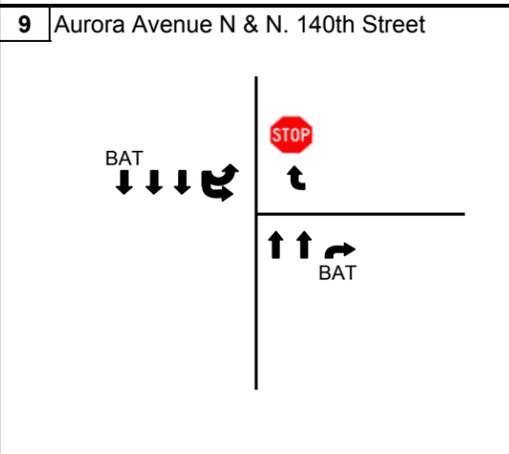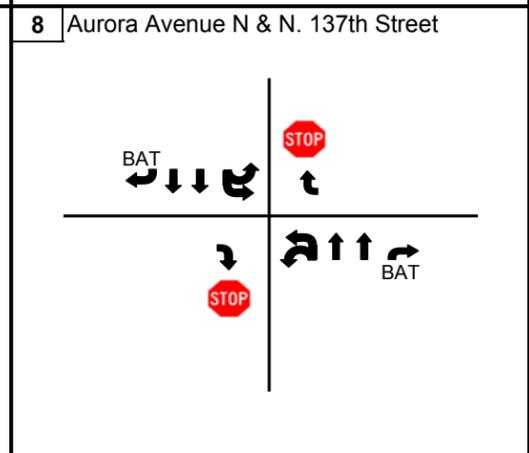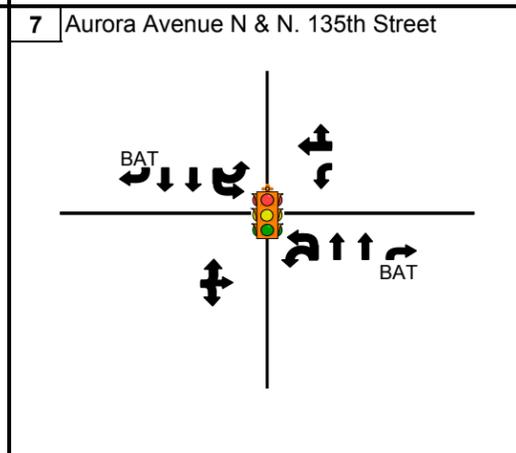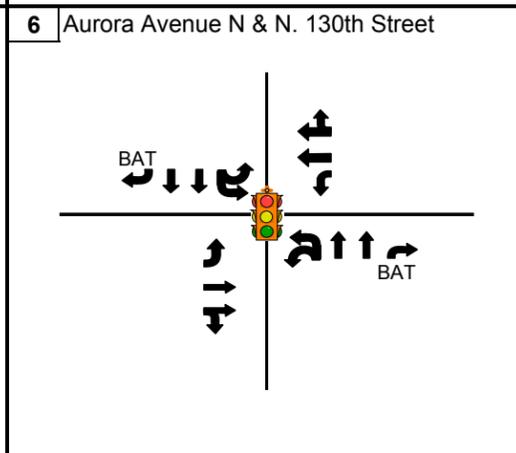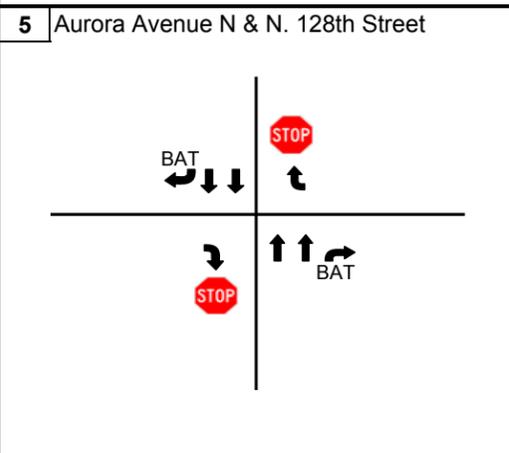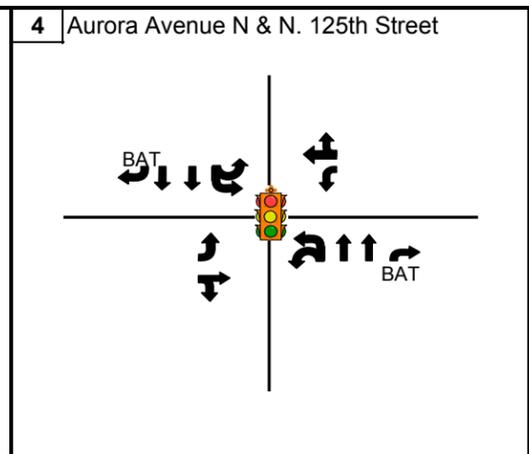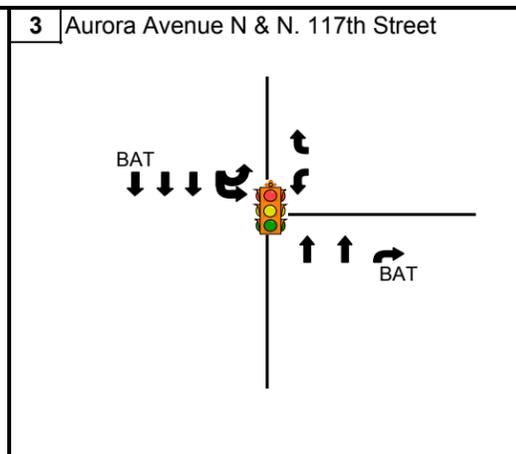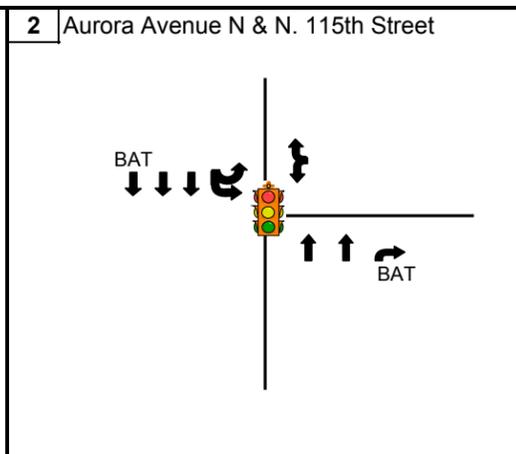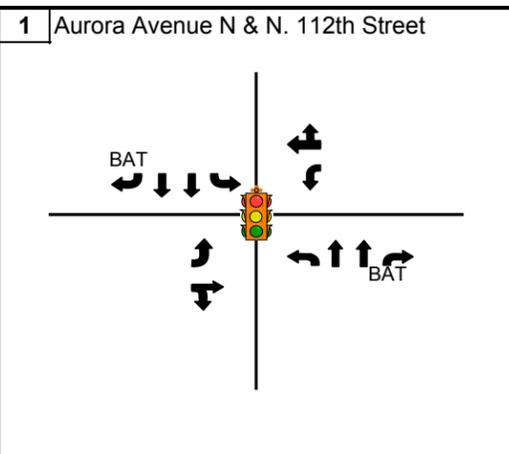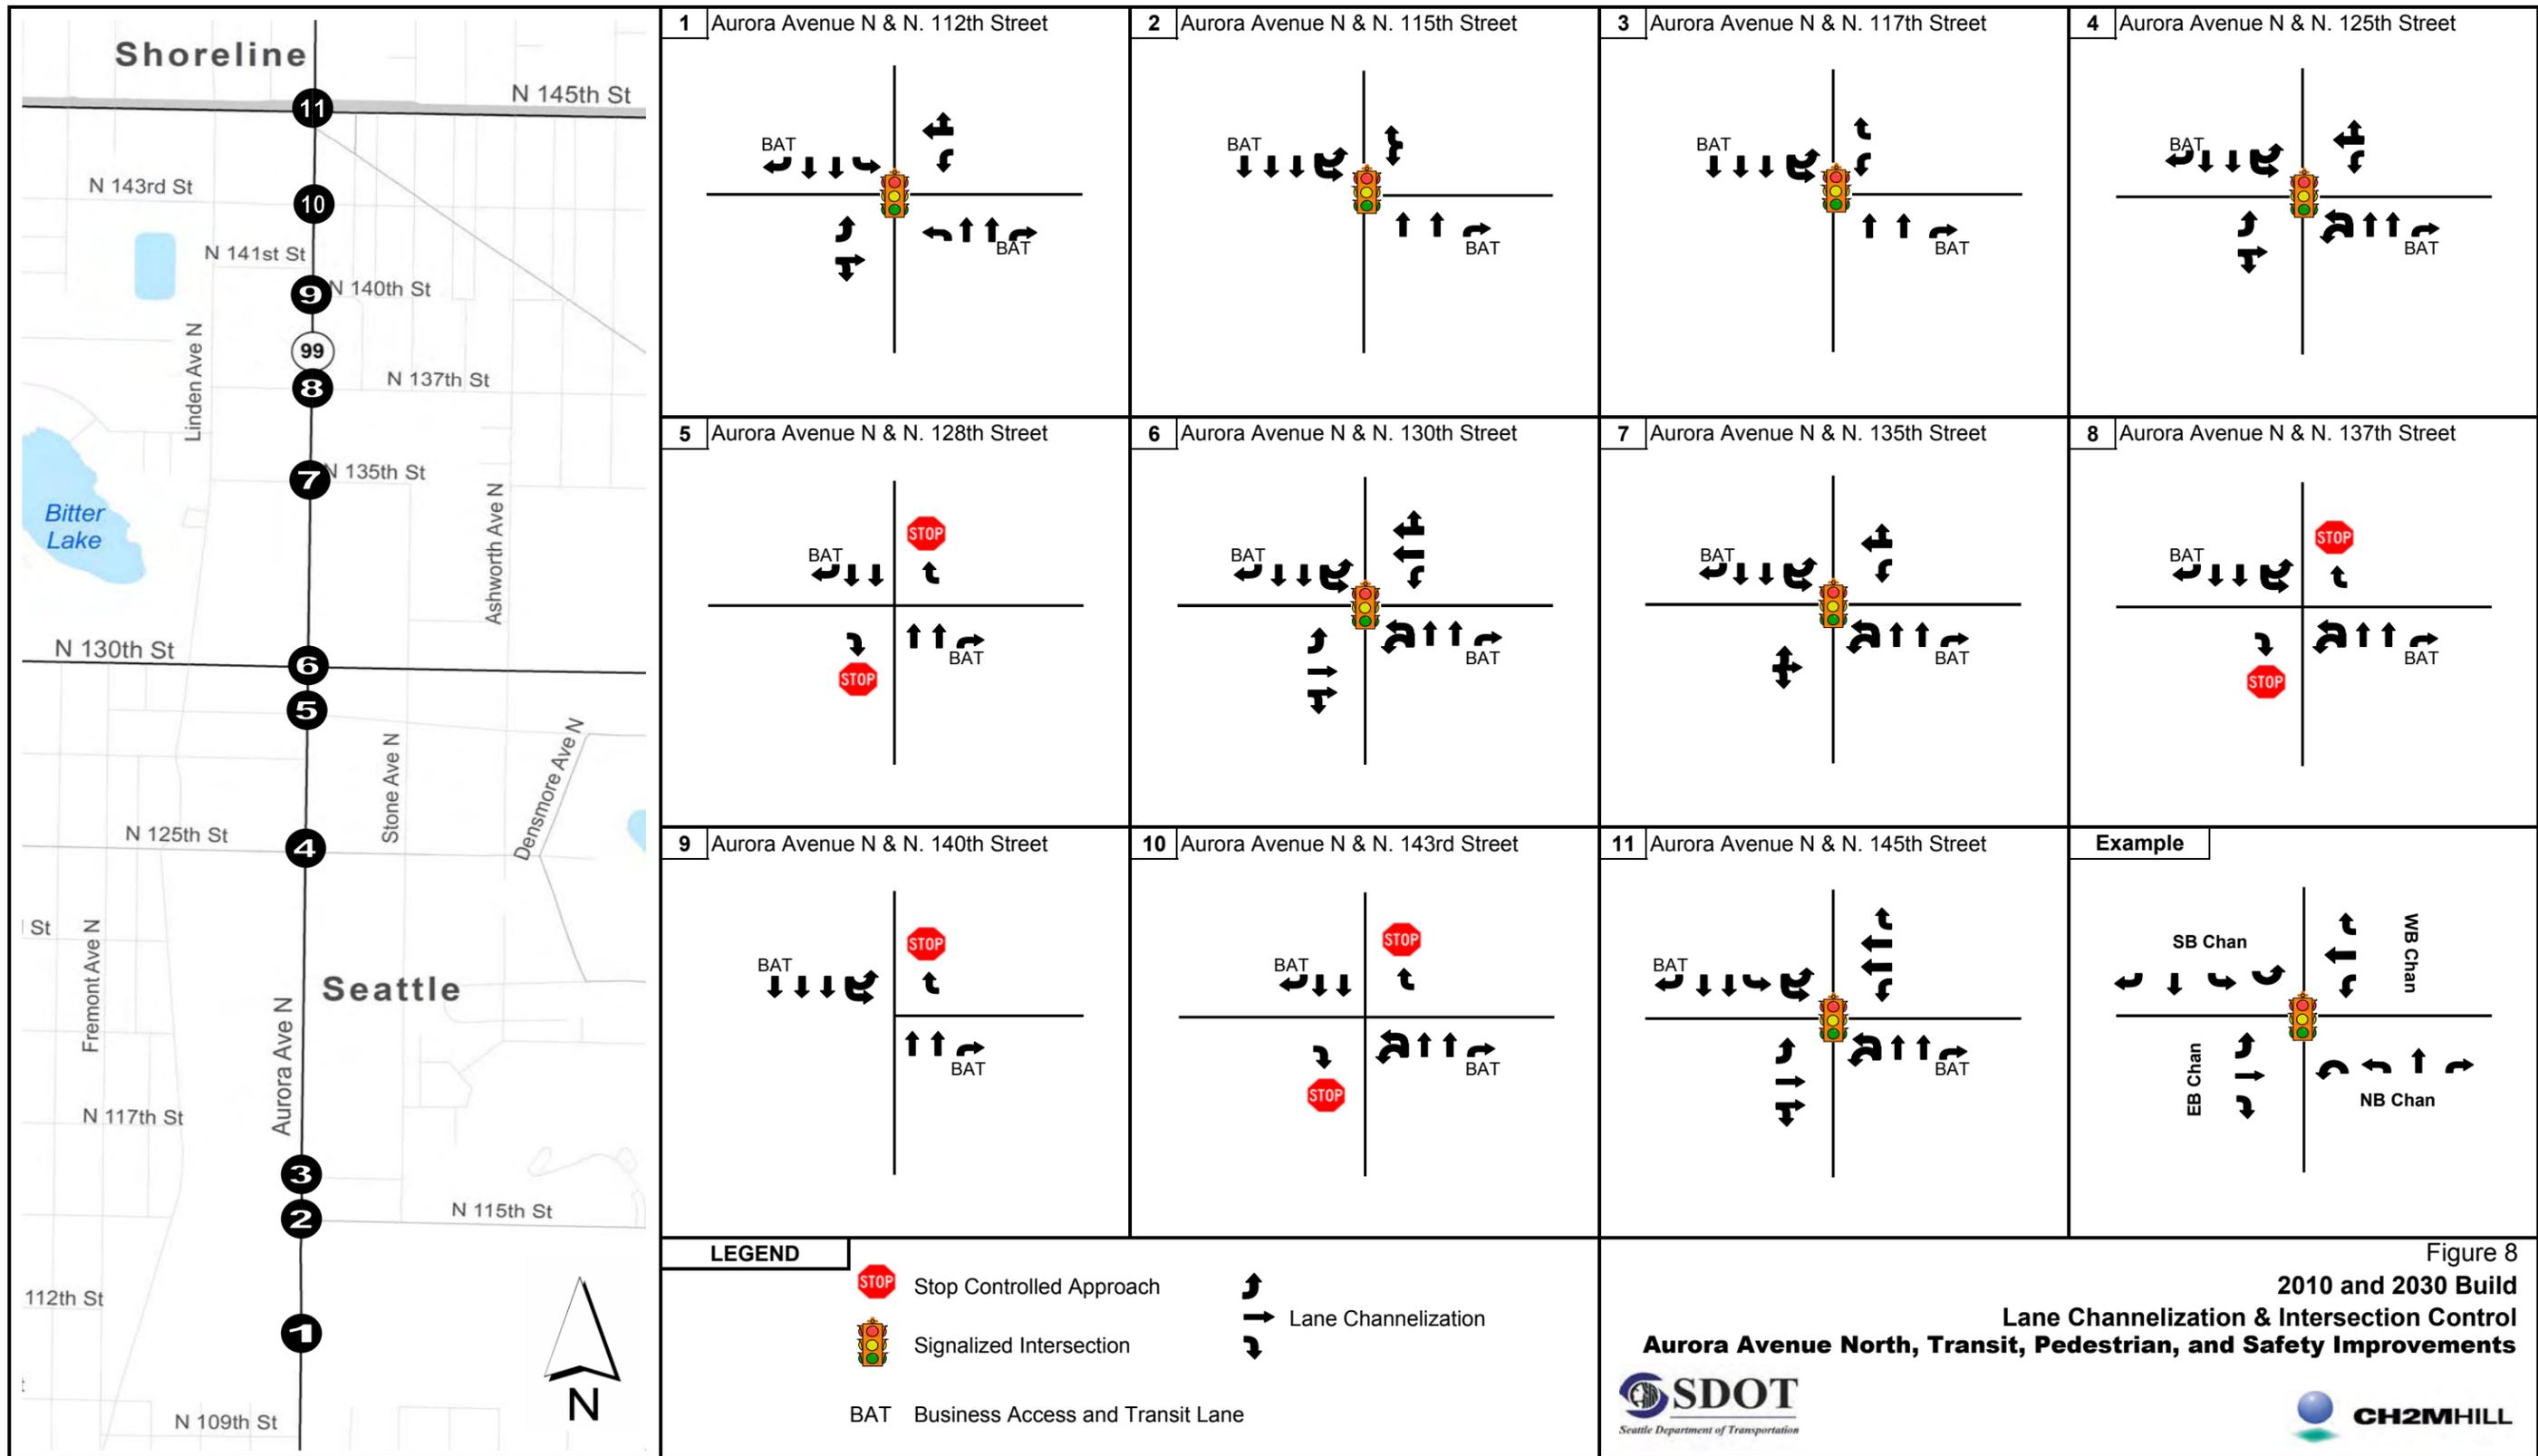

Appendix A

VEHICLE VOLUME SUMMARY

CITY OF SEATTLE
DEPARTMENT OF TRANSPORTATION

LOCATION AURORA AVE N @ N 145 ST TIME 7:45-8:45

DATE 6-7-05


AM PEAK

DAY TUESDAY

WEATHER OVERCAST

PREPARED BY JR

COUNTED BY JR

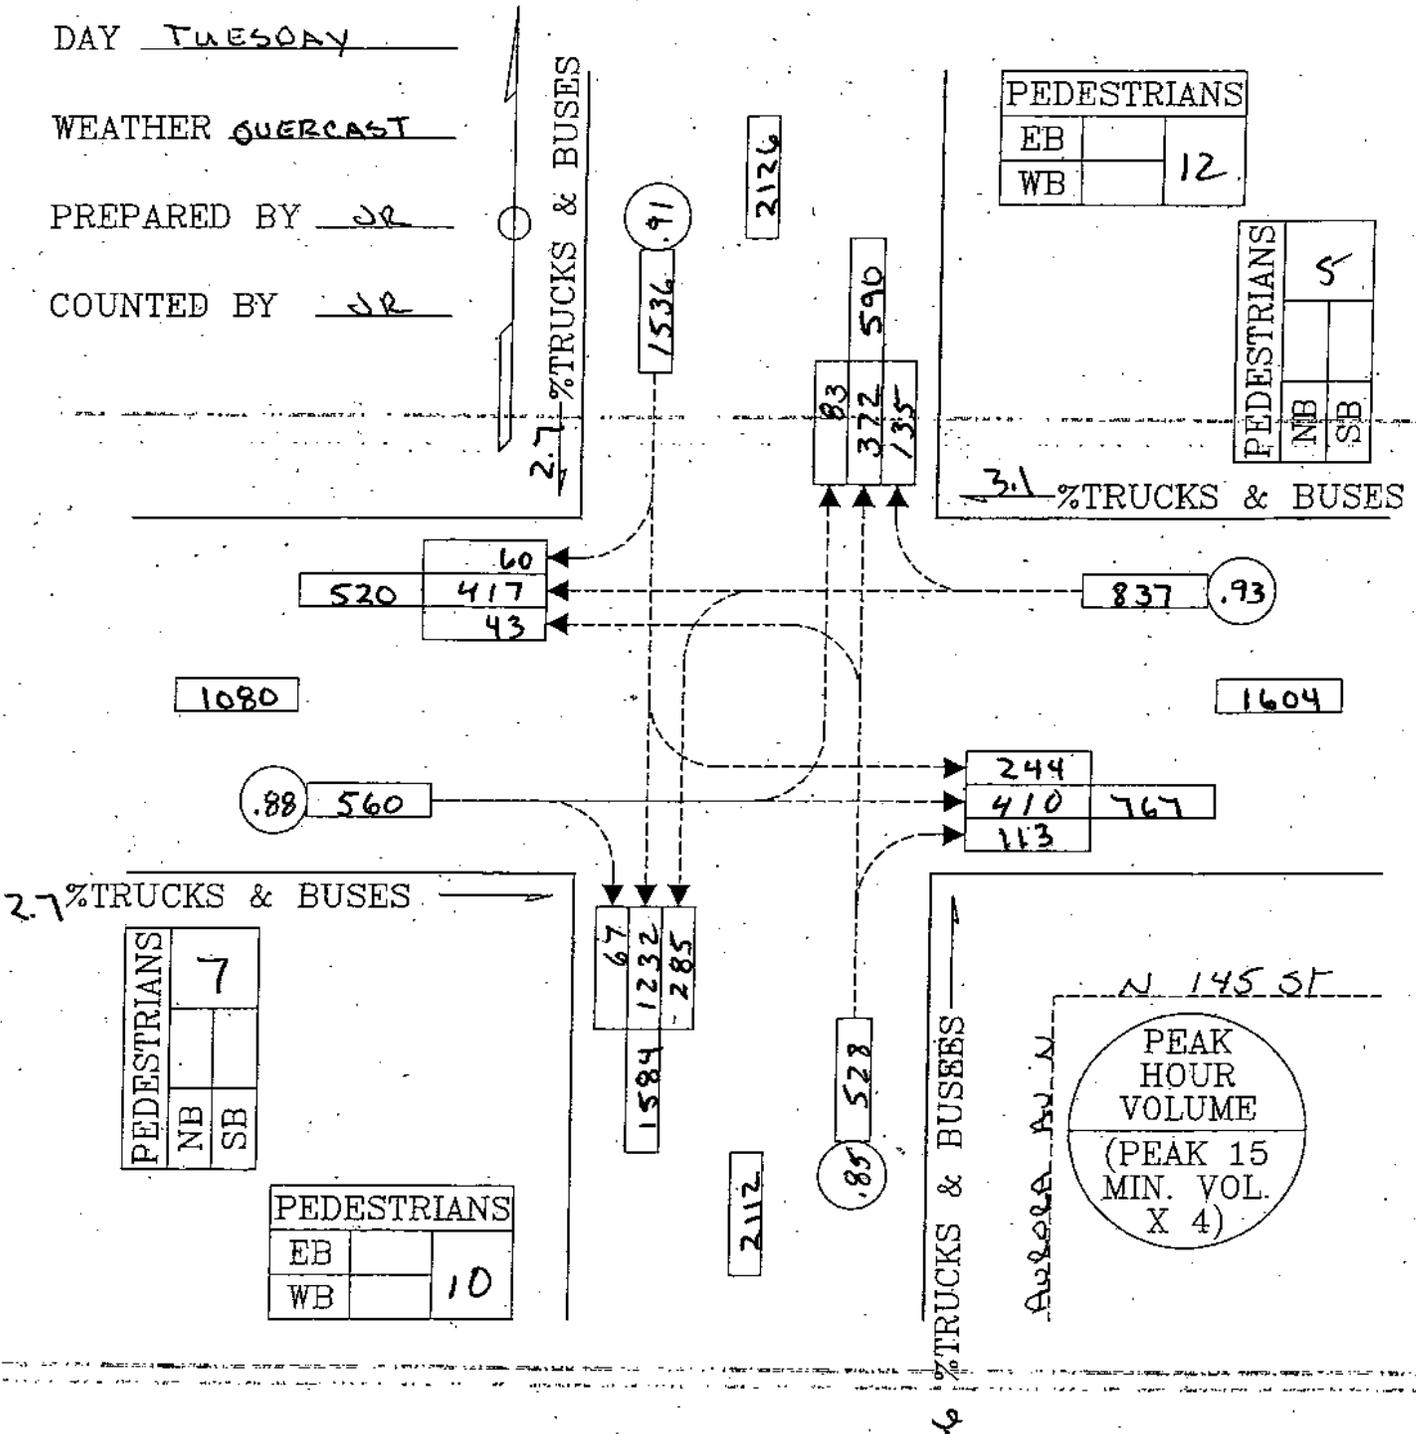

VEHICLE VOLUME SUMMARY

CITY OF SEATTLE
DEPARTMENT OF TRANSPORTATION

LOCATION AURORA AVENUE & N 135 ST TIME 7:30-8:30


DATE 6-7-05 AM PEAK

DAY TUESDAY

WEATHER Cloudy

PREPARED BY JR

COUNTED BY JH

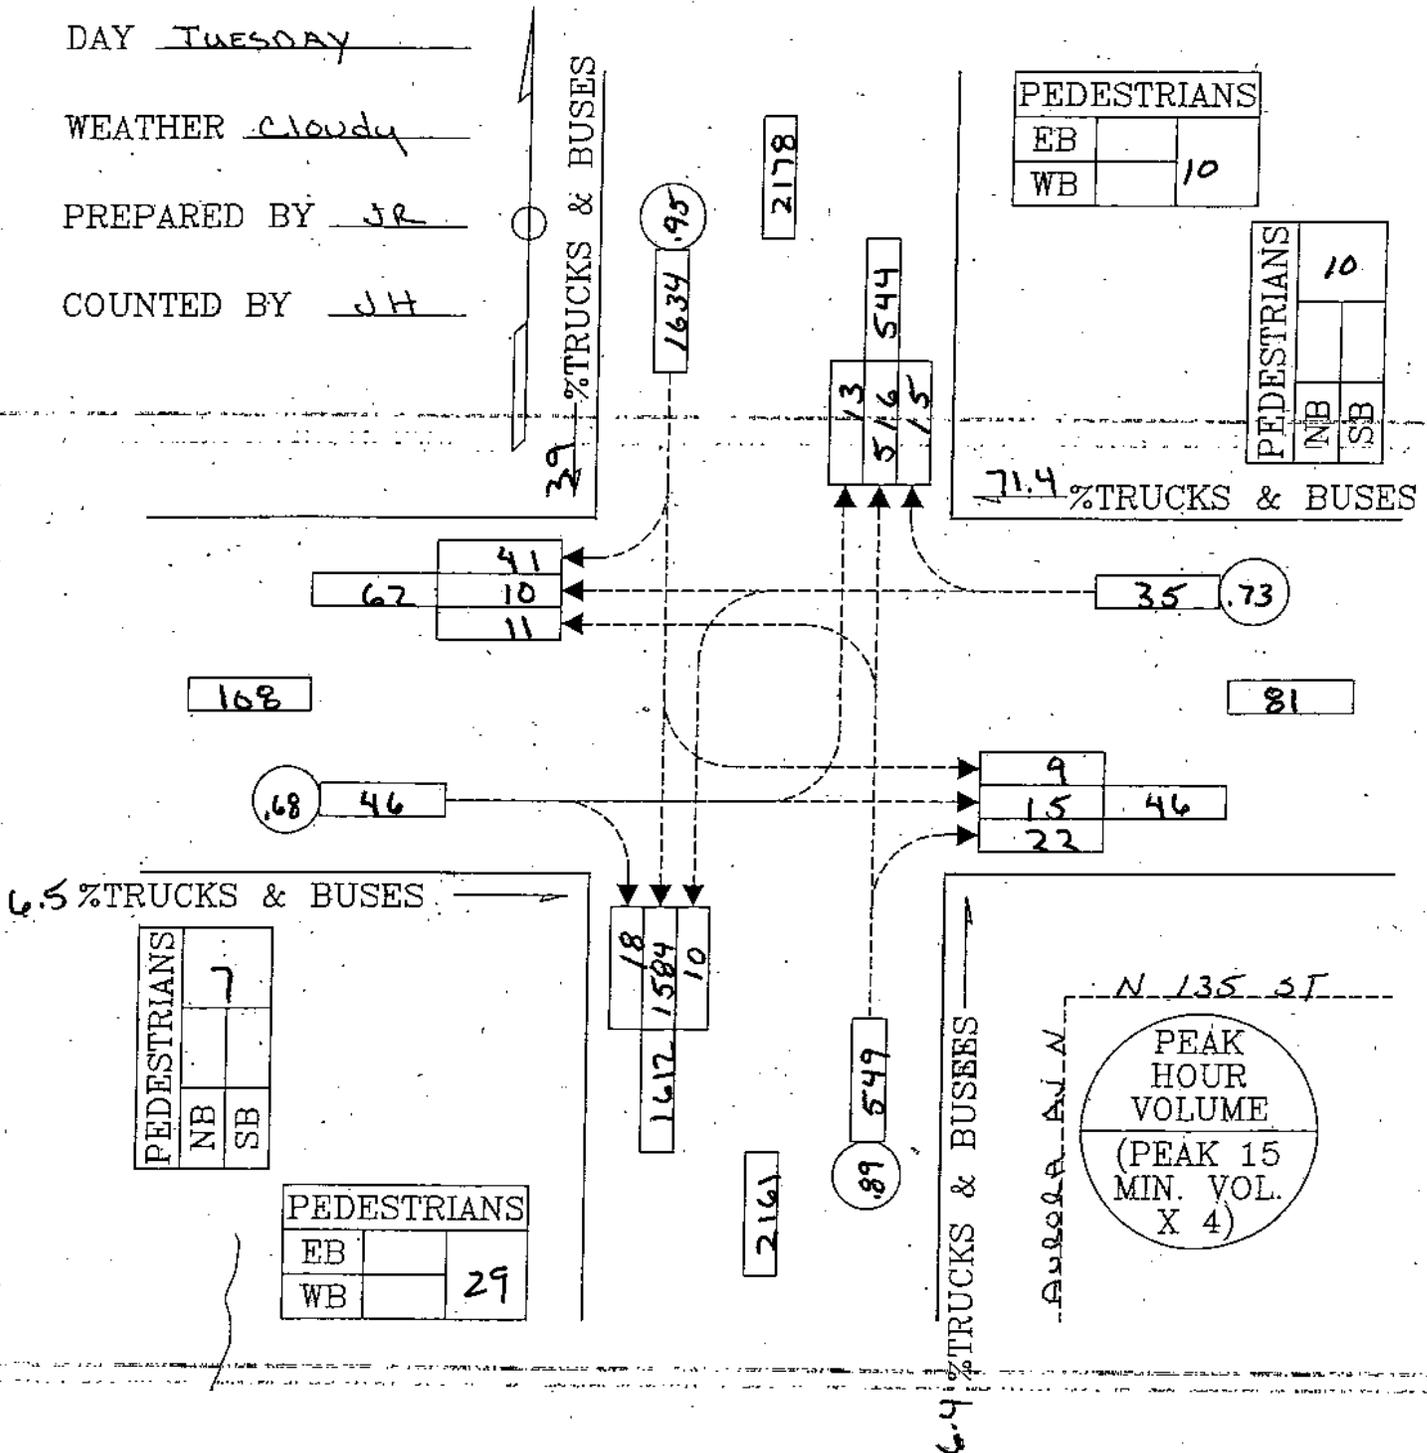

VEHICLE VOLUME SUMMARY

CITY OF SEATTLE
DEPARTMENT OF TRANSPORTATION

LOCATION Aurora Aven E N 130 St TIME 7:15-8:15

DATE 6-8-05


AM PEAK

DAY WEDNESDAY

WEATHER CLOUDS

PREPARED BY JR

COUNTED BY WR

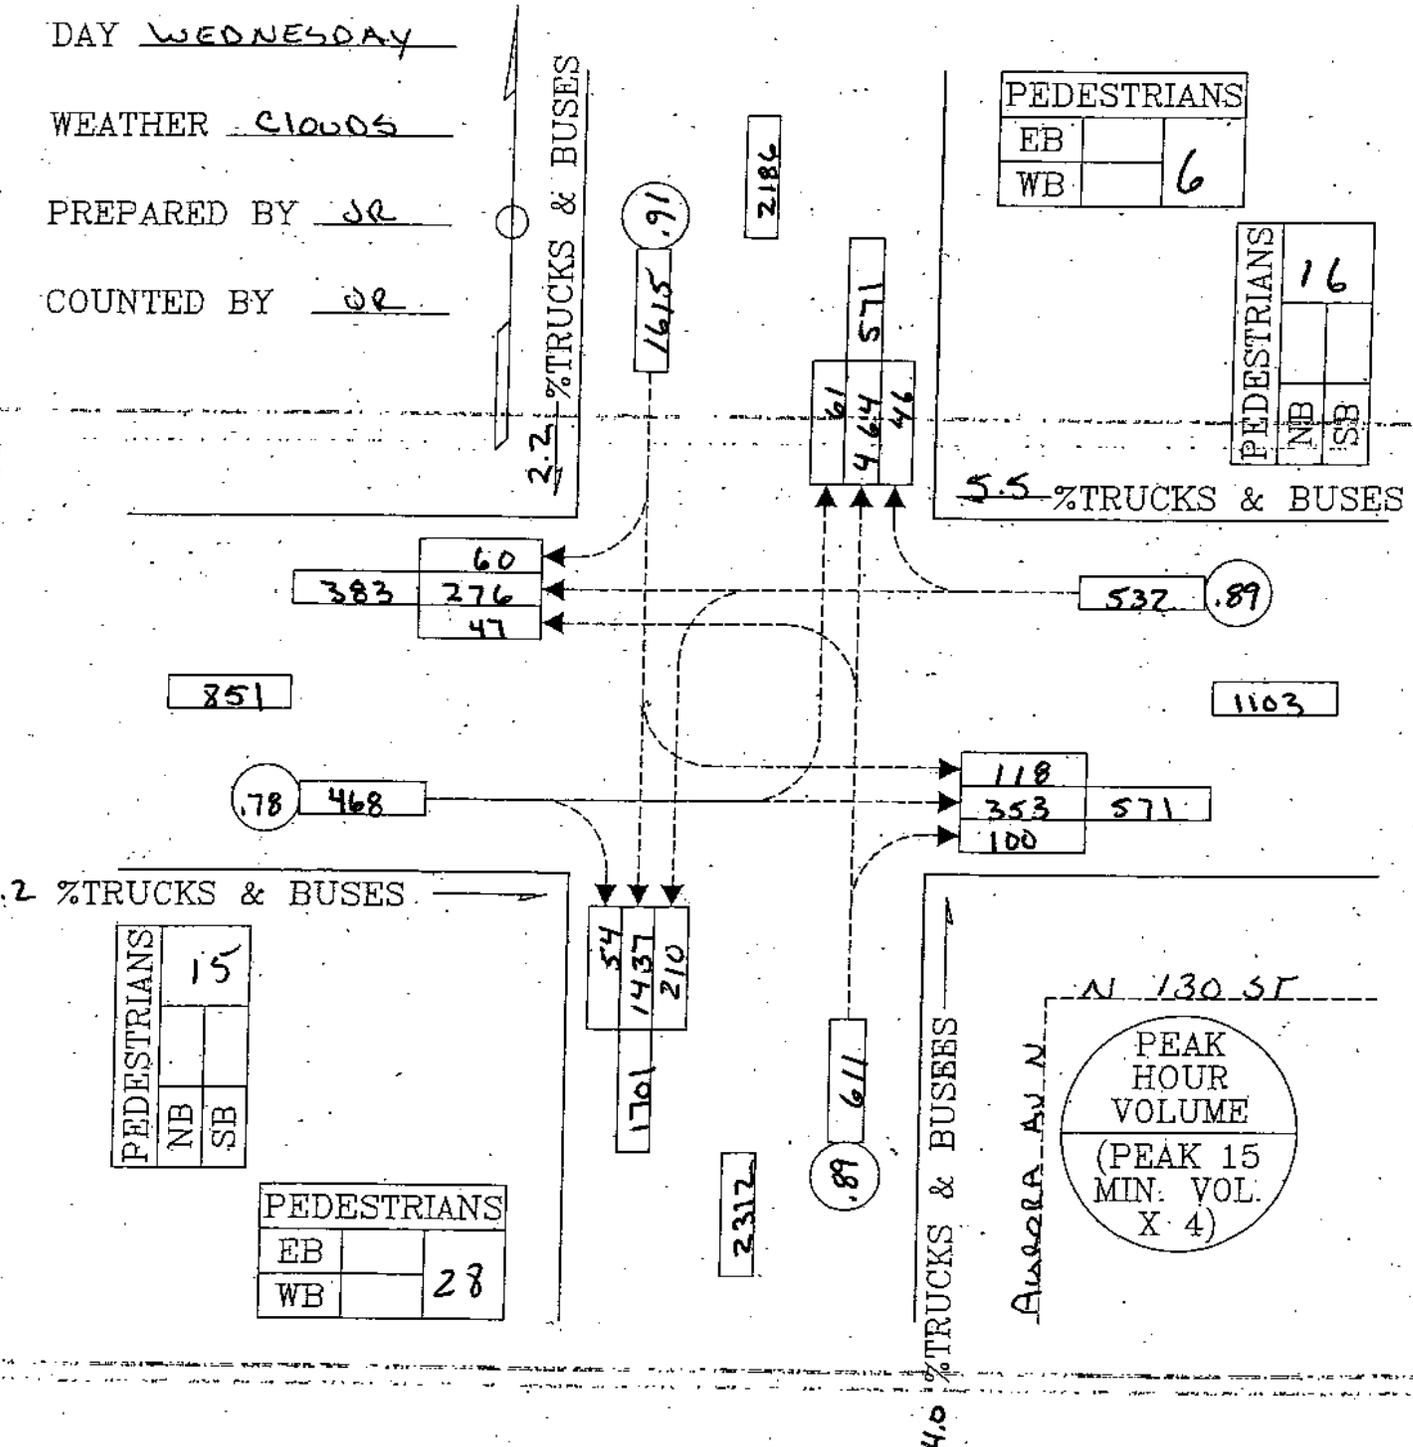

VEHICLE VOLUME SUMMARY

CITY OF SEATTLE
DEPARTMENT OF TRANSPORTATION

LOCATION Aurora Ave N @ N 117 St TIME 8:00-9:00

DATE 6-9-05


AM PEAK

DAY THURSDAY

WEATHER Sunny

PREPARED BY SR

COUNTED BY SR

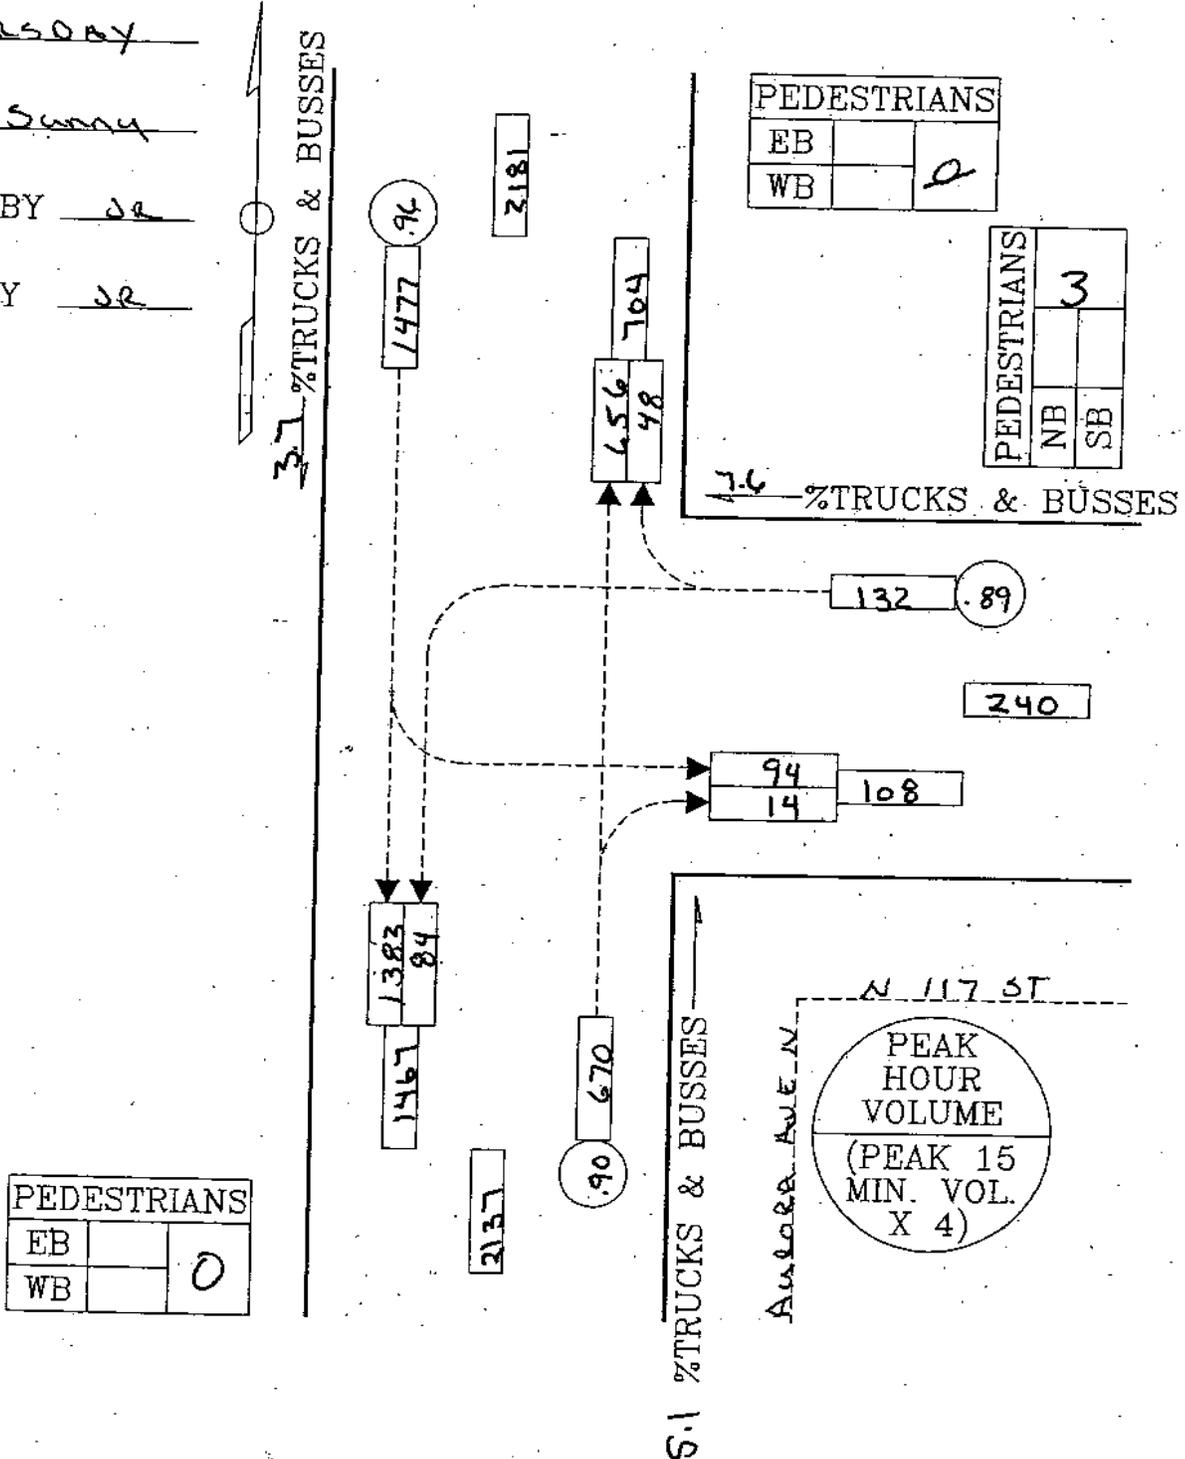

VEHICLE VOLUME SUMMARY

CITY OF SEATTLE
DEPARTMENT OF TRANSPORTATION

LOCATION Aurora Ave N @ N 117 St TIME 4:00-5:00

DATE 6-9-05


PM PEAK

DAY THURSDAY

WEATHER Sunny

PREPARED BY se

COUNTED BY se

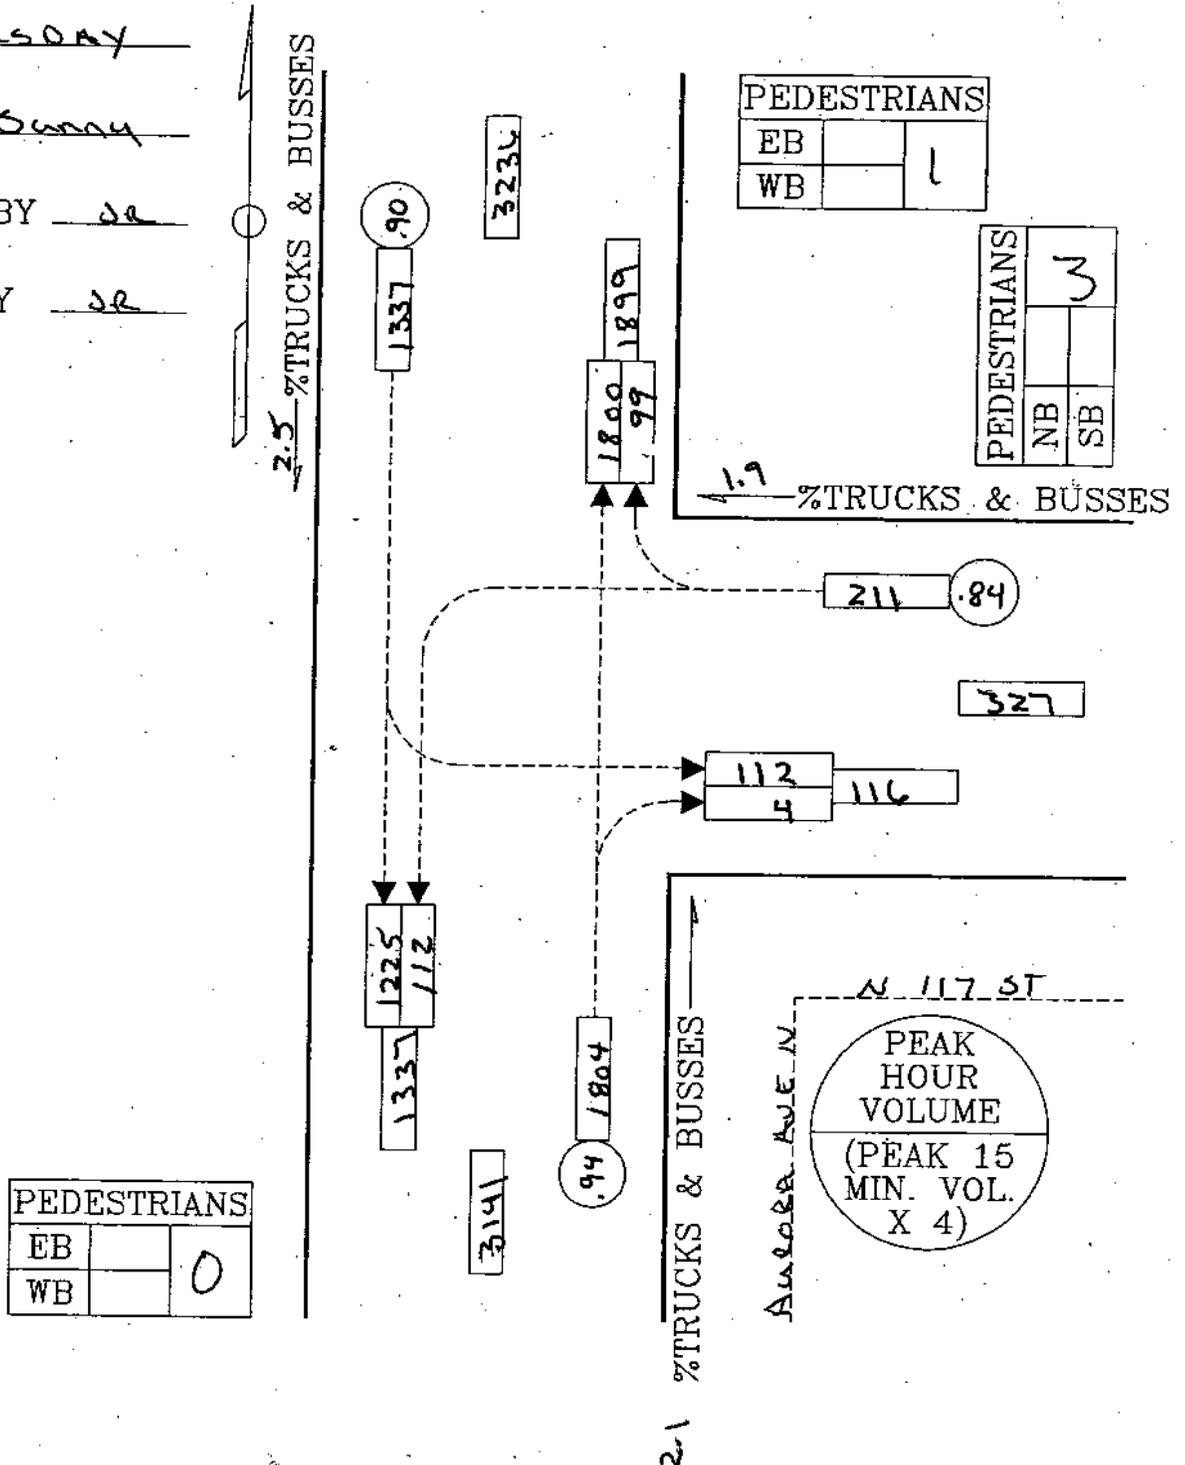

VEHICLE VOLUME SUMMARY

CITY OF SEATTLE
DEPARTMENT OF TRANSPORTATION

LOCATION AURORA AVE N & N 115 ST TIME 7:15-8:15

DATE 6-23-05


AM PEAK

DAY THURSDAY

WEATHER CLEAR

PREPARED BY JL

COUNTED BY WH

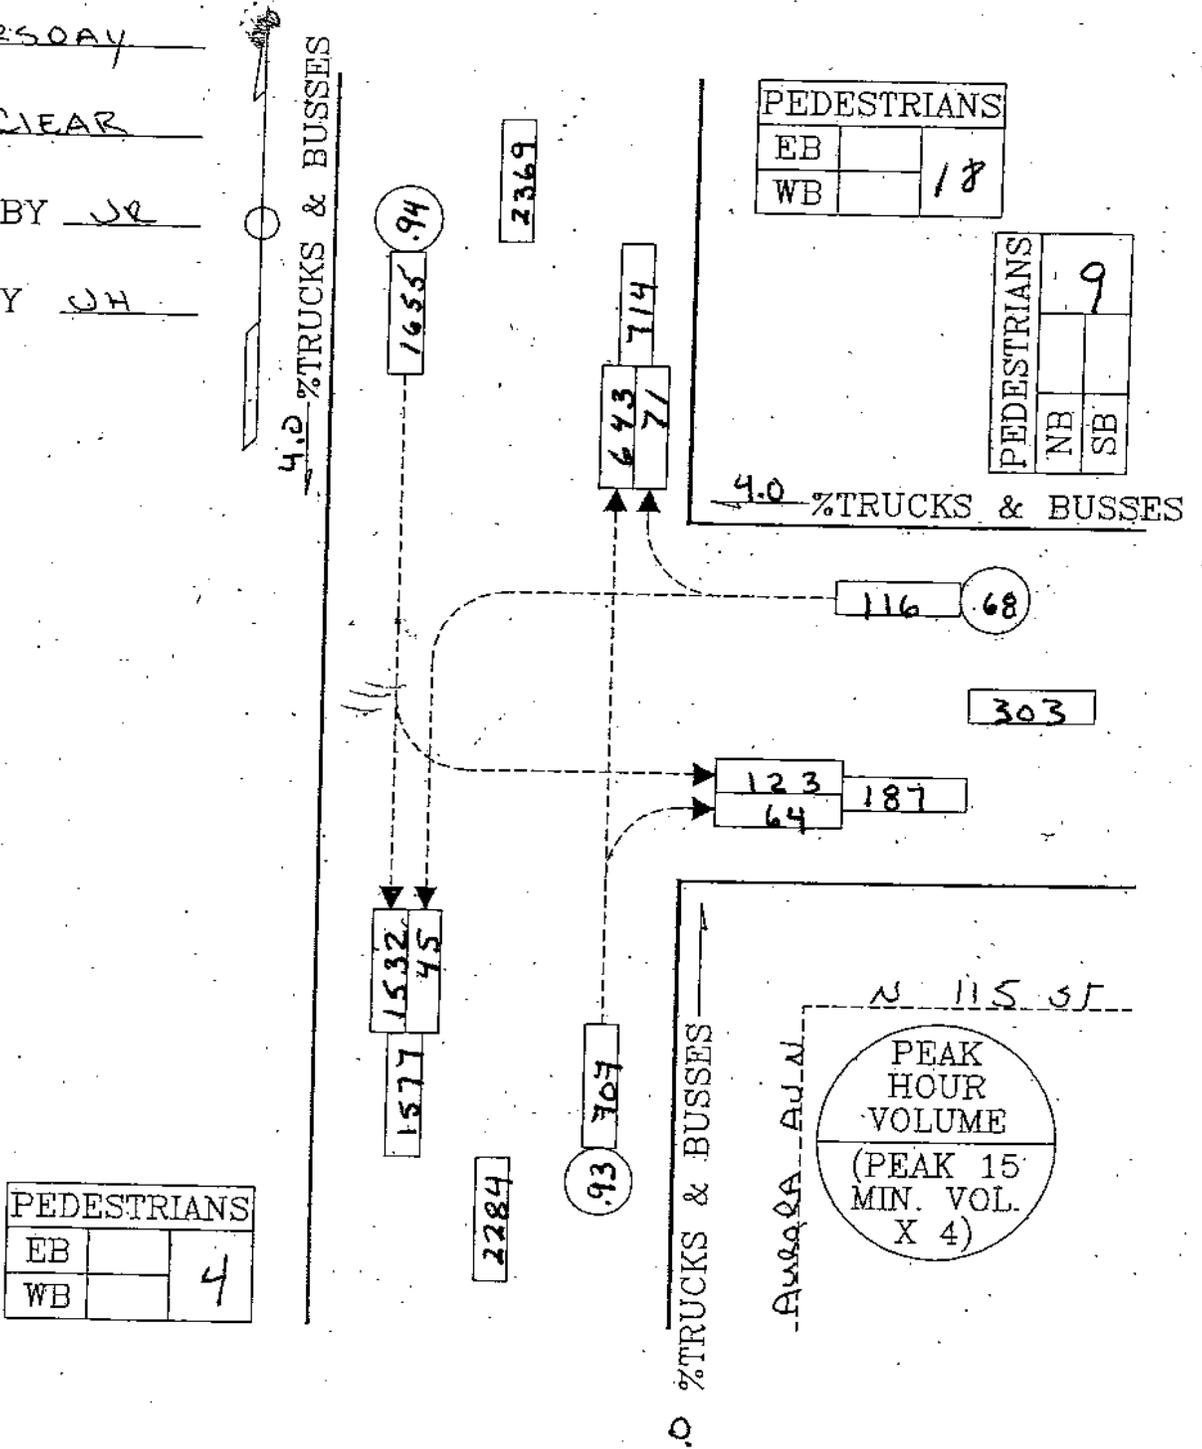

PEDESTRIANS		
EB		4
WB		

PEDESTRIANS		
EB		
WB		18

PEDESTRIANS		
NB		9
SB		

PEAK HOUR VOLUME
(PEAK 15 MIN. VOL. X 4)

TC²

Traffic Count Consultants, Inc.

13623 184th Avenue NE, Woodinville, WA 98072

Phone: (425) 861-8866 FAX: (425) 861-8877

Vehicle Volume Summary

Intersection: Aurora Ave N @ N 115th St
 Location: Seattle

Date of Count: Thu 12.5.02
 Checked By: FH

Time Interval Ending at	From North on (SB) Aurora Ave N				From South on (NB) Aurora Ave N				From East on (WB) N 115th St				From West on (EB) n/a				Interval Total
	T	L	S	R	T	L	S	R	T	L	S	R	T	L	S	R	
4:15 P	3	18	274	0	7	0	341	18	5	21	0	49	0	0	0	0	721
4:30 P	5	17	286	0	9	0	441	16	1	17	0	37	0	0	0	0	814
4:45 P	2	16	290	0	5	0	399	19	1	20	0	39	0	0	0	0	783
5:00 P	2	22	260	0	6	0	387	13	3	21	0	38	0	0	0	0	741
5:15 P	1	17	256	0	2	0	410	20	1	21	0	36	0	0	0	0	760
5:30 P	2	19	290	0	9	0	353	23	2	18	0	39	0	0	0	0	742
5:45 P	1	17	228	0	6	0	382	16	0	30	0	32	0	0	0	0	713
6:00 P	3	18	285	0	6	0	342	16	1	21	0	30	0	0	0	0	712
6:15 P	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
6:30 P	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
6:45 P	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7:00 P	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Total Survey	19	144	2167	0	50	0	3065	141	14	169	0	300	0	0	0	0	5886

4:15 P to 6:15 P Peak Hour Summary																	
Total	10	72	1092	0	22	0	1637	68	6	79	0	150	0	0	0	0	3098
Approach	1184			1705			229			0			3098				
%HV	1%			1%			3%			n/a			1%				
PHF	0.95			0.93			0.97			n/a			0.95				

Legend:
 T= Number of heavy vehicles (greater than 4 wheels)
 L= Left-Turn
 S= Straight
 R= Right-Turn
 HV= Heavy Vehicles
 PHF= Peak hour Factor (Peak hour volume / (4*Highest 15 minutes))

Prepared For: TSI

K02u123-005p

VEHICLE VOLUME SUMMARY

CITY OF SEATTLE
DEPARTMENT OF TRANSPORTATION

LOCATION AURORA AV N & N 125 ST TIME 7:15- 8:15 AM

DATE 6-1-05


AM PEAK HR

DAY WEDNESDAY

WEATHER OVERCAST

PREPARED BY JE

COUNTED BY JE

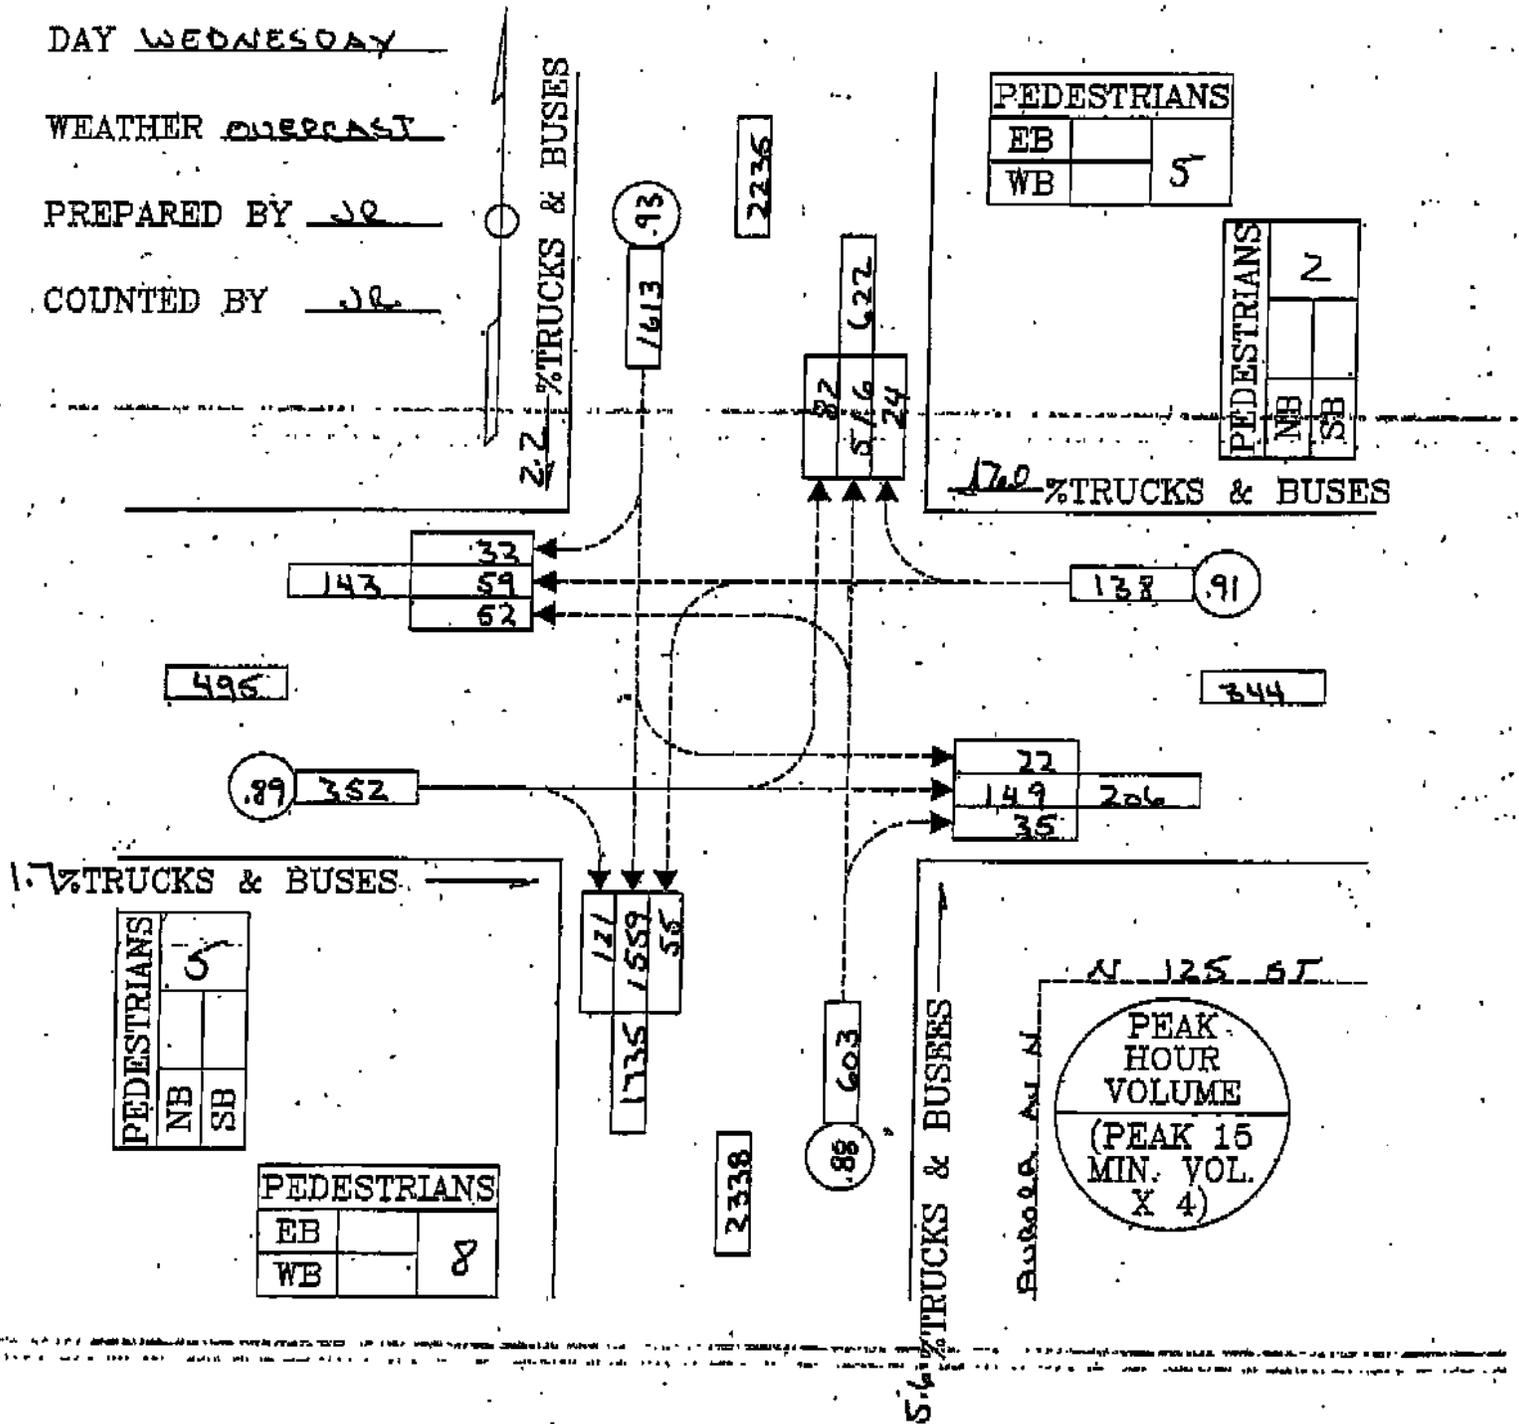

VEHICLE VOLUME SUMMARY

CITY OF SEATTLE
DEPARTMENT OF TRANSPORTATION

LOCATION: AURORA AV N E N 125 ST TIME 4:45-5:45

DATE 6-1-05


PM PEAK HR

DAY WEDNESDAY

WEATHER CND

PREPARED BY JR

COUNTED BY JR

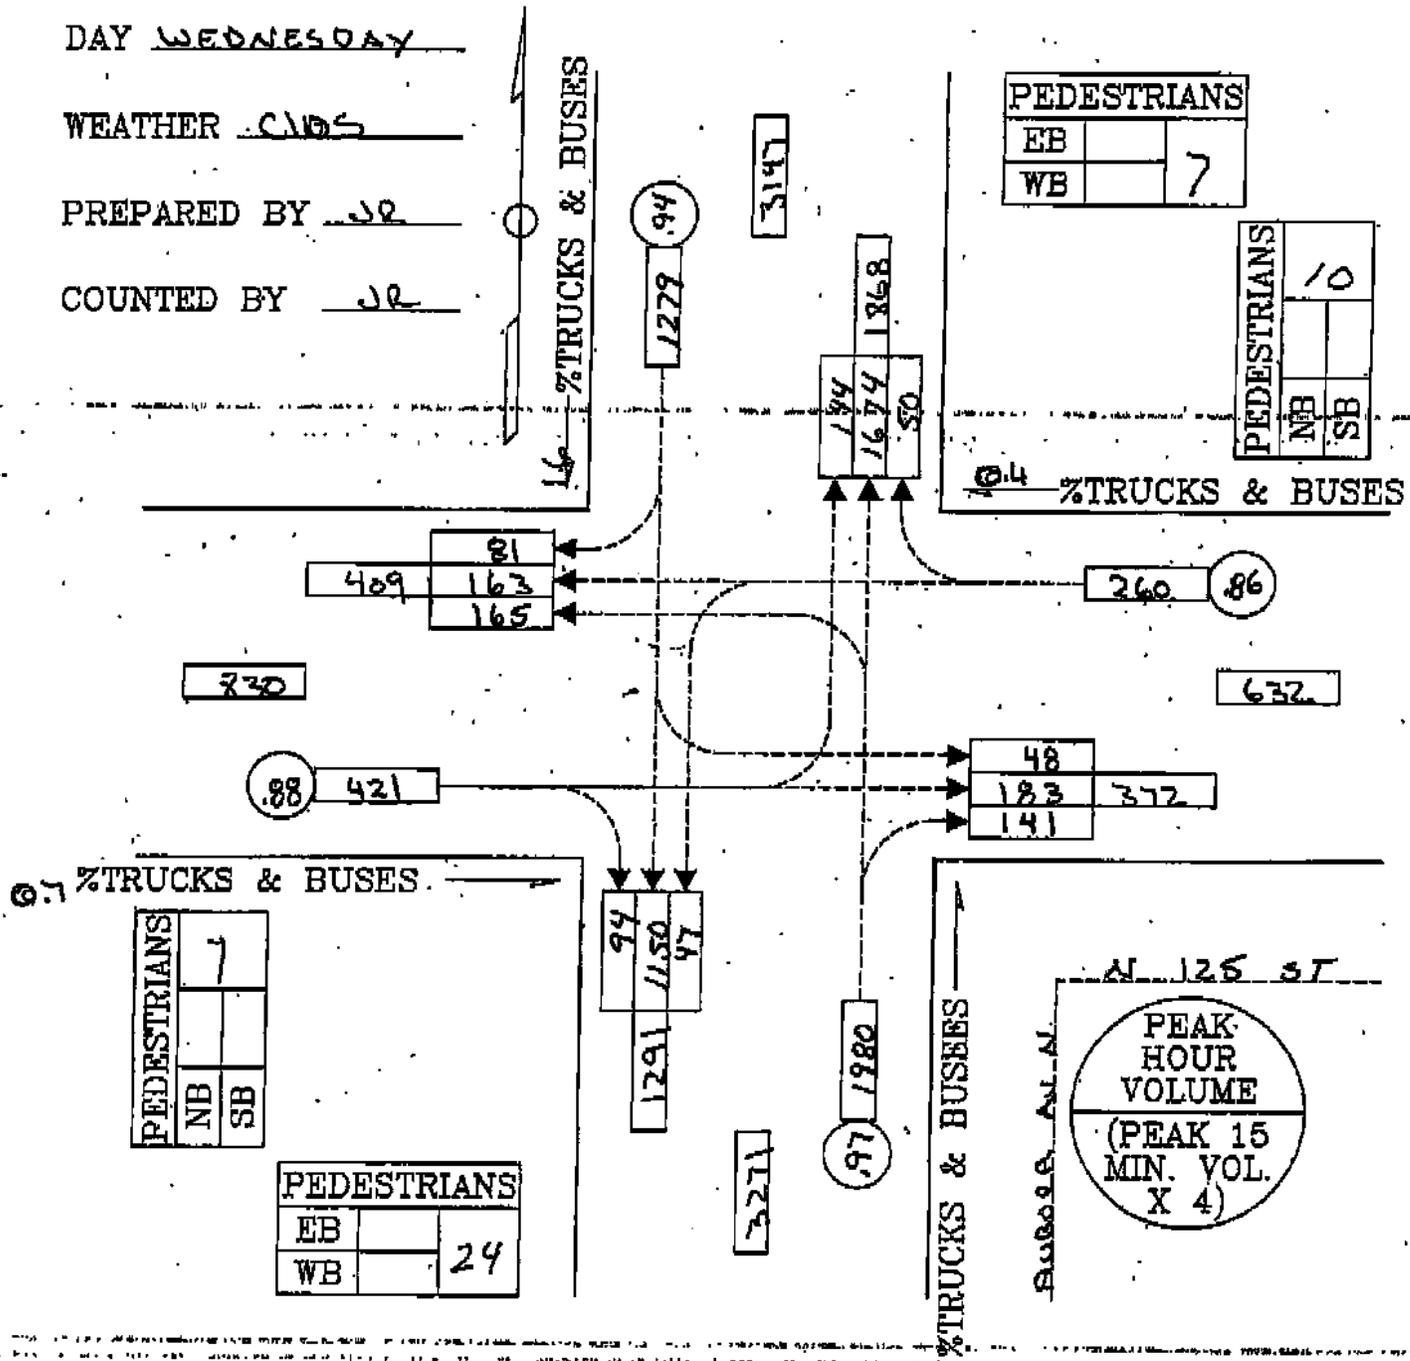

TC² **Traffic Count Consultants, Inc.** 13623 184th Ave NE, Woodinville, WA 98072
 Phone: (425) 861-8866 FAX: (425) 861-8877

Vehicle Volume Summary

Intersection: Aurora Avenue N @ N 130th Street Date of Count: Thu 12.5.02
 Location: Seattle Checked By: FH

Time Interval Ending at	From North on (SB) Aurora Avenue N				From South on (NB) Aurora Avenue N				From East on (WB) N 130th Street				From West on (EB) N 130th Street				Interval Total
	T	L	S	R	T	L	S	R	T	L	S	R	T	L	S	R	
4:30 P	7	41	238	21	3	28	363	35	1	35	90	30	4	26	50	19	874
4:45 P	6	62	217	19	3	19	363	34	8	56	129	41	3	38	91	23	1092
5:00 P	6	48	255	14	3	24	395	38	6	43	111	30	3	45	89	16	1108
5:15 P	3	39	176	25	4	32	367	28	0	49	136	31	2	40	62	17	1002
5:30 P	1	43	230	28	1	24	407	34	1	40	96	31	3	41	82	13	1069
5:45 P	0	55	234	25	1	37	356	23	1	44	139	29	6	37	84	14	1077
6:00 P	3	43	180	16	1	21	349	28	2	41	116	43	2	63	82	13	995
6:15 P	5	46	215	23	2	23	381	24	0	45	105	40	0	29	83	11	1025
6:30 P	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
6:45 P	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7:00 P	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7:15 P	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Total Survey	31	377	1745	171	18	206	2981	244	19	353	922	275	28	319	623	126	8342

4:30 P to 5:30 P Peak Hour Summary																	
Total	16	192	878	86	11	99	1532	134	15	188	472	133	11	184	324	69	4271
Approach	1156						1785		793				567				4271
%HV	1%						1%		2%				2%				1%
PHF	0.91						0.95		0.88				0.92				0.96

Legend:
 T= Number of heavy vehicles (greater than 4 wheels)
 L= Left-Turn
 S= Straight
 R= Right-Turn
 HV= Heavy Vehicles
 PHF= Peak hour Factor (Peak hour volume / (4*Highest 15 minutes))

TC²

Traffic Count Consultants, Inc.

13623 184th Ave NE, Woodinville, WA 98072

Phone: (425) 861-8866 FAX: (425) 861-8877

Vehicle Volume Summary

Intersection: Aurora Avenue N @ N 145th Street
 Location: Seattle

Date of Count: Tue 12.3.02
 Checked By: FH

Time Interval Ending at	From North on (SB) Aurora Avenue N				From South on (NB) Aurora Avenue N				From East on (WB) N 145th Street				From West on (EB) N 145th Street				Interval Total
	T	L	S	R	T	L	S	R	T	L	S	R	T	L	S	R	
4:15 P	4	58	174	20	2	17	315	46	6	43	117	28	0	53	127	22	1020
4:30 P	4	51	220	38	4	25	350	62	10	47	123	51	1	43	118	21	1149
4:45 P	1	68	218	12	5	11	340	55	3	52	108	62	1	44	126	19	1115
5:00 P	3	52	212	16	4	16	341	67	4	50	138	60	1	31	121	25	1129
5:15 P	3	76	189	16	2	20	322	49	1	45	123	72	2	48	130	14	1104
5:30 P	2	64	206	17	2	19	353	63	2	52	124	74	0	41	111	17	1141
5:45 P	1	50	224	23	5	17	372	51	1	50	100	79	1	55	95	9	1125
6:00 P	3	54	149	13	2	29	295	38	3	39	118	44	1	53	113	30	975
6:15 P	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
6:30 P	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
6:45 P	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7:00 P	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Total Survey	21	473	1592	155	26	154	2688	431	30	378	951	470	7	368	941	157	8758

4:45 P to 5:45 P Peak Hour Summary

Total	9	242	831	72	13	72	1388	230	8	197	485	285	4	175	457	65	4499
Approach	1145				1690				967				697				4499
%HV	1%				1%				1%				1%				1%
PHF	0.96				0.96				0.97				0.91				0.99

Legend:
 T= Number of heavy vehicles (greater than 4 wheels)
 L= Left-Turn
 S= Straight
 R= Right-Turn
 HV= Heavy Vehicles
 PHF= Peak hour Factor (Peak hour volume / (4*Highest 15 minutes))

Prepared For: TSI

K02u123-001p

VEHICLE VOLUME SUMMARY

CITY OF SEATTLE
DEPARTMENT OF TRANSPORTATION

LOCATION AURORA AV N + N 128 ST TIME 7:15 Am - 8:15 Am

DATE 7/01/03


AM PEAK HOUR

DAY TUESDAY

WEATHER CLDY / SUN

PREPARED BY RJR/JR

COUNTED BY JR

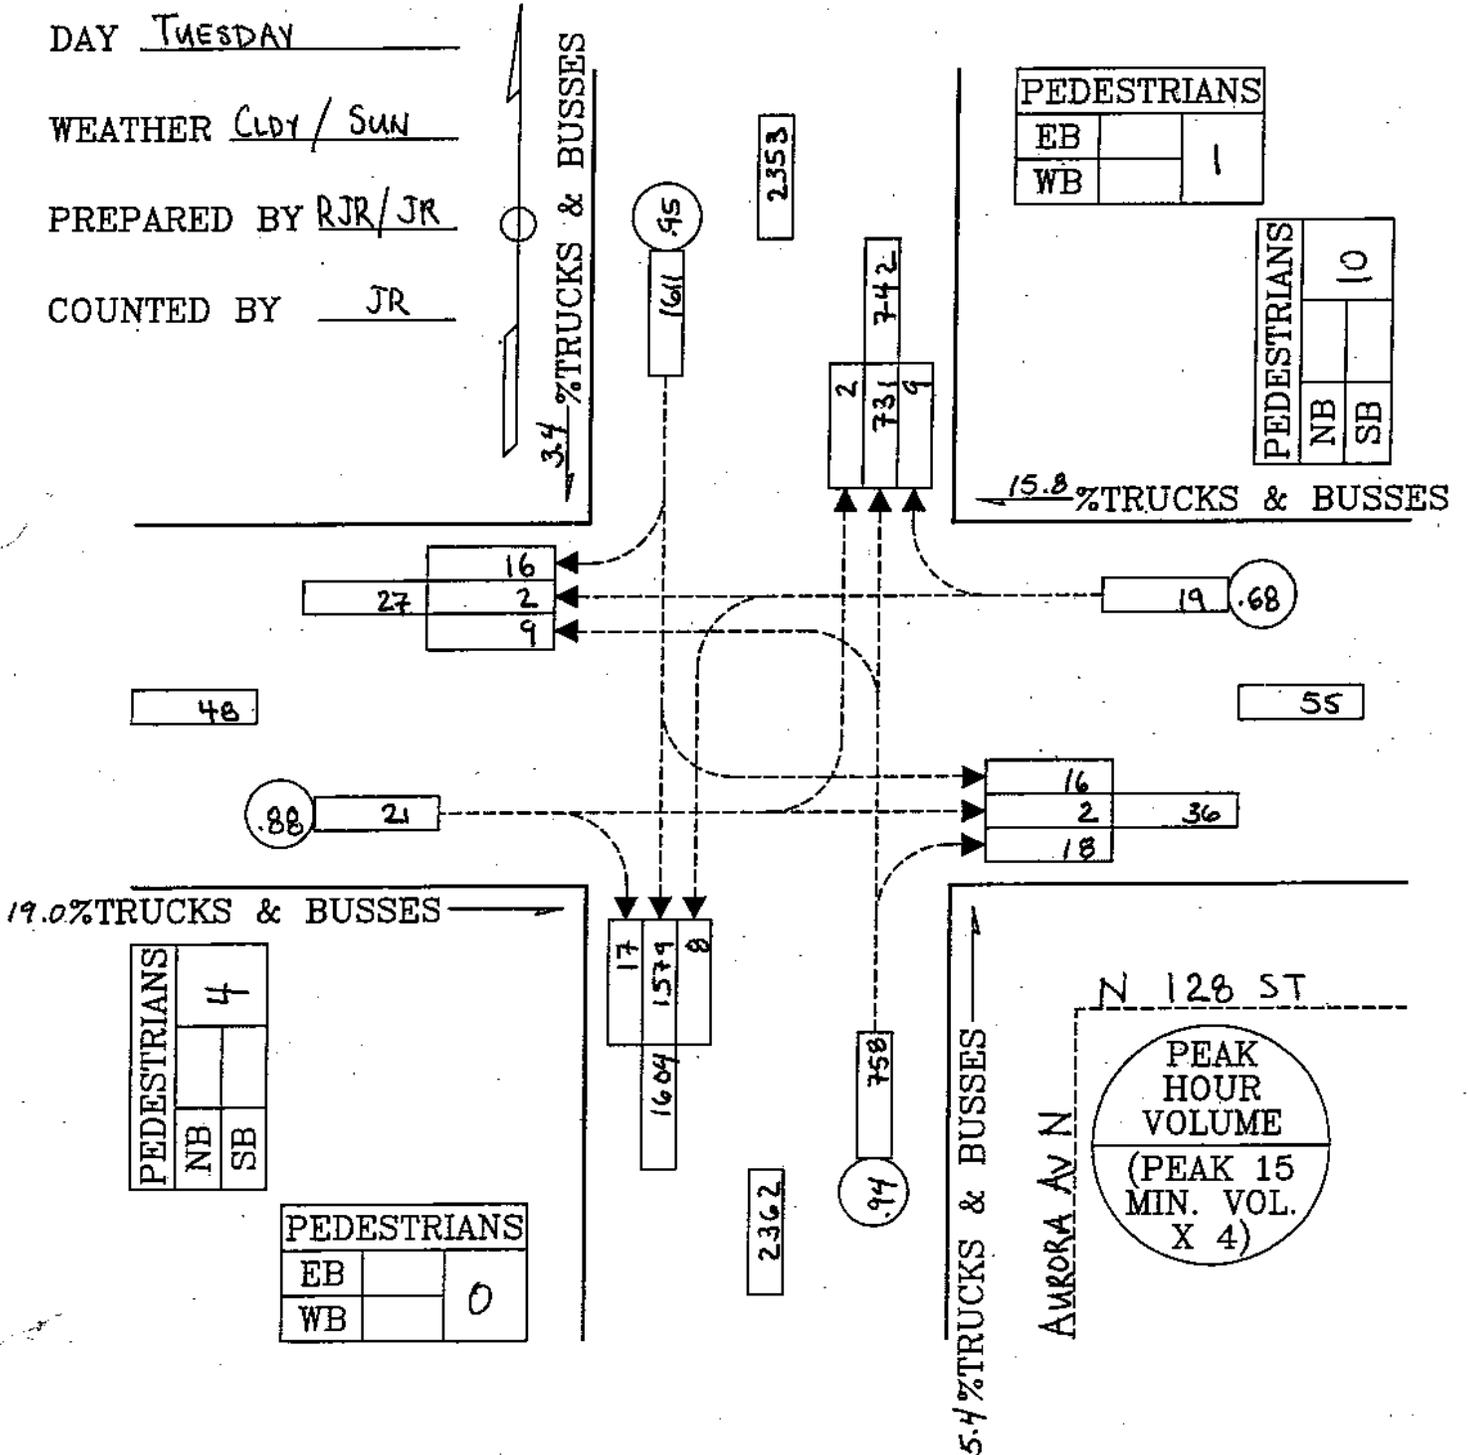

VEHICLE VOLUME SUMMARY

CITY OF SEATTLE
DEPARTMENT OF TRANSPORTATION

LOCATION AURORA AV N + N 128 ST

TIME 4:45 pm - 5:15 pm

DATE 7/01/03


PM PEAK HOUR

DAY TUESDAY

WEATHER CLDY / SUN

PREPARED BY RSR/JR

COUNTED BY JR

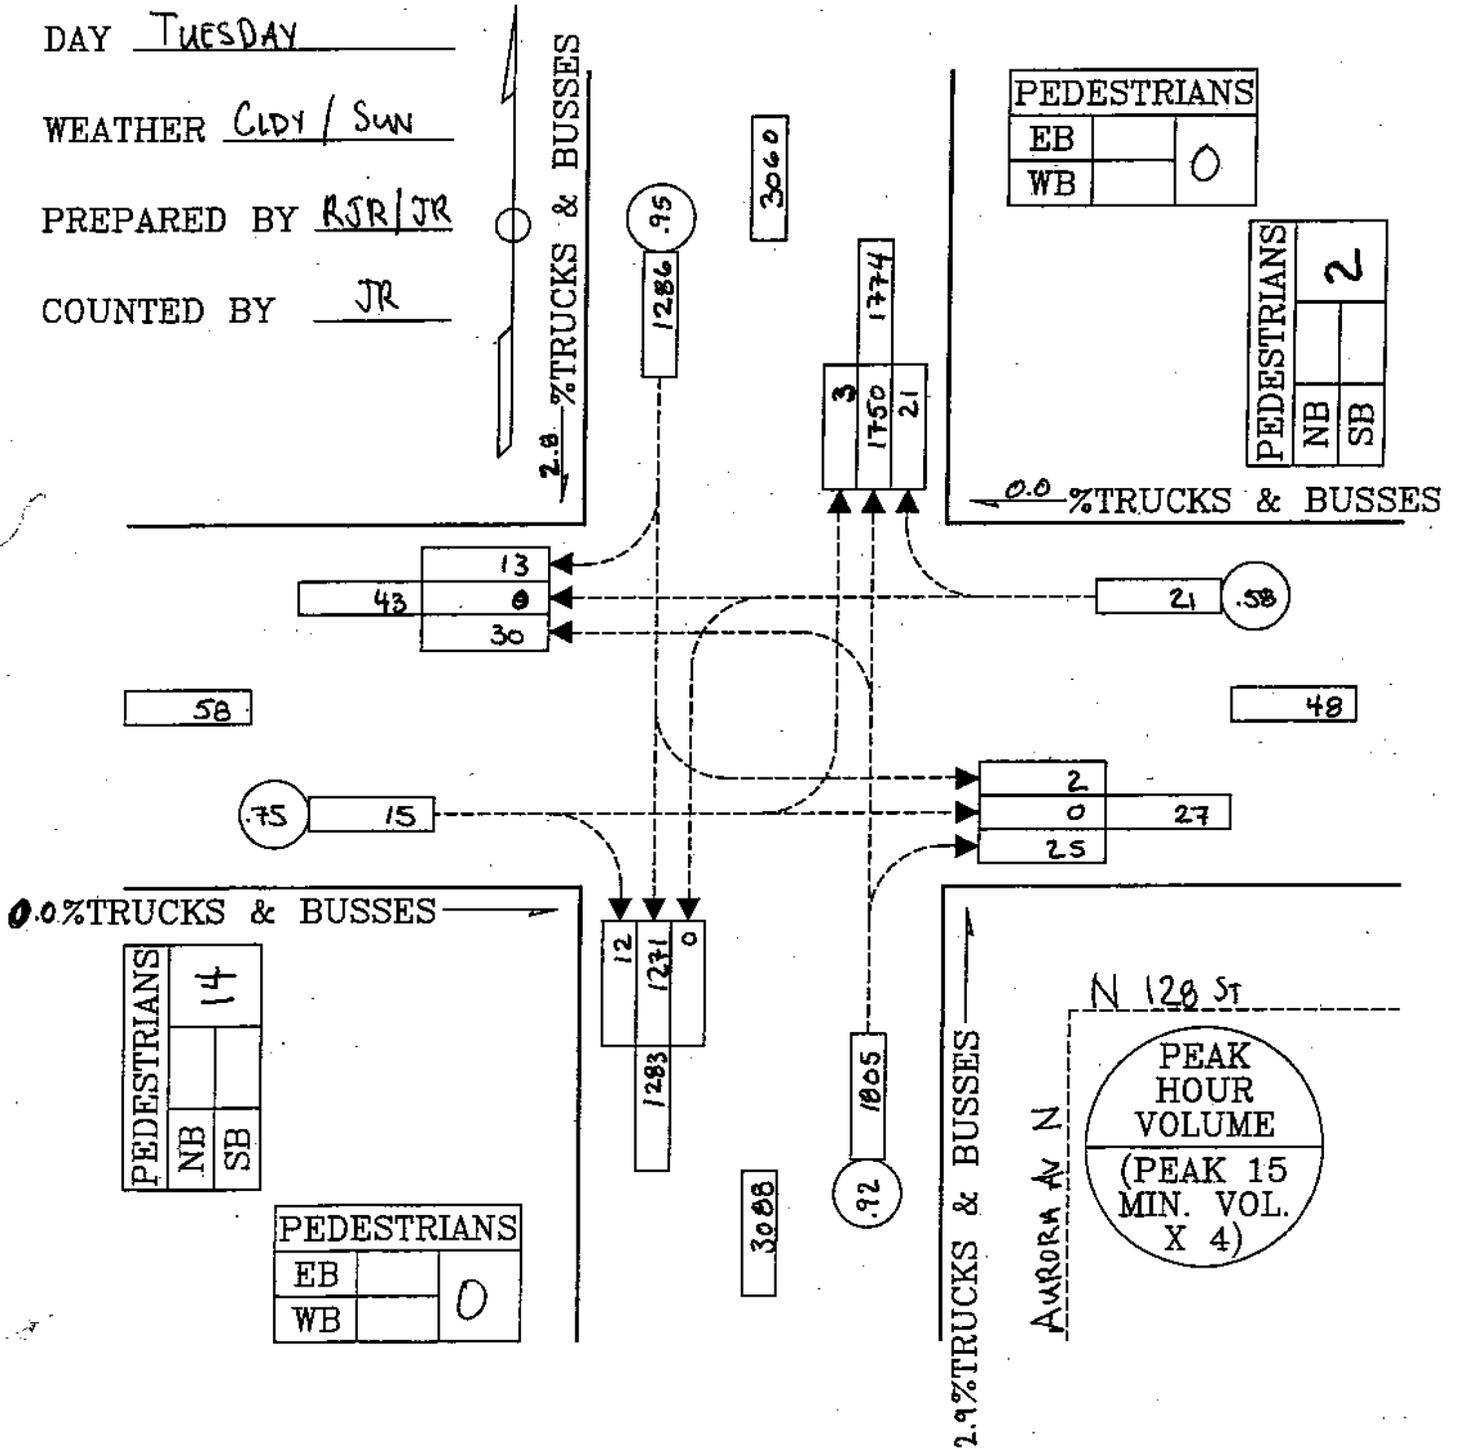

VEHICLE VOLUME SUMMARY

CITY OF SEATTLE
DEPARTMENT OF TRANSPORTATION

LOCATION Aurora Av N & N 135 St TIME 5:00-6:00

DATE 3-2-05


Pm PEAK HR

DAY WEDNESDAY

WEATHER Sunny

PREPARED BY JR

COUNTED BY JR

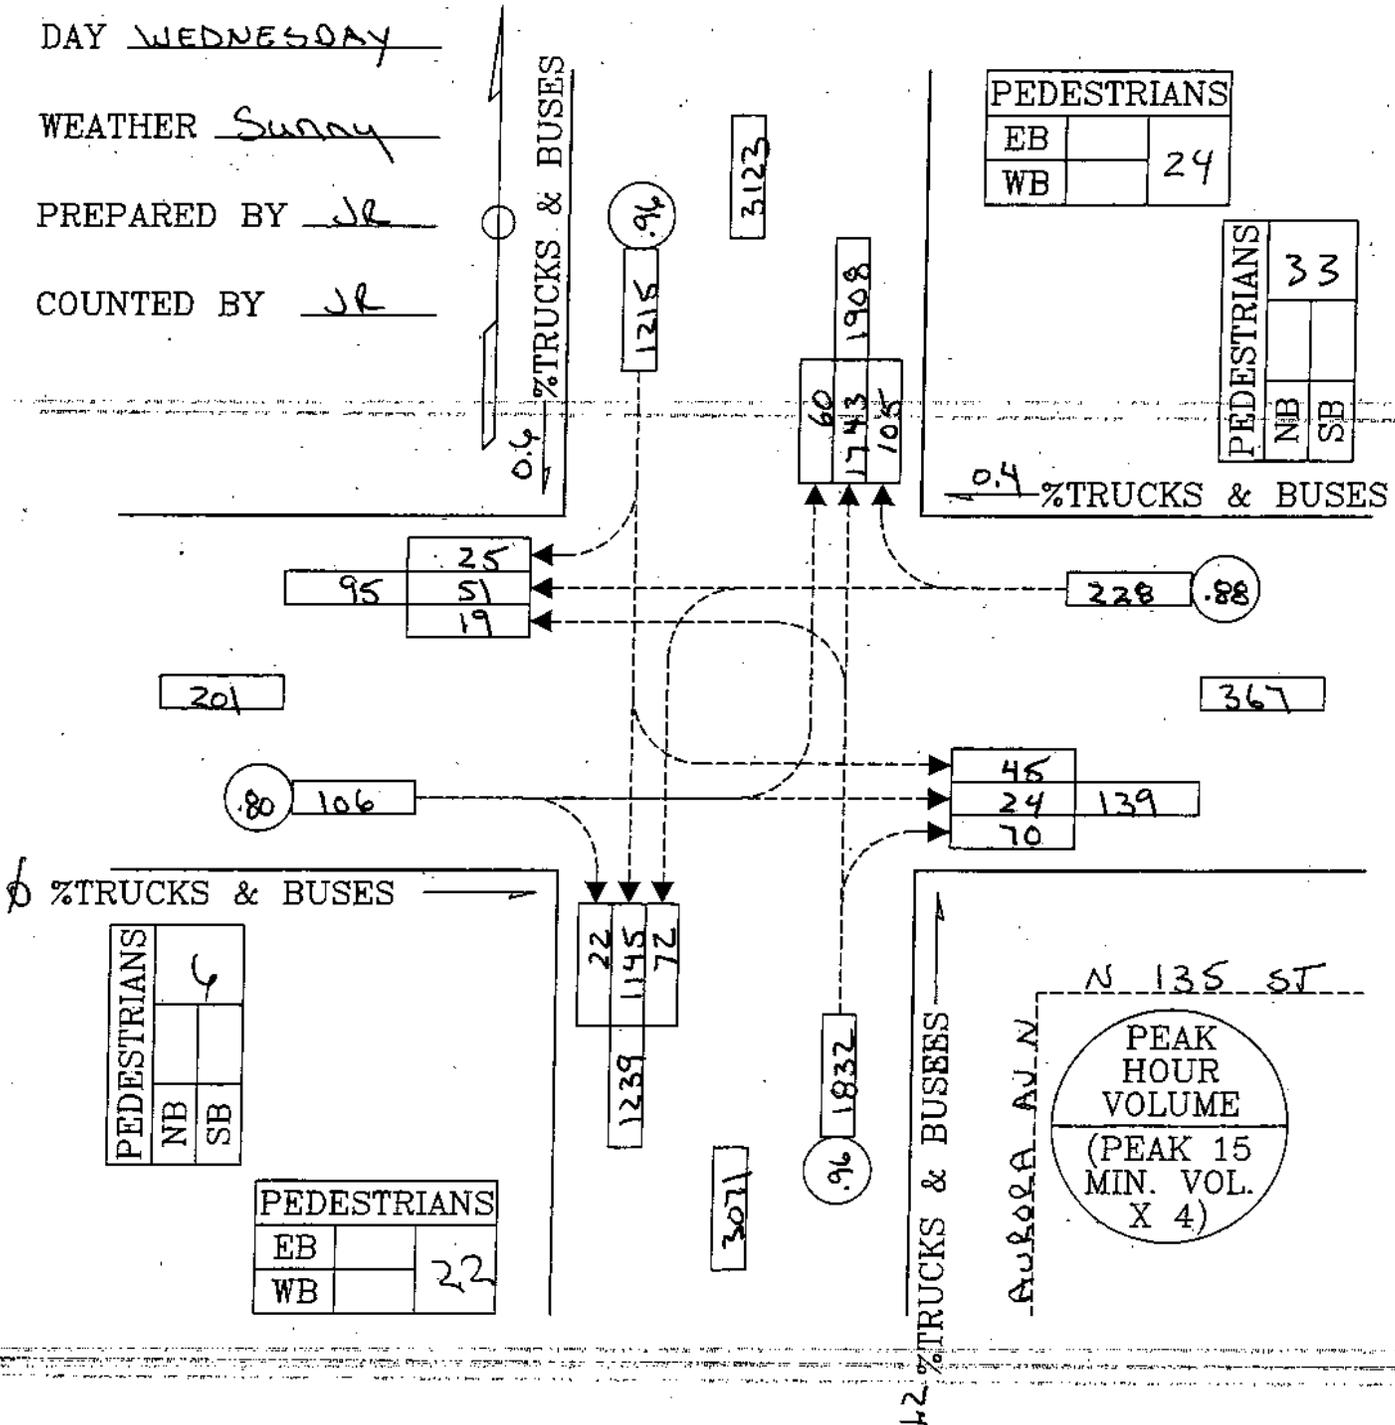

PEAK HOUR VOLUME
(PEAK 15 MIN. VOL. X 4)

VEHICLE VOLUME SUMMARY

CITY OF SEATTLE
DEPARTMENT OF TRANSPORTATION

LOCATION AURORA AV N E N 137 ST TIME 7:30-8:30 AM

DATE 12-10-02


AM PEAK

DAY Tuesday

WEATHER Rain Showers

PREPARED BY JJC

COUNTED BY JJC

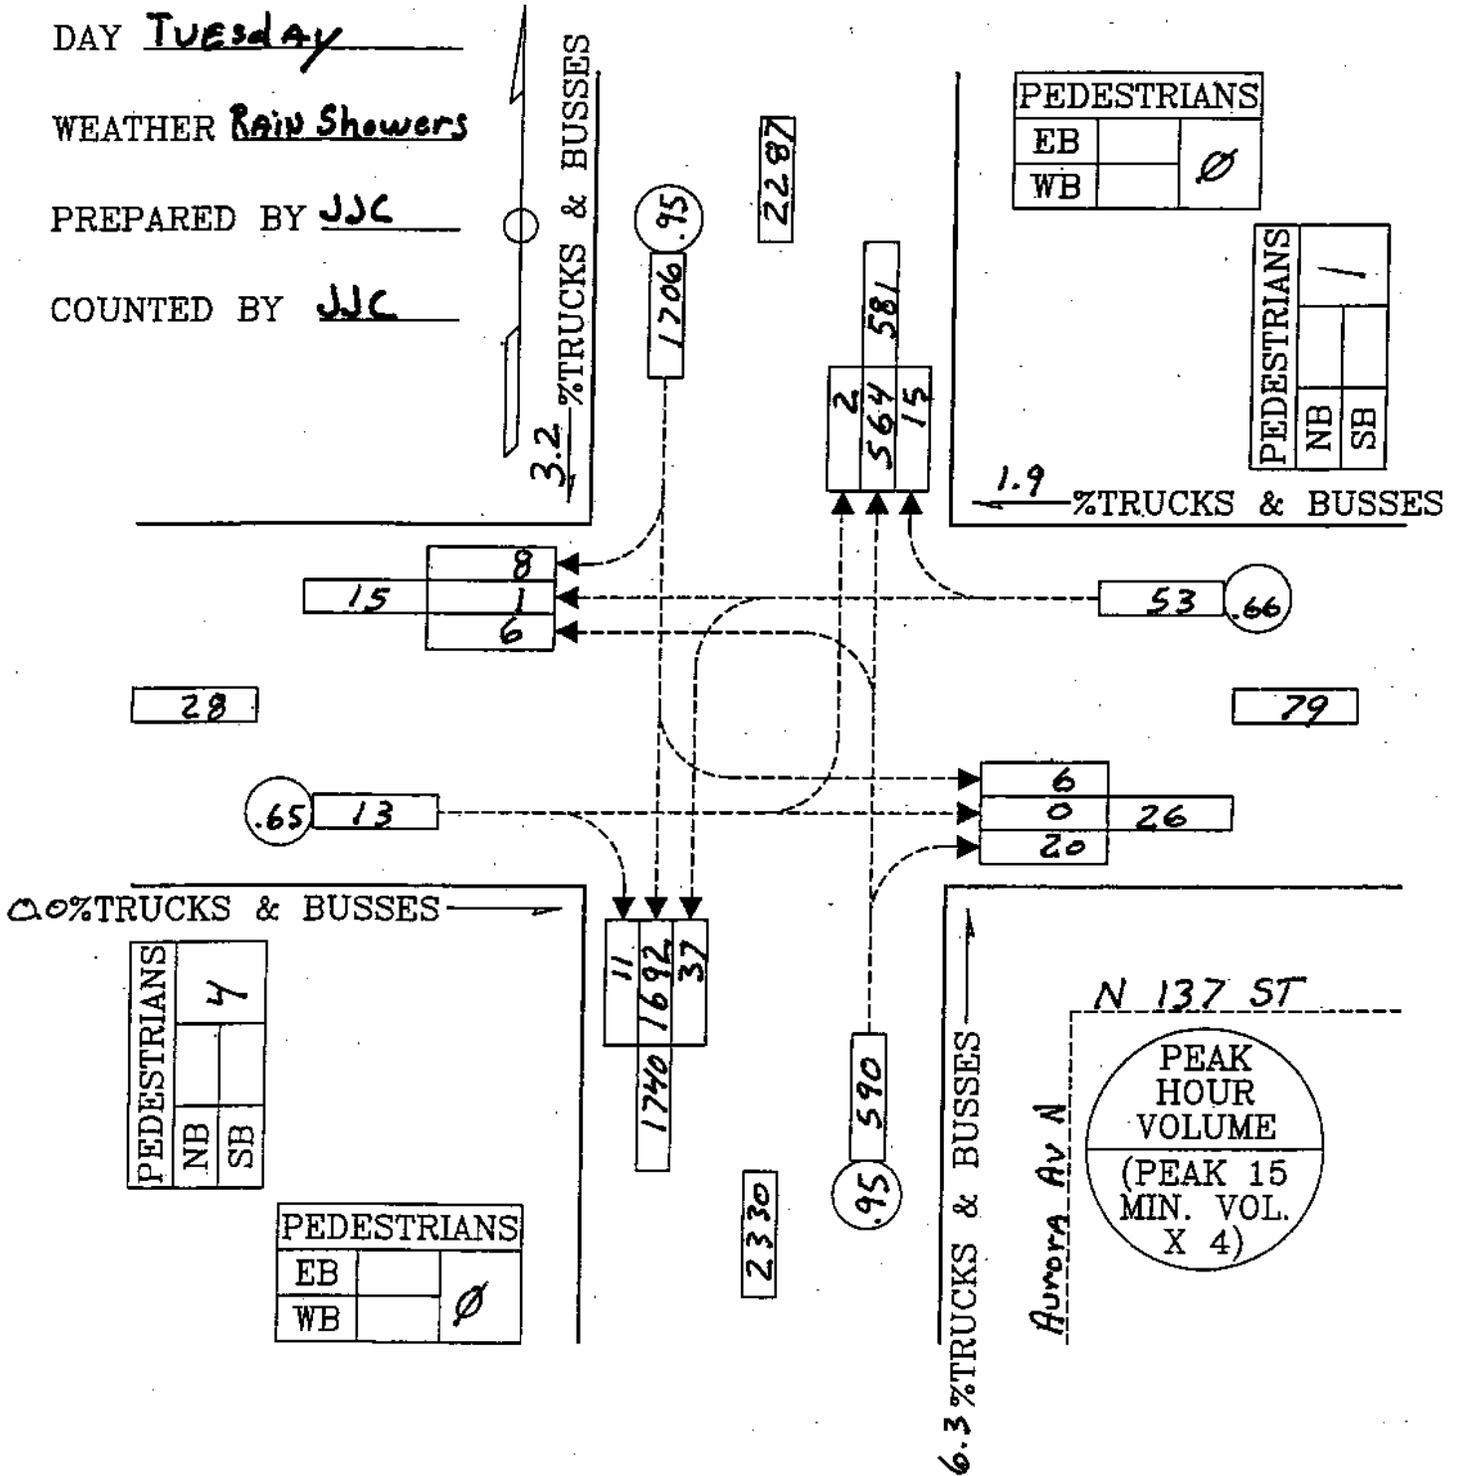

VEHICLE VOLUME SUMMARY

CITY OF SEATTLE
DEPARTMENT OF TRANSPORTATION

LOCATION AURORA AV N & N 137 ST TIME 4:45-5:45 PM

DATE 12-10-02


PM PEAK

DAY TUESDAY

WEATHER Rain Showers

PREPARED BY JJC

COUNTED BY JJC

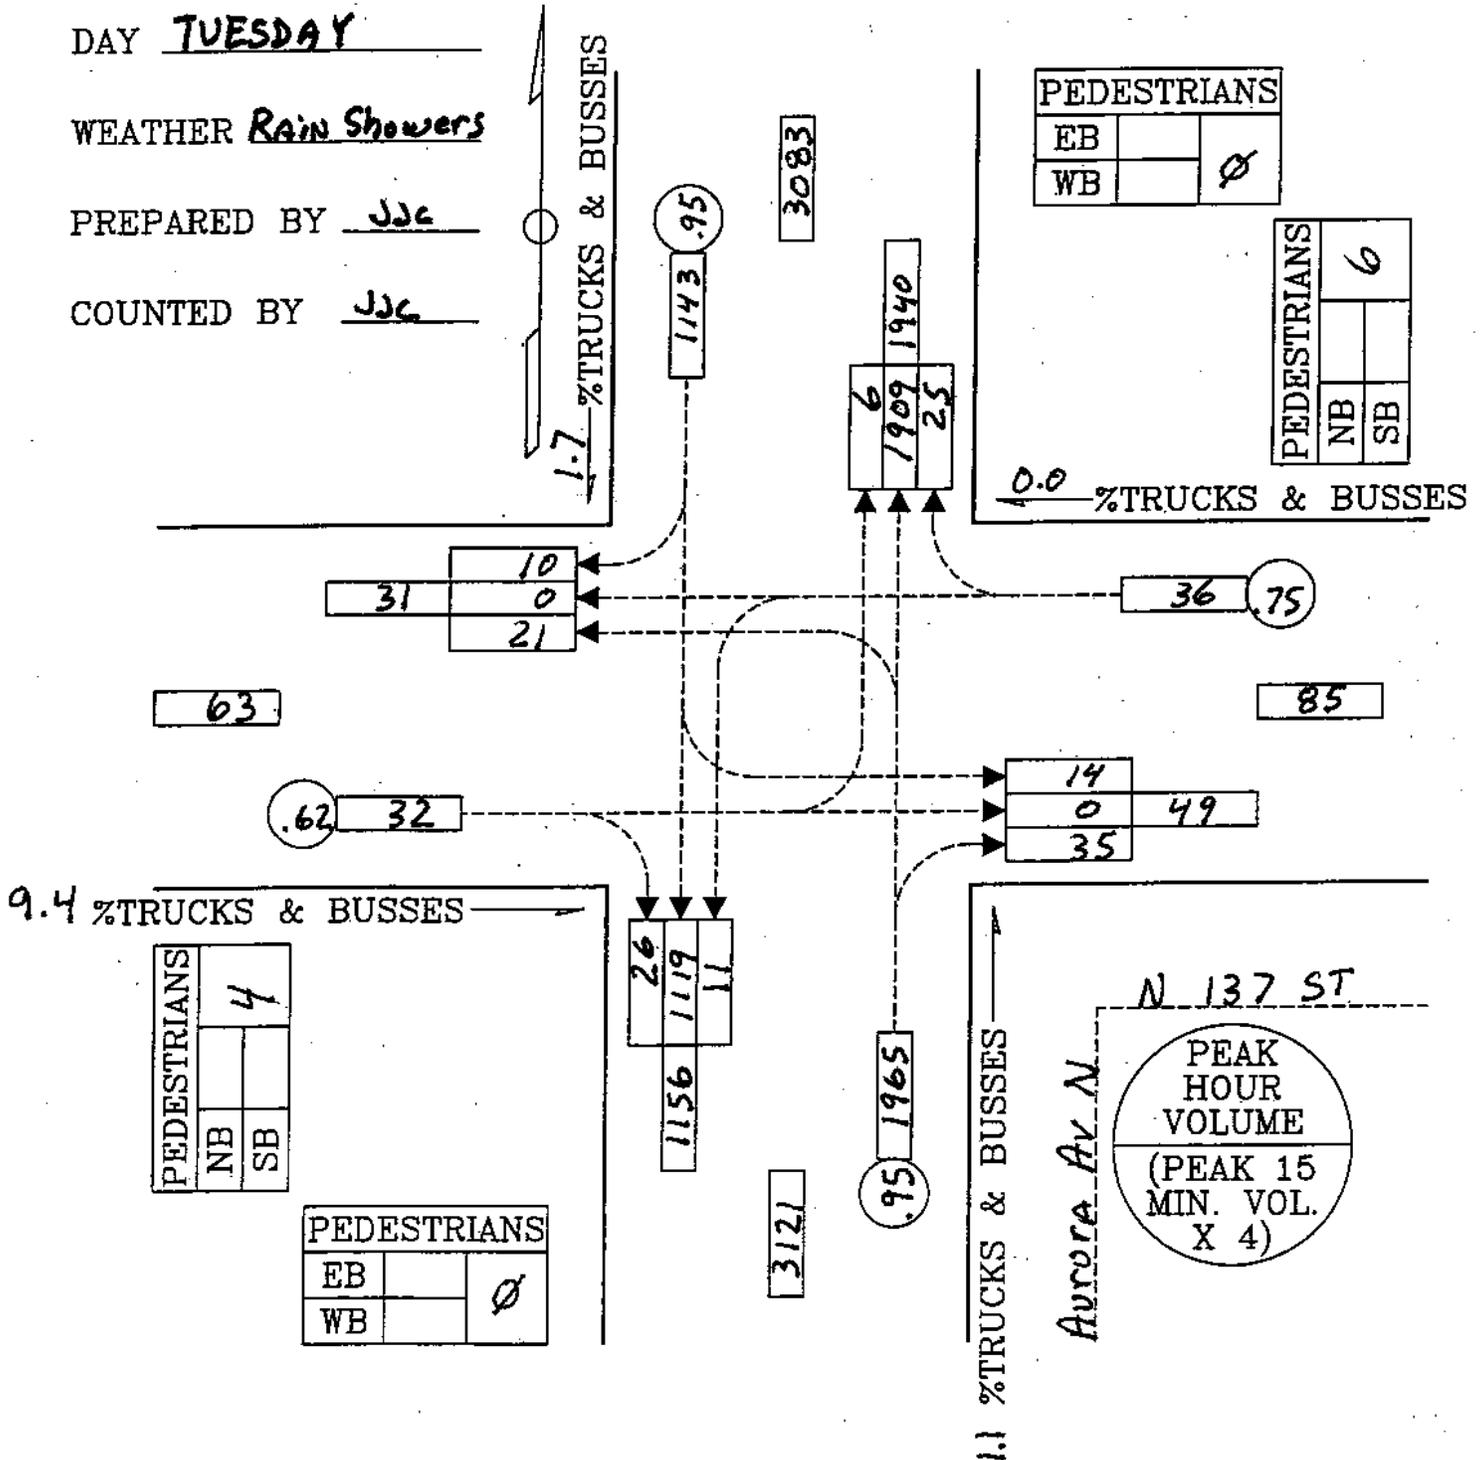

VEHICLE VOLUME SUMMARY

CITY OF SEATTLE
DEPARTMENT OF TRANSPORTATION

LOCATION AURORA AV N & N 140 ST TIME 7:00-8:00 AM

DATE 12-05-02

AM PEAK


DAY THURSDAY

WEATHER CLOUDY

PREPARED BY JJC

COUNTED BY JJC

PEDESTRIANS		
EB		4
WB		

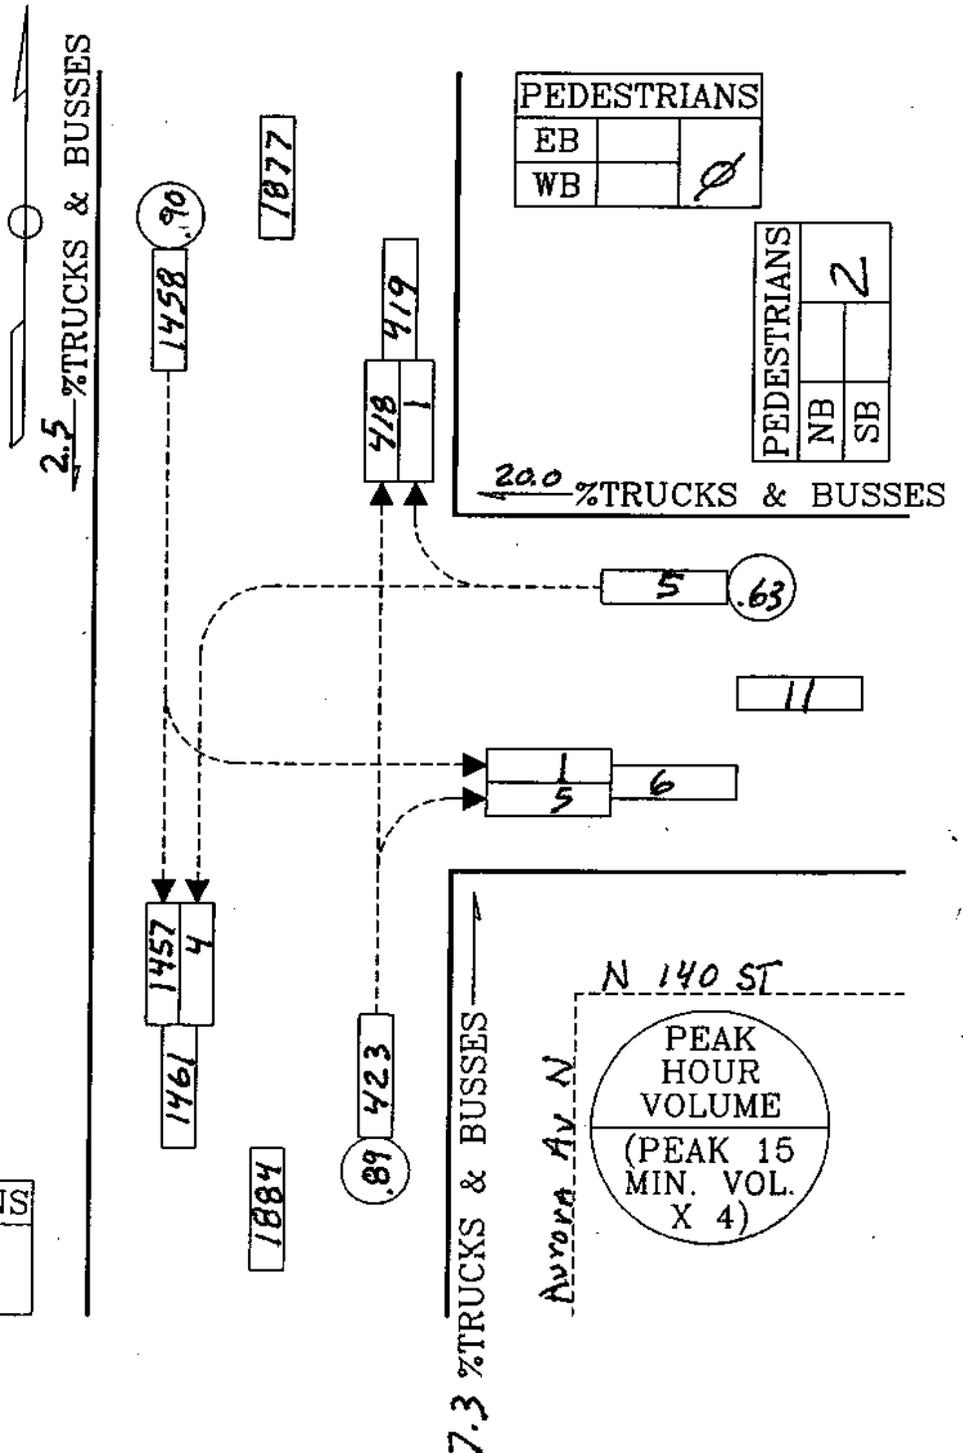

VEHICLE VOLUME SUMMARY

CITY OF SEATTLE
DEPARTMENT OF TRANSPORTATION

LOCATION AURORA AV N & N 140 ST TIME 4:15-5:15 PM

DATE 12-05-02

PM PEAK


DAY THURSDAY

WEATHER CLOUDY

PREPARED BY JJC

COUNTED BY JJC

PEDESTRIANS		
EB		10
WB		

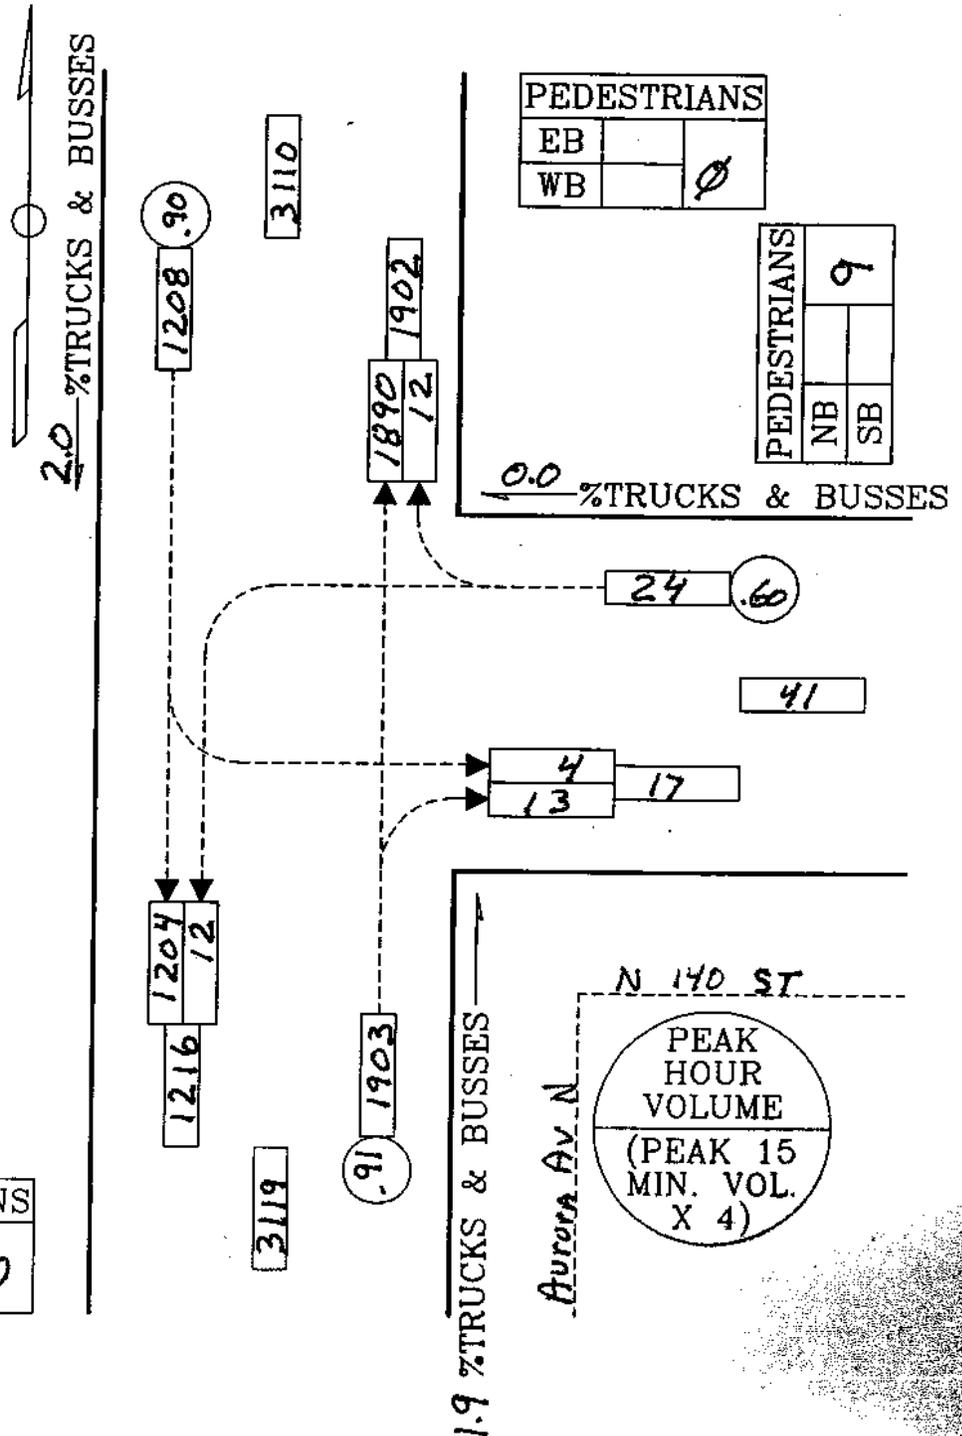

N 140 ST

PEAK HOUR VOLUME
(PEAK 15 MIN. VOL. X 4)

Aurora Av N

VEHICLE VOLUME SUMMARY

CITY OF SEATTLE
DEPARTMENT OF TRANSPORTATION

LOCATION AURORA AV N E N 143 ST TIME 7:00 - 8:00 AM

DATE 12-04-02


AM PEAK

DAY WEDNESDAY

WEATHER LIGHT RAIN

PREPARED BY JJC

COUNTED BY JJC

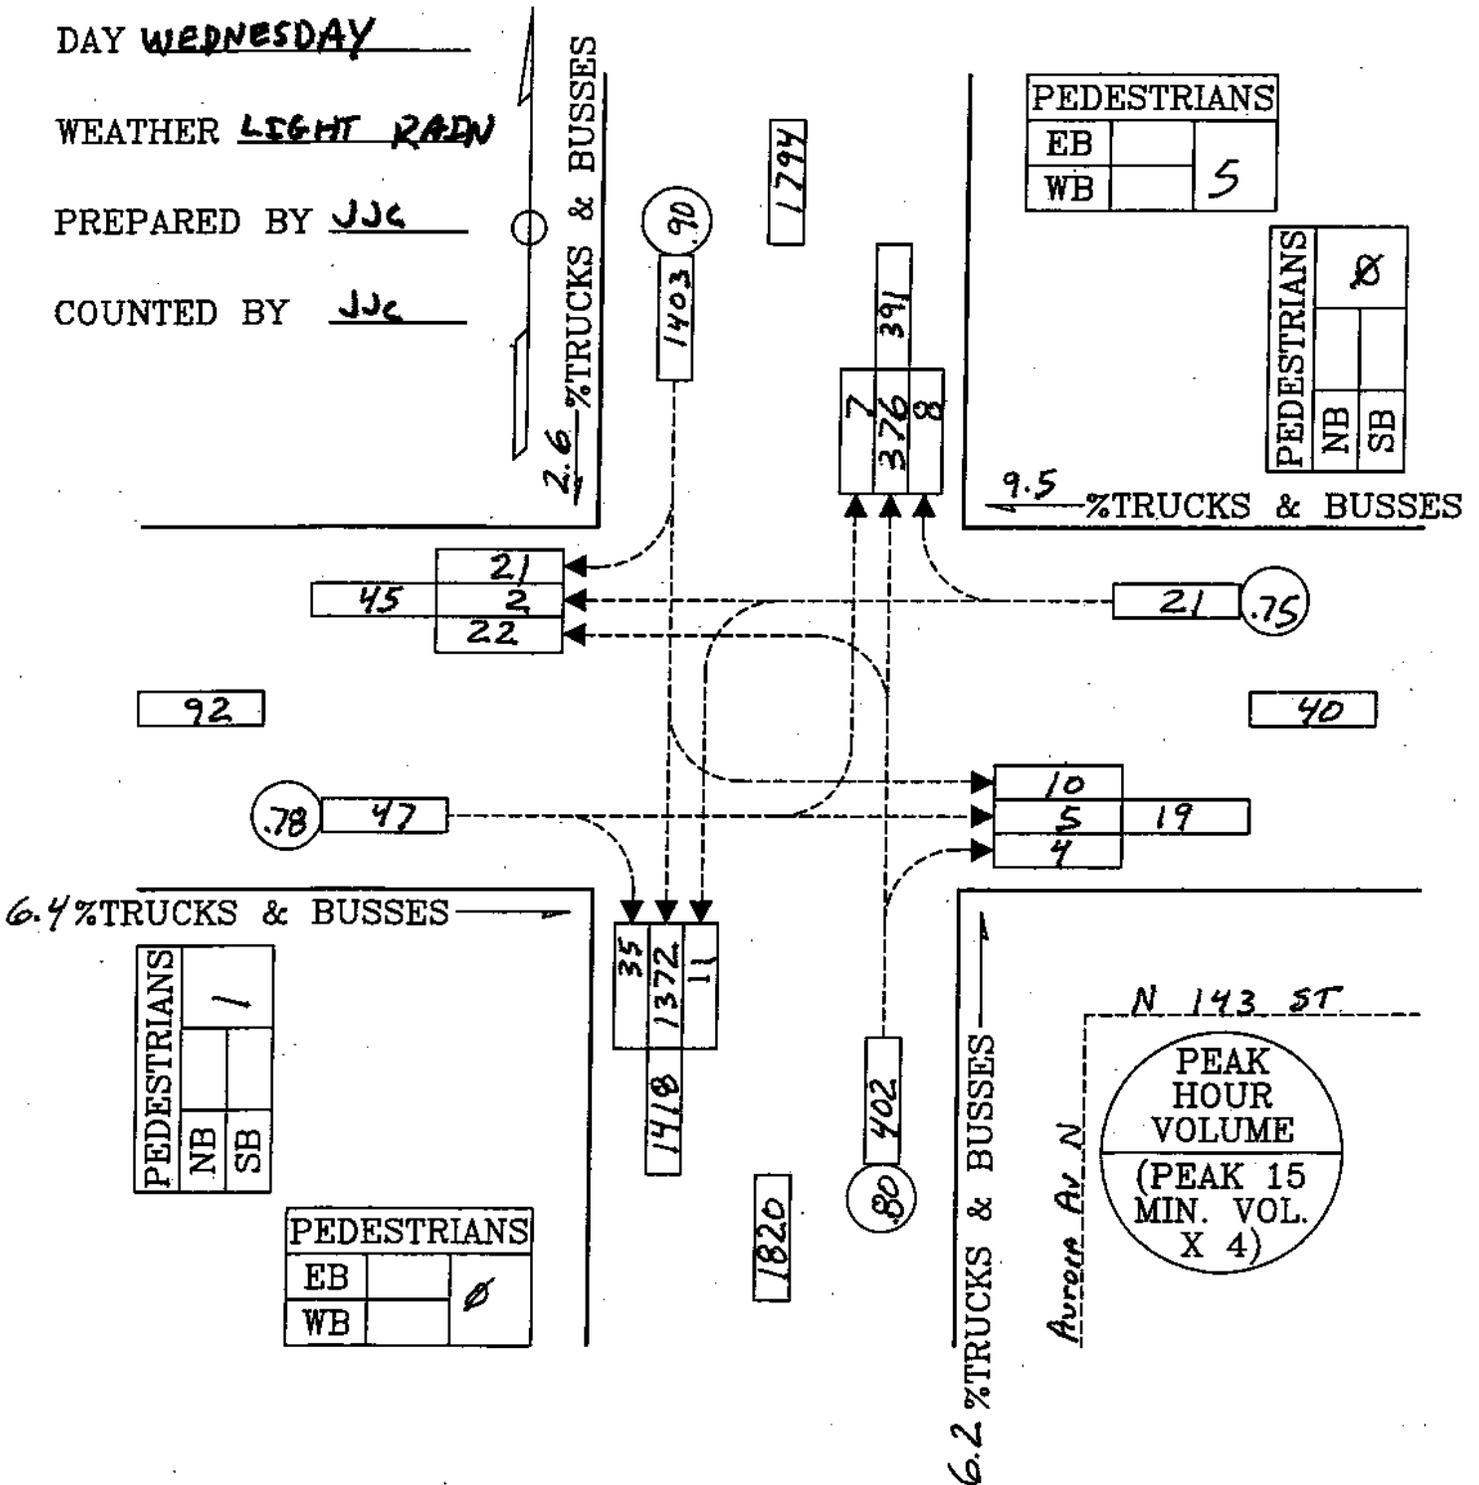

VEHICLE VOLUME SUMMARY

CITY OF SEATTLE
DEPARTMENT OF TRANSPORTATION

LOCATION AURORA AV N & N 143 ST TIME 4:00-5:00 PM

DATE 12-04-02


PM PEAK

DAY WEDNESDAY

WEATHER CLOUDY

PREPARED BY JJC

COUNTED BY JJC

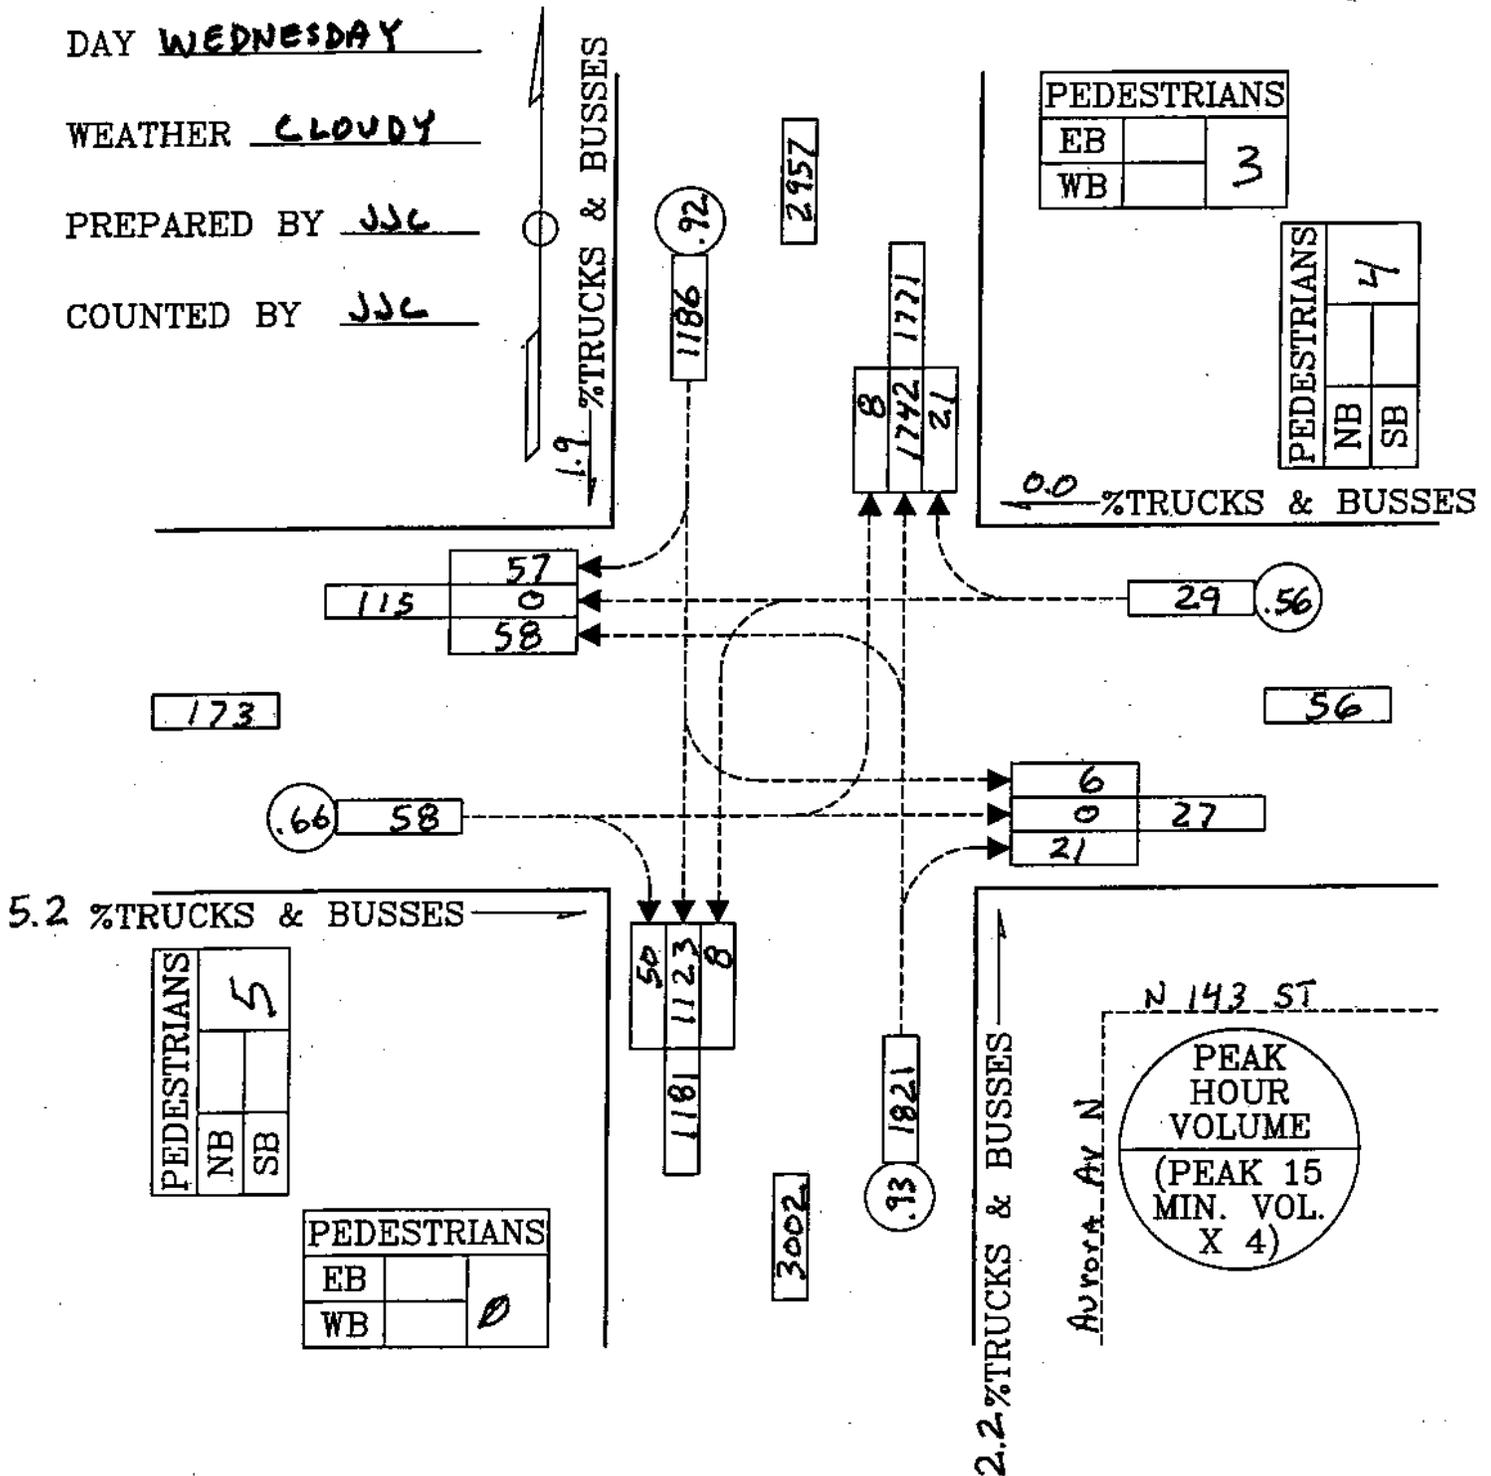

Appendix B

001/006

Bus Zone Activity

WEEKDAY ONLY DATA FOR SIGNUP: SPR '06 FINAL, DATED 6/27/2006

SOURCE: SEATTLE METRO APC SYSTEM

ZONE#	ON STREET	NS/FS	CROSS STREET	DIR	TIME	WO	ROUTE	SERV	TYPE	# OF	# OF	# OF	ON	OFF	LOAD	AVG
										UNIQUE	TOTAL	TIMES	AVG	TOTAL	AVG	TOTAL
										TRIPS	TRIPS	BUS	PSGRS	PSGRS	AVG	SEATS
										SEEN	SEEN	STOPPED	ONS	OFFS		
6950	Aurora Ave N	FM	N 145th St	S	AAM	I	28	E		1	8	4	0.6	1	0.0	63
6950	Aurora Ave N	FM	N 145th St	S	AAM	I	358	E		4	29	29	3.0	12	12.8	64
6950	Aurora Ave N	FM	N 145th St	S	AM	I	28	E		8	79	43	0.9	7	0.4	61
6950	Aurora Ave N	FM	N 145th St	S	AM	I	358	E		22	146	134	2.7	59	12.4	63
6950	Aurora Ave N	FM	N 145th St	S	MID	I	358	E		25	179	175	3.4	86	25.8	64
6950	Aurora Ave N	FM	N 145th St	S	PM	I	358	E		12	83	79	3.2	39	25.1	64
6950	Aurora Ave N	FM	N 145th St	S	XEV	-	OHD	L		1	53	7	0.0	0	1.5	52
6950	Aurora Ave N	FM	N 145th St	S	XEV	I	28	L		4	26	15	1.0	4	3.3	58
6950	Aurora Ave N	FM	N 145th St	S	XEV	I	358	E		8	47	41	2.0	16	22.2	64
6950	Aurora Ave N	FM	N 145th St	S	XNT	I	28	L		7	49	24	0.8	5	0.9	57
6950	Aurora Ave N	FM	N 145th St	S	XNT	I	358	E		7	44	42	1.5	10	15.1	64
TOTALS FOR ZONE#		6950					TOTAL TRIPS OBSERVED:			99			ONS:	238	OFFS:	118
6990	Aurora Ave N	FS	N 135th St	S	AAM	I	358	E		4	29	27	1.9	8	15.4	64
6990	Aurora Ave N	FS	N 135th St	S	AM	I	358	E		22	146	130	2.0	43	14.5	63
6990	Aurora Ave N	FS	N 135th St	S	MID	I	358	E		25	179	176	3.3	83	27.6	64
6990	Aurora Ave N	FS	N 135th St	S	PM	-	DHD	L		1	13	0	0.0	0	1.0	36
6990	Aurora Ave N	FS	N 135th St	S	PM	I	358	E		12	82	79	3.7	44	26.7	64
6990	Aurora Ave N	FS	N 135th St	S	XEV	I	358	E		8	47	45	2.7	21	22.4	64
6990	Aurora Ave N	FS	N 135th St	S	XNT	I	358	E		7	44	27	0.7	5	15.0	64
TOTALS FOR ZONE#		6990					TOTAL TRIPS OBSERVED:			79			ONS:	203	OFFS:	99
7000	Aurora Ave N	FS	N 130th St	S	AAM	I	358	E		4	29	28	1.6	6	17.1	64
7000	Aurora Ave N	FS	N 130th St	S	AM	I	358	E		22	146	120	1.6	34	15.8	63
7000	Aurora Ave N	FS	N 130th St	S	MID	I	358	E		25	179	177	4.9	122	29.0	64
7000	Aurora Ave N	FS	N 130th St	S	PM	-	DHD	L		1	13	0	0.0	0	1.0	36
7000	Aurora Ave N	FS	N 130th St	S	PM	I	358	E		12	82	81	5.6	67	28.3	64
7000	Aurora Ave N	FS	N 130th St	S	XEV	I	358	E		8	47	43	3.7	30	23.5	64
7000	Aurora Ave N	FS	N 130th St	S	XNT	I	358	E		7	44	27	1.6	11	15.3	64
TOTALS FOR ZONE#		7000					TOTAL TRIPS OBSERVED:			79			ONS:	270	OFFS:	80
7010	Aurora Ave N	FM	N 125th St	S	AAM	I	358	E		4	29	25	2.4	10	18.2	64
7010	Aurora Ave N	FM	N 125th St	S	AM	I	358	E		22	146	94	1.1	24	16.7	63
7010	Aurora Ave N	FM	N 125th St	S	MID	I	358	E		24	166	151	2.4	58	32.7	64
7010	Aurora Ave N	FM	N 125th St	S	PM	-	DHD	L		1	13	0	0.0	0	1.0	36
7010	Aurora Ave N	FM	N 125th St	S	PM	I	358	E		13	95	86	2.0	26	32.2	64
7010	Aurora Ave N	FM	N 125th St	S	XEV	I	358	E		8	47	39	1.4	11	26.1	64
7010	Aurora Ave N	FM	N 125th St	S	XNT	I	358	E		7	44	32	1.1	8	16.5	64

AAM: before 6am, AM: 6-9am, MID: 9am-3:15pm, PM: 3:15-6:15pm, XEV: 6:15-9:30pm, XNT: 9:30pm-close

Please refer to "apcnodes.doc" for an explanation of the terms used in this report, and a list of data limitations.

Print Date: 6/30/2006

06/30/2006 FRI 14:20 FAX 206 684 1860

0002/006

Bus Zone Activity

WEEKDAY ONLY DATA FOR SIGNUP: SPR '06 FINAL, DATED 6/27/2006

SOURCE: SEATTLE METRO APC SYSTEM

ZONE#	ON STREET	NS/FS	CROSS STREET	DIR	TIME	VO	ROUTE	SERV	TYPE	# OF	# OF	# OF	ON	OFF	LOAD	AVG			
										UNIQUE	TOTAL	TIMES	AVG	TOTAL	AVG	APPR	NUM		
										TRIPS	TRIPS	BUS	PSGRS	PSGRS	AVG	SEATS			
										SEEN	SEEN	STOPPED	ONS	OFFS					
TOTALS FOR ZONE#		7010	TOTAL TRIPS OBSERVED:							79				ONS:	136	OFFS:	48		
7040	Aurora Ave N	FS	N 115th St	S	AAM	I	358	E		4	29	19	0.7	3	20.3	64			
7040	Aurora Ave N	FS	N 115th St	S	AM	I	358	E		21	142	94	1.5	31	16.4	62			
7040	Aurora Ave N	FS	N 115th St	S	MID	I	358	E		25	170	132	1.3	32	34.4	64			
7040	Aurora Ave N	FS	N 115th St	S	PM	-	DHD	L		1	13	0	0.0	0	1.0	36			
7040	Aurora Ave N	FS	N 115th St	S	PM	I	358	E		13	95	78	1.0	13	33.3	64			
7040	Aurora Ave N	FS	N 115th St	S	XEV	I	358	E		8	47	37	1.1	9	27.1	64			
7040	Aurora Ave N	FS	N 115th St	S	XNT	I	358	E		7	44	20	0.5	4	17.2	64			
TOTALS FOR ZONE#		7040	TOTAL TRIPS OBSERVED:							79				ONS:	90	OFFS:	29		
7050	Aurora Ave N	NS	WASHELLI	S	AAM	I	358	E		4	29	1	0.0	0	20.8	64			
7050	Aurora Ave N	NS	WASHELLI	S	AM	I	358	E		21	142	16	0.1	2	17.7	62			
7050	Aurora Ave N	NS	WASHELLI	S	MID	I	358	E		25	170	36	0.2	4	35.2	64			
7050	Aurora Ave N	NS	WASHELLI	S	PM	-	DHD	L		1	13	0	0.0	0	1.0	36			
7050	Aurora Ave N	NS	WASHELLI	S	PM	I	358	E		12	87	19	0.2	3	33.8	64			
7050	Aurora Ave N	NS	WASHELLI	S	XEV	I	358	E		9	55	9	0.2	2	28.1	64			
7050	Aurora Ave N	NS	WASHELLI	S	XNT	I	358	E		7	44	2	0.0	0	17.5	64			
TOTALS FOR ZONE#		7050	TOTAL TRIPS OBSERVED:							79				ONS:	10	OFFS:	6		

06/30/2006 FRI 14:20 FAX 206 684 1860

AAM: before 6am, AM: 6-9am, MID: 9am-3:15pm, PM: 3:15-6:15pm, XEV: 6:15-9:30pm, XNT: 9:30pm-close
 Please refer to "apcnotes.doc" for an explanation of the terms used in this report, and a list of data limitations.
 Print Date: 6/30/2006

003/006

Bus Zone Activity

WEEKDAY ONLY DATA FOR SIGNUP: SPR '06 FINAL, DATED 6/27/2006

SOURCE: SEATTLE METRO APC SYSTEM

ZONE#	ON STREET	NS/FS	CROSS STREET	DIR	TIME	I/O	ROUTE	SERV	TYPE	# OF	# OF	# OF	ON	OFF	LOAD	AVG	
										UNIQUE	TOTAL	TIMES	AVG	TOTAL	AVG	TOTAL	APPR
										TRIPS	TRIPS	BUS	PSGRS	PSGRS	AVG	SEATS	
										SEEN	SEEN	STOPPED	ONS	OFFS			
7840	Aurora Ave N	FS	WASHELLI ENT	N	AM	O	358	E		12	81	21	0.0	0	0.3	64	
7840	Aurora Ave N	FS	WASHELLI ENT	N	MID	O	358	E		25	175	37	0.1	2	0.2	64	
7840	Aurora Ave N	FS	WASHELLI ENT	N	PM	O	358	E		19	131	21	0.0	1	0.2	64	
7840	Aurora Ave N	FS	WASHELLI ENT	N	XEV	-	DHD	L		1	5	0	0.0	0	0.0	42	
7840	Aurora Ave N	FS	WASHELLI ENT	N	XEV	O	358	E		13	85	10	0.0	0	0.1	64	
7840	Aurora Ave N	FS	WASHELLI ENT	N	XNT	O	358	E		9	59	8	0.0	0	0.1	64	
TOTALS FOR ZONE#		7840	TOTAL TRIPS OBSERVED:							79	ONS:	3	OFFS:	14			
7850	Aurora Ave N	FS	N 115th St	N	AM	O	358	E		12	81	51	0.4	4	1.0	64	
7850	Aurora Ave N	FS	N 115th St	N	MID	O	358	E		25	175	125	0.4	10	0.9	64	
7850	Aurora Ave N	FS	N 115th St	N	PM	O	358	E		19	131	98	0.4	7	1.3	64	
7850	Aurora Ave N	FS	N 115th St	N	XEV	-	DHD	L		1	5	0	0.0	0	0.0	42	
7850	Aurora Ave N	FS	N 115th St	N	XEV	O	358	E		13	85	61	0.2	3	1.6	64	
7850	Aurora Ave N	FS	N 115th St	N	XNT	O	358	E		9	59	44	0.2	1	1.6	64	
TOTALS FOR ZONE#		7850	TOTAL TRIPS OBSERVED:							79	ONS:	25	OFFS:	96			
7880	Aurora Ave N	FS	N 125th St	N	AM	O	358	E		11	75	71	0.3	4	2.0	64	
7880	Aurora Ave N	FS	N 125th St	N	MID	O	358	E		25	176	166	0.8	20	2.3	64	
7880	Aurora Ave N	FS	N 125th St	N	PM	O	358	E		20	136	115	0.4	8	1.7	64	
7880	Aurora Ave N	FS	N 125th St	N	XEV	-	DHD	L		1	5	0	0.0	0	0.0	42	
7880	Aurora Ave N	FS	N 125th St	N	XEV	O	358	E		13	85	72	0.3	4	1.7	64	
7880	Aurora Ave N	FS	N 125th St	N	XNT	O	358	E		9	59	41	0.3	3	1.2	64	
TOTALS FOR ZONE#		7880	TOTAL TRIPS OBSERVED:							79	ONS:	37	OFFS:	148			
7900	Aurora Ave N	FS	N 130th St	N	AM	O	358	E		11	75	72	0.9	10	4.2	64	
7900	Aurora Ave N	FS	N 130th St	N	MID	O	358	E		25	176	170	2.2	55	4.8	64	
7900	Aurora Ave N	FS	N 130th St	N	PM	O	358	E		19	126	119	1.5	29	3.8	64	
7900	Aurora Ave N	FS	N 130th St	N	XEV	-	DHD	L		1	52	2	0.0	0	0.0	45	
7900	Aurora Ave N	FS	N 130th St	N	XEV	O	358	E		14	95	84	1.0	15	2.3	64	
7900	Aurora Ave N	FS	N 130th St	N	XNT	O	358	E		9	59	38	0.7	6	1.0	64	
TOTALS FOR ZONE#		7900	TOTAL TRIPS OBSERVED:							79	ONS:	114	OFFS:	281			
7912	Aurora Ave N	FS	N 135th St	N	AM	O	358	E		11	75	57	0.3	3	1.2	64	
7912	Aurora Ave N	FS	N 135th St	N	MID	O	358	E		25	176	164	1.2	30	2.2	64	
7912	Aurora Ave N	FS	N 135th St	N	PM	O	358	E		19	126	111	0.9	17	2.8	64	
7912	Aurora Ave N	FS	N 135th St	N	XEV	-	DHD	L		1	52	0	0.0	0	0.0	45	
7912	Aurora Ave N	FS	N 135th St	N	XEV	O	358	E		14	95	79	0.8	9	1.5	64	
7912	Aurora Ave N	FS	N 135th St	N	XNT	O	358	E		9	59	39	0.2	2	1.0	64	
TOTALS FOR ZONE#		7912	TOTAL TRIPS OBSERVED:							79	ONS:	60	OFFS:	151			

AAM: before 6am, AM: 6-9am, MID: 9am-3:15pm, PM: 3:15-6:15pm, XEV: 6:15-9:30pm, XNT: 9:30pm-close

Please refer to "apnotes.doc" for an explanation of the terms used in this report, and a list of data limitations.

Print Date: 6/30/2006

06/30/2006 FRI 14:21 FAX 206 684 1860

004/006

Bus Zone Activity

WEEKDAY ONLY DATA FOR SIGNUP: SPR '06 FINAL, DATED 6/27/2006

SOURCE: SEATTLE METRO APC SYSTEM

ZONE#	ON STREET	NS/FS	CROSS STREET	DIR	TIME	VO	ROUTE	SERV	# OF	# OF	# OF	ON	OFF	LOAD	AVG			
									UNIQUE	TOTAL	TIMES	AVG	TOTAL	AVG	APPR	NUM		
									TRIPS	TRIPS	BUS	PSGRS	PSGRS	AVG	SEATS			
									SEEN	SEEN	STOPPED	TOTAL	TOTAL					
75820	Aurora Ave N	FM	N 145th St	N	AM	O	358	E	11	75	73	1.7	19	2.2	24	18.8	64	
75820	Aurora Ave N	FM	N 145th St	N	MID	-	DHD	L	1	65	6	0.1	0	0.1	0	0.3	61	
75820	Aurora Ave N	FM	N 145th St	N	MID	O	358	E	25	176	170	1.8	40	2.6	64	26.1	64	
75820	Aurora Ave N	FM	N 145th St	N	PM	O	358	E	19	126	121	1.4	26	3.3	62	20.6	64	
75820	Aurora Ave N	FM	N 145th St	N	XEV	O	358	E	14	95	88	0.8	12	2.4	34	19.0	64	
75820	Aurora Ave N	FM	N 145th St	N	XNT	O	358	E	9	59	54	0.8	7	2.3	21	14.6	64	
TOTALS FOR ZONE#		75820							TOTAL TRIPS OBSERVED:	79			ONS:	103	OFFS:	205		

06/30/2006 FRI 14:21 FAX 206 684 1860

Bus Zone Activity

WEEKDAY DATA FOR SIGNUP: SPR '06 FINAL, DATED 6/27/2006 SOURCE: SEATTLE METRO APC SYSTEM

ZONE#	ON STREET	NS/FS	CROSS STREET	DIR	TIME	TOTAL TRIPS		
						OBSERVED	TOTAL ONS	TOTAL OFFS
6950	Aurora Ave N	FM	N 145th St	S	AAM	5	12	2
6950	Aurora Ave N	FM	N 145th St	S	AM	30	66	17
6950	Aurora Ave N	FM	N 145th St	S	MID	25	86	43
6950	Aurora Ave N	FM	N 145th St	S	PM	12	39	24
6950	Aurora Ave N	FM	N 145th St	S	XEV	13	20	18
6950	Aurora Ave N	FM	N 145th St	S	XNT	14	18	14
TOTAL FOR SELECTED TIME PERIOD(S) FOR ZONE # 6950:						99	238	118
6990	Aurora Ave N	FS	N 135th St	S	AAM	4	8	1
6990	Aurora Ave N	FS	N 135th St	S	AM	22	43	13
6990	Aurora Ave N	FS	N 135th St	S	MID	25	83	46
6990	Aurora Ave N	FS	N 135th St	S	PM	13	44	25
6990	Aurora Ave N	FS	N 135th St	S	XEV	8	21	12
6990	Aurora Ave N	FS	N 135th St	S	XNT	7	5	3
TOTAL FOR SELECTED TIME PERIOD(S) FOR ZONE # 6990:						79	203	99
7000	Aurora Ave N	FS	N 130th St	S	AAM	4	6	2
7000	Aurora Ave N	FS	N 130th St	S	AM	22	34	16
7000	Aurora Ave N	FS	N 130th St	S	MID	25	122	35
7000	Aurora Ave N	FS	N 130th St	S	PM	13	67	18
7000	Aurora Ave N	FS	N 130th St	S	XEV	8	30	9
7000	Aurora Ave N	FS	N 130th St	S	XNT	7	11	3
TOTAL FOR SELECTED TIME PERIOD(S) FOR ZONE # 7000:						79	270	80
7010	Aurora Ave N	FM	N 125th St	S	AAM	4	10	1
7010	Aurora Ave N	FM	N 125th St	S	AM	22	24	8
7010	Aurora Ave N	FM	N 125th St	S	MID	24	58	20
7010	Aurora Ave N	FM	N 125th St	S	PM	14	26	11
7010	Aurora Ave N	FM	N 125th St	S	XEV	8	11	4
7010	Aurora Ave N	FM	N 125th St	S	XNT	7	8	3
TOTAL FOR SELECTED TIME PERIOD(S) FOR ZONE # 7010:						79	136	48
7040	Aurora Ave N	FS	N 115th St	S	AAM	4	3	1
7040	Aurora Ave N	FS	N 115th St	S	AM	21	31	4
7040	Aurora Ave N	FS	N 115th St	S	MID	25	32	12
7040	Aurora Ave N	FS	N 115th St	S	PM	14	13	7
7040	Aurora Ave N	FS	N 115th St	S	XEV	8	9	4
7040	Aurora Ave N	FS	N 115th St	S	XNT	7	4	1
TOTAL FOR SELECTED TIME PERIOD(S) FOR ZONE # 7040:						79	90	29
7050	Aurora Ave N	NS	WASHELLI	S	AAM	4	0	0
7050	Aurora Ave N	NS	WASHELLI	S	AM	21	2	1
7050	Aurora Ave N	NS	WASHELLI	S	MID	25	4	2
7050	Aurora Ave N	NS	WASHELLI	S	PM	13	3	2
7050	Aurora Ave N	NS	WASHELLI	S	XEV	9	2	1
7050	Aurora Ave N	NS	WASHELLI	S	XNT	7	0	1
TOTAL FOR SELECTED TIME PERIOD(S) FOR ZONE # 7050:						79	10	6

AAM: before 6am, AM: 6-9am, MID: 9am-3:15pm, PM: 3:15-6:15pm, XEV: 6:15-9:30pm, XNT: 9:30pm-close

Please refer to "apcnotes.doc" for an explanation of the terms used in this report, and a list of data limitations.

Print Date 6/30/2006

Page 1 of 1

Bus Zone Activity

WEEKDAY DATA FOR SIGNUP: SPR '06 FINAL, DATED 6/27/2006 SOURCE: SEATTLE METRO APC SYSTEM

ZONE#	ON STREET	NS/FS	CROSS STREET	DIR	TIME	TOTAL TRIPS		
						OBSERVED	TOTAL ONS	TOTAL OFFS
7840	Aurora Ave N	FS	WASHELLI ENT	N	AM	12	0	3
7840	Aurora Ave N	FS	WASHELLI ENT	N	MID	25	2	6
7840	Aurora Ave N	FS	WASHELLI ENT	N	PM	19	1	3
7840	Aurora Ave N	FS	WASHELLI ENT	N	XEV	14	0	0
7840	Aurora Ave N	FS	WASHELLI ENT	N	XNT	9	0	0
TOTAL FOR SELECTED TIME PERIOD(S) FOR ZONE # 7840:						79	3	14
7850	Aurora Ave N	FS	N 115th St	N	AM	12	4	12
7850	Aurora Ave N	FS	N 115th St	N	MID	25	10	24
7850	Aurora Ave N	FS	N 115th St	N	PM	19	7	25
7850	Aurora Ave N	FS	N 115th St	N	XEV	14	3	21
7850	Aurora Ave N	FS	N 115th St	N	XNT	9	1	14
TOTAL FOR SELECTED TIME PERIOD(S) FOR ZONE # 7850:						79	26	96
7880	Aurora Ave N	FS	N 125th St	N	AM	11	4	22
7880	Aurora Ave N	FS	N 125th St	N	MID	25	20	59
7880	Aurora Ave N	FS	N 125th St	N	PM	20	8	34
7880	Aurora Ave N	FS	N 125th St	N	XEV	14	4	22
7880	Aurora Ave N	FS	N 125th St	N	XNT	9	3	11
TOTAL FOR SELECTED TIME PERIOD(S) FOR ZONE # 7880:						79	37	148
7900	Aurora Ave N	FS	N 130th St	N	AM	11	10	46
7900	Aurora Ave N	FS	N 130th St	N	MID	25	55	121
7900	Aurora Ave N	FS	N 130th St	N	PM	19	29	72
7900	Aurora Ave N	FS	N 130th St	N	XEV	15	15	32
7900	Aurora Ave N	FS	N 130th St	N	XNT	9	6	10
TOTAL FOR SELECTED TIME PERIOD(S) FOR ZONE # 7900:						79	114	281
7912	Aurora Ave N	FS	N 135th St	N	AM	11	3	13
7912	Aurora Ave N	FS	N 135th St	N	MID	25	30	54
7912	Aurora Ave N	FS	N 135th St	N	PM	19	17	53
7912	Aurora Ave N	FS	N 135th St	N	XEV	15	9	22
7912	Aurora Ave N	FS	N 135th St	N	XNT	9	2	9
TOTAL FOR SELECTED TIME PERIOD(S) FOR ZONE # 7912:						79	60	151
75820	Aurora Ave N	FM	N 145th St	N	AM	11	19	24
75820	Aurora Ave N	FM	N 145th St	N	MID	26	40	64
75820	Aurora Ave N	FM	N 145th St	N	PM	19	26	62
75820	Aurora Ave N	FM	N 145th St	N	XEV	14	12	34
75820	Aurora Ave N	FM	N 145th St	N	XNT	9	7	21
TOTAL FOR SELECTED TIME PERIOD(S) FOR ZONE # 75820:						79	103	205

AAM: before 6am, AM: 6-9am, MID: 9am-3:15pm, PM: 3:15-6:15pm, XEV: 6:15-9:30pm, XNT: 9:30pm-close
 Please refer to "apcnotes.doc" for an explanation of the terms used in this report, and a list of data limitations.
 Print Date 6/30/2006

Bus Zone Activity

WEEKDAY ONLY DATA FOR SIGNUP: SPR '06 FINAL, DATED 6/27/2006

SOURCE: SEATTLE METRO APC SYSTEM

ZONE#	ON STREET	NS/FS	CROSS STREET	DIR	TIME	I/O	ROUTE	SERV	TYPE	# OF	# OF	# OF	ON	OFF	LOAD	AVG		
										UNIQUE TRIPS SEEN	TOTAL TRIPS SEEN	TIMES BUS STOPPED	AVG PSGRS	TOTAL ONS	AVG PSGRS	TOTAL OFFS	APPR AVG	NUM SEATS
43050	N 130th St	NS	Aurora Ave N	W	AM	O	345	L		5	40	30	0.4	2	0.9	5	6.9	30
43050	N 130th St	NS	Aurora Ave N	W	MID	O	345	L		13	88	82	1.1	14	1.4	18	12.4	30
43050	N 130th St	NS	Aurora Ave N	W	PM	O	345	L		6	44	43	1.6	10	1.9	11	11.5	30
43050	N 130th St	NS	Aurora Ave N	W	XEV	O	345	L		4	28	24	0.8	3	1.1	5	7.9	30
43050	N 130th St	NS	Aurora Ave N	W	XNT	O	345	L		3	22	10	0.2	1	0.5	2	3.0	30
TOTALS FOR ZONE#		43050	TOTAL TRIPS OBSERVED:							31	ONS:		30	OFFS:		40		
43110	N 130th St	FS	Aurora Ave N	E	AM	I	345	L		6	41	17	0.3	2	0.2	1	5.1	30
43110	N 130th St	FS	Aurora Ave N	E	MID	I	345	L		13	95	85	1.5	20	1.4	18	12.5	30
43110	N 130th St	FS	Aurora Ave N	E	PM	I	345	L		5	33	31	1.9	9	1.0	5	8.2	30
43110	N 130th St	FS	Aurora Ave N	E	XEV	I	345	L		4	30	24	1.8	7	0.3	1	6.8	30
43110	N 130th St	FS	Aurora Ave N	E	XNT	I	345	L		2	15	7	0.3	1	0.2	0	2.0	30
TOTALS FOR ZONE#		43110	TOTAL TRIPS OBSERVED:							30	ONS:		39	OFFS:		26		
75190	N 145th St	FS	Aurora Ave N	E	AM	I	304	L		5	31	19	0.8	4	0.0	0	19.9	42
75190	N 145th St	FS	Aurora Ave N	E	XEV	-	DHD	L		1	76	4	0.0	0	0.1	0	0.8	56
TOTALS FOR ZONE#		75190	TOTAL TRIPS OBSERVED:							6	ONS:		4	OFFS:		0		
75370	N 145th St	FS	Aurora Ave N	W	AM	-	DHD	L		1	48	2	0.0	0	0.0	0	0.6	44
75370	N 145th St	FS	Aurora Ave N	W	PM	O	304	L		4	32	26	0.1	0	1.3	5	20.4	50
75370	N 145th St	FS	Aurora Ave N	W	XEV	O	304	L		1	4	0	0.0	0	0.0	0	14.0	64
TOTALS FOR ZONE#		75370	TOTAL TRIPS OBSERVED:							6	ONS:		0	OFFS:		5		

AAM: before 6am, AM: 6-9am, MID: 9am-3:15pm, PM: 3:15-6:15pm, XEV: 6:15-9:30pm, XNT: 9:30pm-close

Please refer to "apnotes.doc" for an explanation of the terms used in this report, and a list of data limitations.

Print Date: 6/30/2006

Bus Zone Activity

WEEKDAY DATA FOR SIGNUP: SPR '06 FINAL, DATED 6/27/2006 SOURCE: SEATTLE METRO APC SYSTEM

ZONE#	ON STREET	NS/FS	CROSS STREET	DIR	TIME	TOTAL TRIPS		
						OBSERVED	TOTAL ONS	TOTAL OFFS
43050	N 130th St	NS	Aurora Ave N	W	AM	5	2	5
43050	N 130th St	NS	Aurora Ave N	W	MID	13	14	18
43050	N 130th St	NS	Aurora Ave N	W	PM	6	10	14
43050	N 130th St	NS	Aurora Ave N	W	XEV	4	3	5
43050	N 130th St	NS	Aurora Ave N	W	XNT	3	1	2
TOTAL FOR SELECTED TIME PERIOD(S) FOR ZONE # 43050:						31	30	40
43110	N 130th St	FS	Aurora Ave N	E	AM	6	2	2
43110	N 130th St	FS	Aurora Ave N	E	MID	13	20	18
43110	N 130th St	FS	Aurora Ave N	E	PM	5	9	5
43110	N 130th St	FS	Aurora Ave N	E	XEV	4	7	4
43110	N 130th St	FS	Aurora Ave N	E	XNT	2	1	0
TOTAL FOR SELECTED TIME PERIOD(S) FOR ZONE # 43110:						30	39	26
75190	N 145th St	FS	Aurora Ave N	E	AM	5	4	0
75190	N 145th St	FS	Aurora Ave N	E	XEV	1	0	0
TOTAL FOR SELECTED TIME PERIOD(S) FOR ZONE # 75190:						6	4	0
75370	N 145th St	FS	Aurora Ave N	W	AM	1	0	0
75370	N 145th St	FS	Aurora Ave N	W	PM	4	0	5
75370	N 145th St	FS	Aurora Ave N	W	XEV	1	0	0
TOTAL FOR SELECTED TIME PERIOD(S) FOR ZONE # 75370:						6	0	5

Saturday and Sunday On / Off Zone Data for Selected Zones												
Spring 2006 Signup												
Source: APC LogStop File												
								Observed	Observed		Total	Total
								Average	Average	Scheduled	Average	Average
Day	Keyzone	On Street	Cross Street	Intersect	Direction	Route(s)	In / Out	"Ons" per Trip	"Offs" per Trip	Trips	"Ons"	"Offs"
Saturday	6950	Aurora Ave N	N 145th St	FM	S	28, 358	In	2.30	1.15	103	236.99	118.60
Saturday	6990	Aurora Ave N	N 135th St	FS	S	358	In	2.43	1.86	66	160.53	123.08
Saturday	7000	Aurora Ave N	N 130th St	FS	S	358	In	2.96	0.84	66	195.60	55.47
Saturday	7010	Aurora Ave N	N 125th St	FM	S	358	In	1.62	0.69	66	106.70	45.33
Saturday	7040	Aurora Ave N	N 115th St	FS	S	358	In	0.88	0.24	66	57.97	15.82
Saturday	7050	Aurora Ave N	WASHELLI	NS	S	358	In	0.21	0.13	66	13.93	8.37
Saturday	7840	Aurora Ave N	WASHELLI ENT	FS	N	358	Out	0.07	0.06	65	4.52	3.75
Saturday	7850	Aurora Ave N	N 115th St	FS	N	358	Out	0.29	1.08	65	19.07	70.18
Saturday	7880	Aurora Ave N	N 125th St	FS	N	358	Out	0.47	1.67	65	30.78	108.60
Saturday	7900	Aurora Ave N	N 130th St	FS	N	358	Out	1.54	3.56	65	100.37	231.63
Saturday	7912	Aurora Ave N	N 135th St	FS	N	358	Out	0.68	1.81	65	43.93	117.80
Saturday	43050	N 130th St	Aurora Ave N	NS	W	345	Out	0.91	2.35	25	22.73	58.71
Saturday	43110	N 130th St	Aurora Ave N	FS	E	345	In	0.91	0.45	25	22.73	11.36
Saturday	75820	Aurora Ave N	N 145th St	FM	N	358	Out	1.30	2.28	65	84.25	148.47
Sunday	6950	Aurora Ave N	N 145th St	FM	S	28, 358	In	2.43	1.23	85	206.35	104.56
Sunday	6990	Aurora Ave N	N 135th St	FS	S	358	In	2.10	1.21	50	105.10	60.40
Sunday	7000	Aurora Ave N	N 130th St	FS	S	358	In	2.71	0.73	50	135.35	36.60
Sunday	7010	Aurora Ave N	N 125th St	FM	S	358	In	1.47	0.63	50	73.65	31.35
Sunday	7040	Aurora Ave N	N 115th St	FS	S	358	In	1.02	0.44	50	51.15	22.05
Sunday	7050	Aurora Ave N	WASHELLI	NS	S	358	In	0.07	0.05	50	3.65	2.40
Sunday	7840	Aurora Ave N	WASHELLI ENT	FS	N	358	Out	0.06	0.13	50	2.90	6.70
Sunday	7850	Aurora Ave N	N 115th St	FS	N	358	Out	0.44	1.19	50	22.25	59.55
Sunday	7880	Aurora Ave N	N 125th St	FS	N	358	Out	0.57	1.40	50	28.65	69.80
Sunday	7900	Aurora Ave N	N 130th St	FS	N	358	Out	1.30	3.26	50	65.05	162.95
Sunday	7912	Aurora Ave N	N 135th St	FS	N	358	Out	0.56	1.23	50	27.85	61.45
Sunday	43050	N 130th St	Aurora Ave N	NS	W	345	Out	0.73	1.54	17	12.33	26.17
Sunday	43110	N 130th St	Aurora Ave N	FS	E	345	In	1.08	0.57	16	17.33	9.08
Sunday	75820	Aurora Ave N	N 145th St	FM	N	358	Out	1.30	2.57	50	65.10	128.70

Bus Stop Activity Report – Explanatory Notes

The bus stop activity report is an aggregation of bus passenger loading (ons and offs) data collected by Metro's Automatic Passenger Counter (APC) system. The information shown in this report is based on a sample of data collected during an entire service period (e.g., the Fall service period runs between early September and early February). These notes are intended to assist in interpretation of the Bus Stop Activity Report by interpreting the terms and headings used in the report, and by describing the limitations of the report. The underlined terms and headings refer to the headings used in the print version of the report. The field columns used in electronic Desktop APC Application are noted in parentheses when different terms are used.

TERMS AND HEADINGS

Header Information: The most important information contained in the header is the service period name. There are three service periods per year: Spring (early February to early June), Summer (early June to early September), and Fall (early September to early February). Typically, ridership is higher during the Fall and Spring service periods and lowest during the Summer service period.

Zone#: The zone# is a two- to five-digit number representing a unique bus stop, or zone. There may be more than one zone associated with what may appear to be a single bus stop. For example, each bay at a transit center has a unique zone number. Data from each zone requested are shown separately.

On Street: On Street gives the name of the street on which the zone is located.

NS/FS (Inter): NS/FS is a two-letter abbreviation that references the location of the zone with respect to the nearest cross street. The abbreviations used are as follows:

AT at
 BT between
 FM far side of the intersection, mid block
 FS far side of the intersection
 NM near side of the intersection, mid block
 OP opposite, or across from

Cross Street: This field gives the nearest cross street to the zone.

Dir: This field indicates the bus's direction of travel.

Period: This field indicates the time period, using the following abbreviations:

AAM before 6:00 am
 AM 6:00 am – 9:00 am
 MID 9:00 am – 3:15 pm
 PM 3:15 pm – 6:15 pm
 XEV 6:15 pm – 9:30 pm
 XNT 9:30 pm – end of service

I/O (InOut): this indicates whether the trip is inbound (I) or outbound (O). For most trips, "I" indicates the trip is traveling toward downtown Seattle, and "O" indicates the trip is traveling away from downtown Seattle.

Route (SignRt): This field contains the route number. Occasionally, some trips are assigned to route 0 (zero), which indicates the bus just completed or is just starting revenue service and the APC system is unable to discern the bus' route.

Type Serv (Ex): This field indicates whether the trip is local (L) or express (E).

of Unique Trips Seen (ObsTrips): This field gives the number of unique scheduled trips sampled by the APC system during the service period. For example, the trip of route 101 that leaves the University Street Station for Renton every weekday at 4:08 is a unique trip. If the system were to collect data on this trip on two different occasions during a given service period (e.g., on April 20 and May 4), this would count as a single unique trip.

of Total Trips Seen (TotalObs): This indicates the total number of trips of a given route in a given direction for which the APC system collected data during a given service period. To clarify the difference between unique and total trips, if the APC system were to observe one trip five times and another trip ten times, the Bus Stop Activity report would indicate two unique trips and fifteen total trips.

Bus Stop Activity Report – Explanatory Notes

of Times Bus Stopped (Stops): This field gives the number of times the bus actually stopped at this stop, out of the number of total trips seen.

On Avg Psgrs (AvgOns/Trip): This field shows the average number of passengers boarding (or deboarding, if offs) the route per trip at this stop, based on the # OF UNIQUE TRIPS SEEN.

Total Ons (OnsObs): This field equals the # OF UNIQUE TRIPS SEEN multiplied by ON(OFF) AVG PSGRS. This is the average total number of Ons(Offs) for a single weekday (for a given route during the specified time period).

Load Appr Avg (AvgArrLoad/Trip): This field indicates the average passenger load on the bus as it approached the zone, based on the # OF UNIQUE TRIPS SEEN.

Avg Num Seats (AvgSeats/Trip): This gives the average number of seats on buses assigned to these routes, based on the # OF UNIQUE TRIPS SEEN.

LIMITATIONS

The APC system is Metro's primary source of ridership and travel time information and is the only source of detailed information at the bus stop level. Overall, the accuracy of the data collected is very good, since about 95% of the unique trips are sampled during a given service period, and many of these trips are sampled three or more times. However, the data does have several limitations.

First, the APC system does not collect any data on subcontracted service. As a result, to the extent that subcontracted service stops at a given stop and riders board and alight such service at that stop, total ons and offs for that stop will be low.

Another limitation of the data collected by the APC system is that, due to the automated nature of the system, ons and offs are occasionally incorrectly assigned to a bus zone just before or after the correct zone. To verify boardings and alightings that seem unusually high or low, it is helpful to examine data from other service periods to determine whether data from those service periods are similar. Also, one should examine data for one or two bus zones on either side of the zone of interest.

A third shortcoming of the APC data is the lack of sufficient data on a small number of unique trips. The goal of the APC system is to collect at least three observations from every unique trip Metro operates. However, because of the automated nature of the system, as well as the large amount of data collected, the system does not achieve the three observations for benchmark for every route. For a given trip, the system may actually make fewer than three observations or some of the observations collected may be lost, due to processing errors.

While most trips have at least three observations, some trips have only one or two observations, and a few trips have no valid APC data available. The fewer times a given trip is observed, the more prone data from that trip is to be skewed by a non-typical observation. When no APC data is available for a given trip, total ons and offs at individual bus zones may be low.

A final limitation of the data, related to the shortcoming just described, is the accuracy of the data in providing information at different levels of aggregation. As with all collections of data, APC data is most accurate at highly aggregated levels, such as system- or district-wide ons and offs. As the "slice" of data to be examined becomes smaller, it also becomes more subject to being skewed by non-typical data. For example, a major accident that closes down I-5 for one day will not affect system-wide data collected over an entire service period. However, such an accident may radically affect data from bus trips that usually operate on I-5 and whose vehicles were equipped with passenger counters on the day of the accident. If only two observations of a particular unique trip are collected during a service period, and one of these observations occurred on the day of the accident, then half of the data available on the trip would be skewed.

Bus Stop Activity Report – Explanatory Notes

As with any data source, the above limitations point to a need to perform a “reality check” on the data in the Bus Zone Activity report. The following types of questions might be asked regarding the data shown in the report:

Do the bus routes shown on the report match those that actually stop at the zone(s)?

For any given route and time period, does the # OF UNIQUE TRIPS SEEN equal the scheduled number of trips?

Do the ons and offs for each route appear reasonable?

The weaknesses described above do not detract from the usefulness of APC data, especially at an aggregate level. It is the only source of detailed information on the bus stop level and planners frequently used this data to help determine where to add, delete, or change bus service.

Appendix C

FINAL

City of Seattle
Aurora Avenue North Transit, Pedestrian and Safety
Improvement Project

Traffic Operations Technical Memorandum
Methods and Assumptions

PREPARED FOR: Diana Holloway/SDOT

PREPARED BY: Eric Shimizu/CH2M HILL
 Tim Newkirk/CH2M HILL

DATE: January 23, 2006 (revised April 10, 2006)

This memorandum outlines the methods and assumptions that will be used for the Seattle Aurora Corridor project. One goal of this memo is to achieve consensus within the project team which will help produce consistent and defensible analysis. This memo will identify the analysis years and study area limits. Travel demand forecasting and modeling methodologies will be defined. In addition, traffic analysis scenarios and the software that will be used to support design decisions will be identified. Lastly, the operations parameters and assumptions will be outlined.

Analysis Years

The AM and PM peak hours will be analyzed for each scenario in Table 1.


- Existing Year (2005)
- Year of Opening (2010)
- Design Year (2030)

TABLE 1
 Traffic Analysis Scenarios

Condition	Existing (2005)	Year of Opening (2010)	Design Year (2030)
Existing	AM and PM		
No-Build			AM and PM
Build		AM and PM	AM and PM

Study Area Limits

The study area for this project is defined as Aurora Avenue North between North 110th Street and North 145th Street in the City of Seattle (see Figure 1). This is approximately 1.7 miles and includes eleven (11) study intersections. Other intersections or mid-block driveways may be added to the traffic model, but will first require PM approval from CH2M HILL and the CITY for change management and adjustment to the current scope of work (SOW).

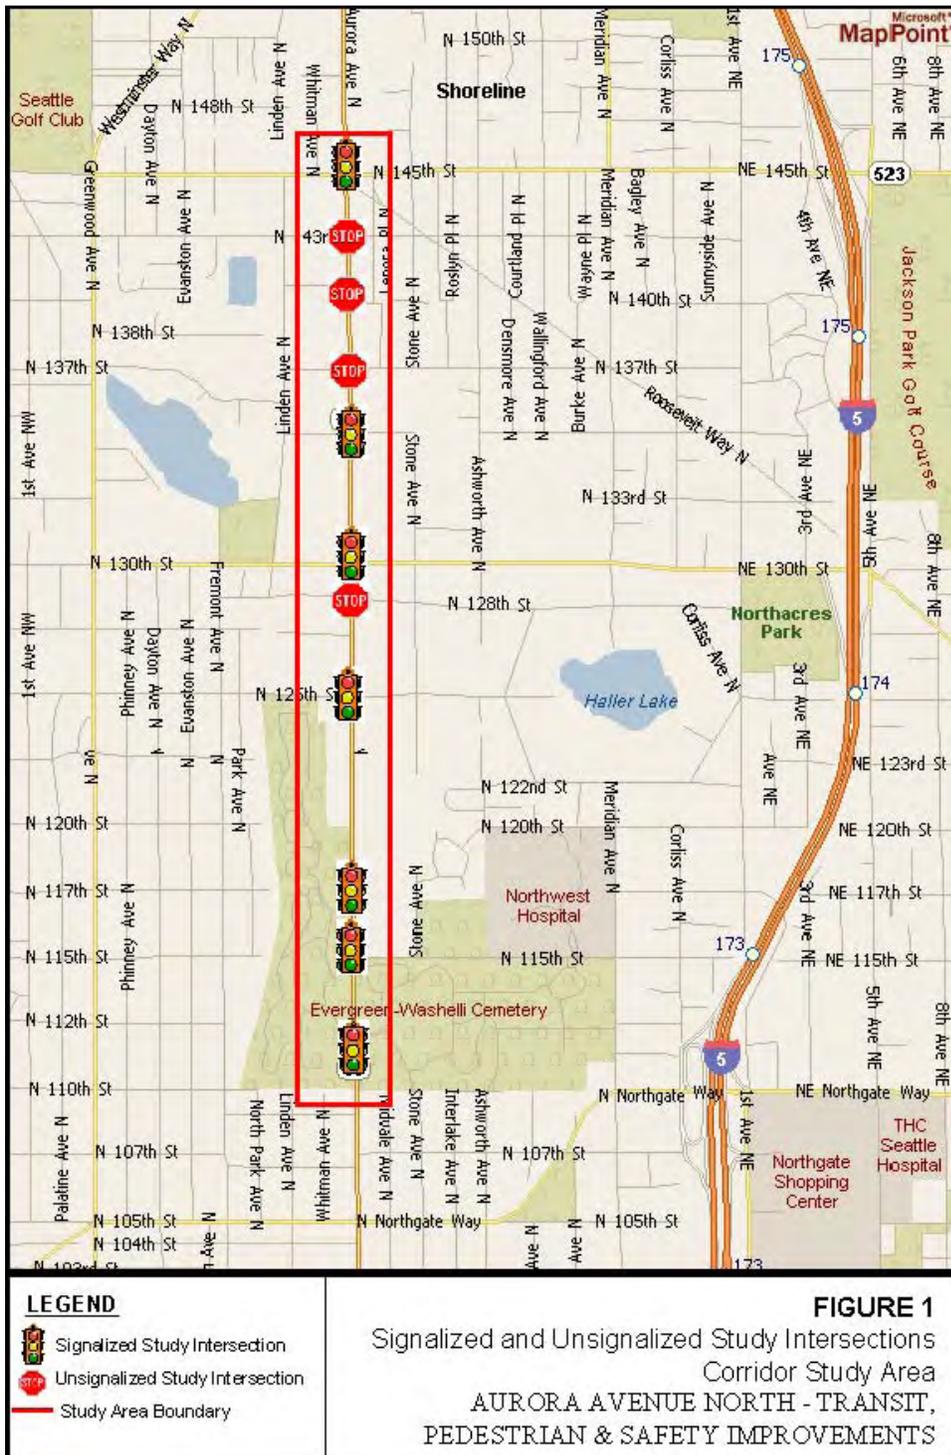

Forecasting/Modeling Methodology

As directed by the Scope of Work (SOW), CH2M HILL obtained from the City of Seattle and the Puget Sound Regional Council's latest calibrated EMME/2 travel demand model. At the coordination meeting on July 26, 2005, CH2M HILL suggested an AM peak hour growth rate of **0.85** percent per year and a PM peak hour growth rate of **1.23** percent per year as an alternative to the **1.21** percent per year growth rate for both peak periods. All three growth rates were derived from the PSRC's travel demand model. The City agreed that separate growth rates for each peak period were acceptable.

The growth rates will be applied to the final 2005 AM and PM peak hour traffic volumes to reach forecasted 2010 and 2030 traffic volumes. The traffic volumes will be rounded to the nearest 5 vehicles; if less than 5 vehicles are present it will remain that value. The 2030 traffic volumes will be used for both Build and No-Build scenarios.

Operational Analysis Methods/Parameters

General Parameters

Existing conditions will be represented by data from the year 2005. In addition, the City of Seattle's model will be used to forecast both AM and PM volumes for the year of opening (2010) and the design year (2030).

Existing AM and PM Peak Hour Scenarios

In order to understand existing travel patterns, the Synchro model developed during the Route Development Plan process, and provided by the City, will be used as the base conditions. The Synchro files will be updated to reflect existing (2005) conditions. In addition, volumes will be balanced between intersections for consistency.

Intersection Analysis

Software

All intersection analysis will be performed using the Synchro software package (version 6). This software implements methods from the Highway Capacity Manual (HCM) and will be used to analyze both signalized and unsignalized intersections. The level-of-service (LOS), intersection delays (per vehicle), and lane group queuing results will be reported using Synchro methodology, which is accepted by WSDOT.

BAT Lane Coding

The curb lane (Lane #1) will be marked as a Business Access and Transit (BAT) lane in both directions along Aurora Avenue. This lane will operate as a normal right-turn lane for general purpose vehicles at controlled intersections, but transit vehicles will be allowed to continue through the intersection. In the Synchro model, this lane will be coded as a general purpose right-turn lane that drops and does not permit through vehicles because Synchro does not have the ability to model a BAT lane. Also, no adjustments will be made to the existing or forecasted approach volumes because buses make up a small portion of the right-turn volume.

Study Area

Synchro results will be reported for eleven (11) total intersections, seven signalized intersections and four unsignalized, within the Aurora Corridor study area. The intersections are listed in Table 2.

TABLE 2
Study Intersections

Intersection Type	Intersecting Street
Signalized (7)	N. 112th Street
	N. 115th Street
	N. 117th Street
	N. 125th Street
	N. 130th Street
	N. 135th Street
	N. 145th Street
Unsignalized (4)	N. 128th Street
	N. 137th Street
	N. 140th Street
	N. 143rd Street

Intersection Parameters

Refer to Table 3 for a list of all intersection parameters/inputs that will be assumed for this project.

TABLE 3
Arterial Operations Parameters/Assumptions

Arterial Intersection Parameters	Condition		
	Existing	2010 - Year of Opening	2030 - Design Year
Peak Hour Factor	From traffic count and by approach	0.92 for intersection	0.92 for intersection
Conflicting Bikes and Pedestrian per Hour	From traffic count, otherwise assume 20 peds/bikes	Assume 1% growth in number of conflicting pedestrians	Assume 1% growth in number of conflicting pedestrians
Area Type	"Other"	Same as Existing	Same as Existing
Ideal Saturation Flow Rate (for all mvmts)	1,900 passenger cars per hour green per lane	Same as Existing	Same as Existing
Lane Width	From CAD files	Based on design	No-Build: Same as Existing Build: Based on design
Percent Heavy Vehicles	From traffic count, otherwise 2%	Same as Existing	Same as Existing
Percent Grade	From CAD files	Based on design	No-Build: Same as Existing Build: Based on design
Parking Maneuvers per	No parking maneuvers	Same as Existing	Same as Existing

TABLE 3

Arterial Operations Parameters/Assumptions

Arterial Intersection Parameters	Condition		
	Existing	2010 - Year of Opening	2030 - Design Year
Hour			
Bus Blockages	Headway information provided by transit agencies	Assume 1% growth in number of transit stops	Assume 1% growth in number of transit stops
Intersection signal phasing and coordination	From current timing plans provided by City of Seattle	Optimized by Synchro	Optimized by Synchro
Intersection signal timing optimization limits	From current timing plans provided by City of Seattle	Between 60-160 seconds	Between 60-160 seconds
Minimum Green time	From current timing plans provided by City of Seattle	Based on pedestrian times (7 sec. walk and 3.5 feet per second for FDW clearance) 10 sec. if no crosswalk 15 sec. for protected LT phase 10 sec. for prot/perm LT phase	Based on pedestrian times (7 sec. walk and 3.5 feet per second for FDW clearance) 10 sec. if no crosswalk 15 sec. for protected LT phase 10 sec. for prot/perm LT phase
Yellow and all-red time	From current timing plans provided by City of Seattle	New signals: (Y) = 3.5 seconds and (R) = 1 second	New signals: (Y) = 3.5 seconds and (R) = 1 second
Right Turn on Red	Allow	Allow	Allow
Right Turn Overlaps	From current timing plans provided by City of Seattle	Identify if used	Identify if used
95th percentile vehicle queues calculated based on an average of 25 feet per vehicle	Yes	Yes	Yes
Level of service goals (for mitigation) per HCM 2000	N/A	LOS E (signalized intersections from Synchro, unsignalized intersections from the HCM)	LOS E (signalized intersections from Synchro, unsignalized intersections from the HCM)

LOS, delay, and vehicle queues will be reported from Synchro.