



PIKE PLACE MARKET
1916 PIKE PLACE, SUITE 13
Bounty of the Salish Sea



Agenda

- Goals & Objectives
- Existing Conditions & Context
- Concept Design



Goals & Objectives



Support Local Producers

Celebrate Products from the Salish Sea

Curate a Unique, Immersive Experience

Bounty of the Salish Sea (Bounty) is a retail store that celebrates the natural resources, traditions, and products of the Salish Sea region. The store offers a variety of goods featuring seaweed, salmon, and seafood, along with soaps, candles, pet treats, and other locally inspired products.

To help customers learn about and experience these products, Bounty includes several interactive offerings. Light food service demonstrates how seaweed and seafood can be used in everyday cooking, while a seaweed foot spa showcases the wellness benefits of seaweed. Together, these experiences support Bounty’s mission of educating customers and encouraging the use of Salish Sea products in daily life.



Goals & Objectives

MHC Sections Referenced

3.4 Design of individual Business Spaces

3.4.1 Shop fronts

- (a) Merchandise must be easily visible from the main pedestrian ways. Open shop fronts are preferred.
- (b) Visibility into windows and storefronts should not be obscured by displays or other items above 3 ½ feet from either the exterior finished floor or the exterior grade.

3.4.2 Interior Finishes

- (a) Ceilings and walls should be light in color and should not incorporate unusual effects such as flocked wallpaper, spangles or glittered plaster, and should not imitate other materials such as stone, brick or wood.
- (c) Floor coverings should be utilitarian and easily cleaned. For example, wood, ceramic tile, linoleum, vinyl, concrete and asphalt composition materials are acceptable. Carpet or imitations of wood, brick, tile, or stone are generally unacceptable.

3.4.3 Displays


- (f) Recommended materials for display fixtures and other furnishings are wood surfaces painted in solid colors, solid color laminates, metal (bare or painted a solid color), and glass. They should not attempt to imitate any other material.

3.5 Lighting

3.5.1 Incandescent lighting has been traditionally used in the Market, and reinforces the historically warm qualities of the buildings. New technologies provide a variety of lighting solutions. New lighting designs should approximate the warmth and quality of historical lighting in the Market.

3.6 Signs


3.6.1 Signs should be simple, clear, of modest size, and painted with plain lettering styles. Lighting should be subdued, incandescent or neon.

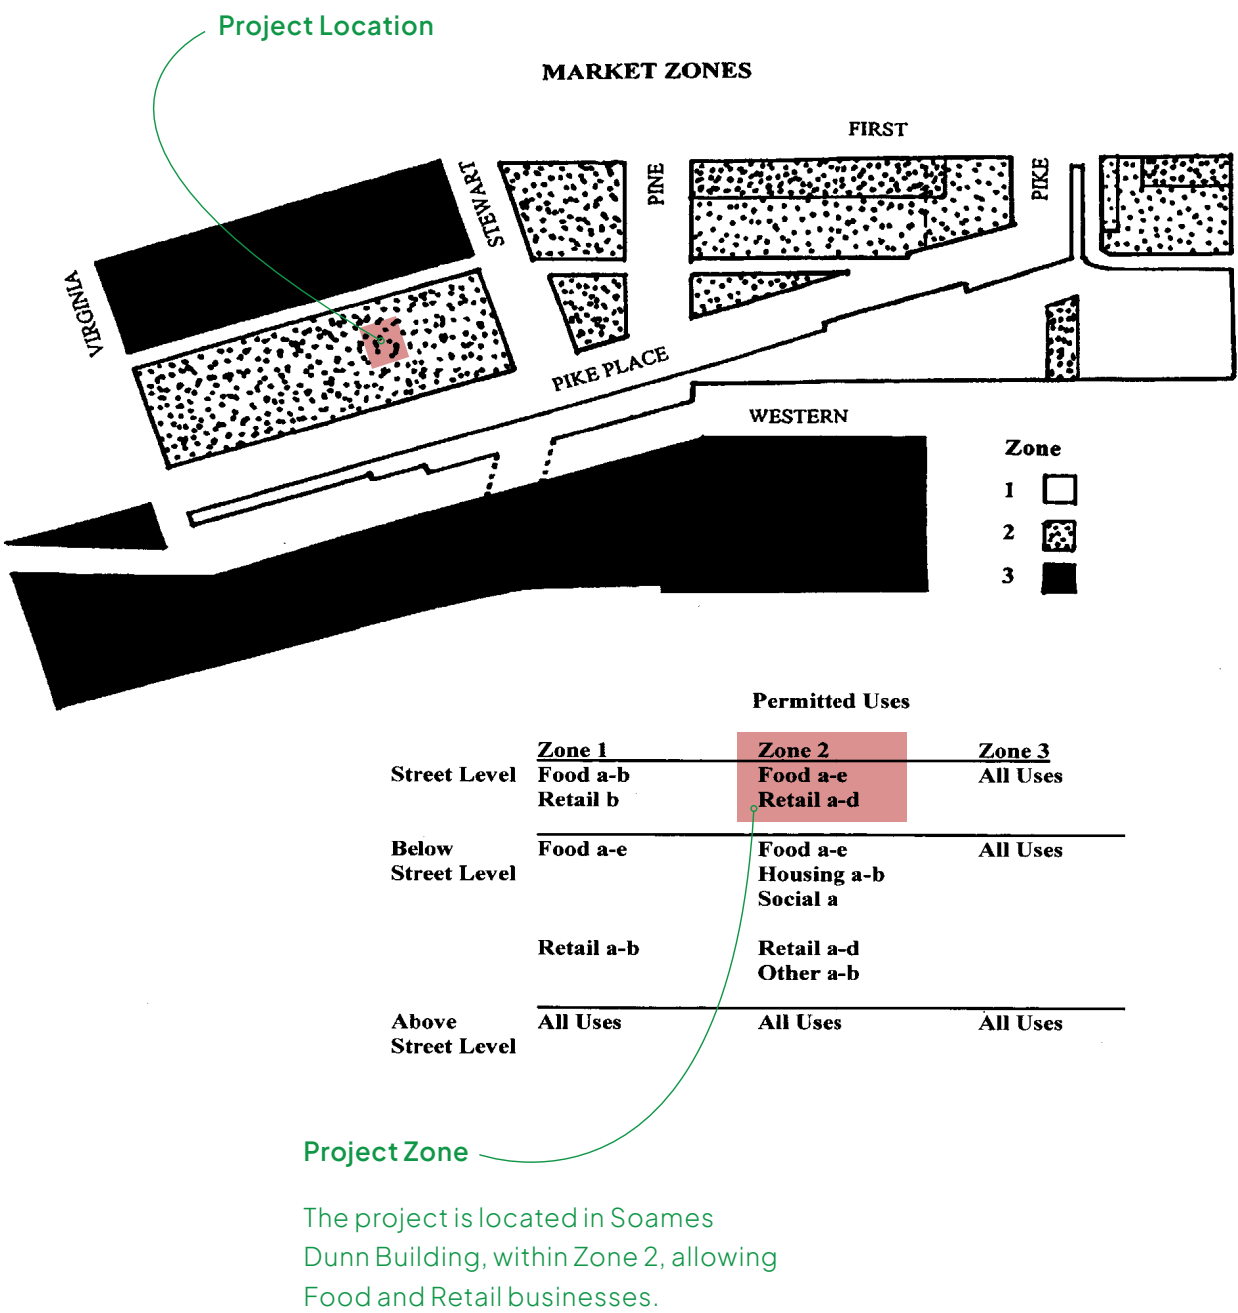

Site Context

TOTAL AREA:
792 sq ft


VICINITY MAP

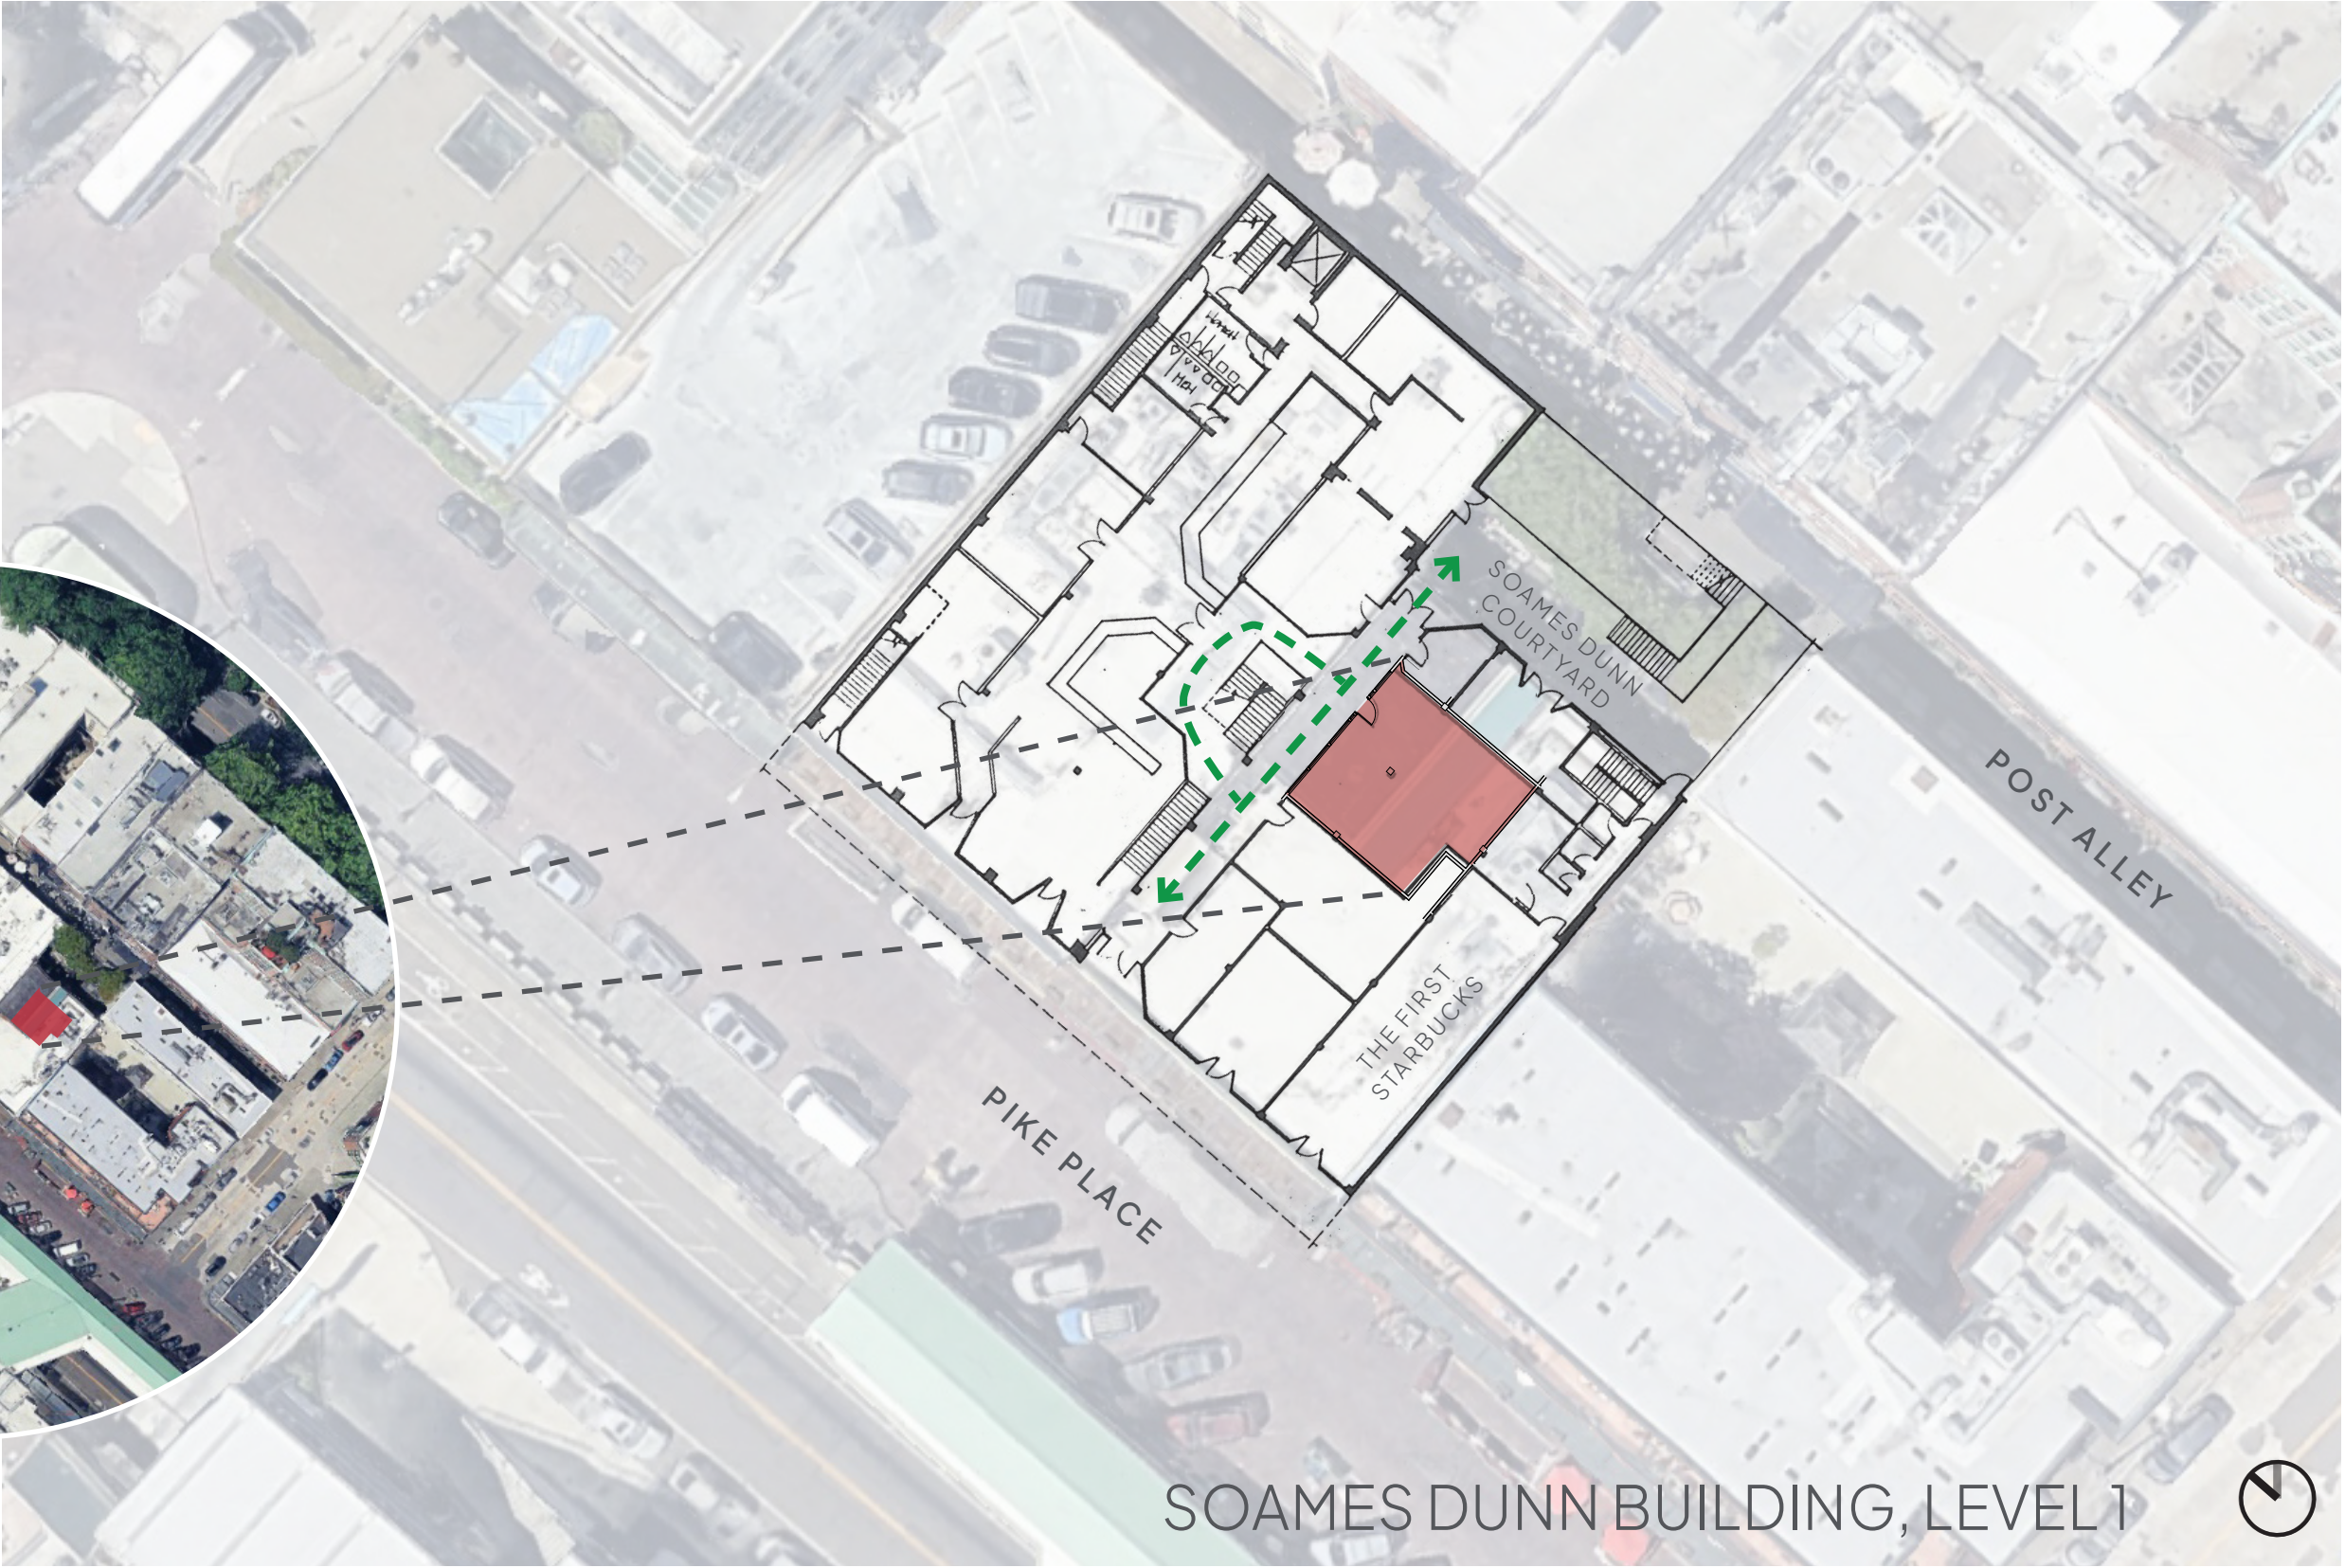



SOAMES DUNN BUILDING, LEVEL 1




Existing Conditions

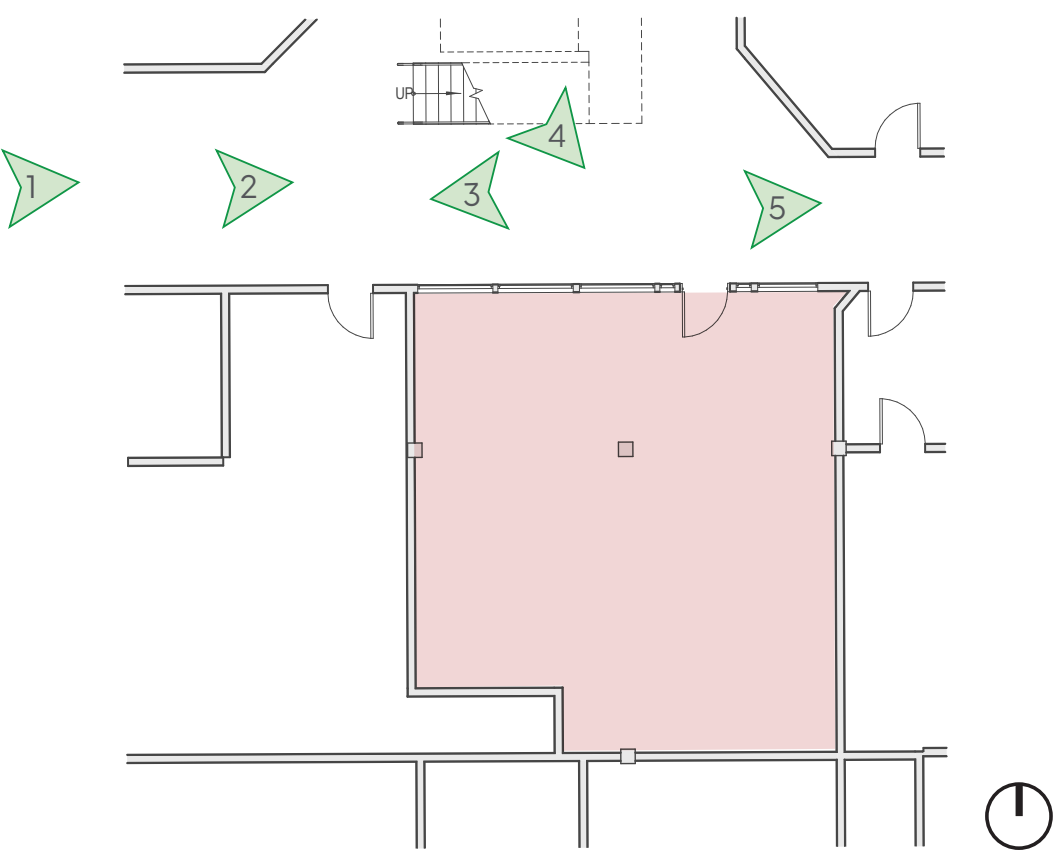


Existing Conditions

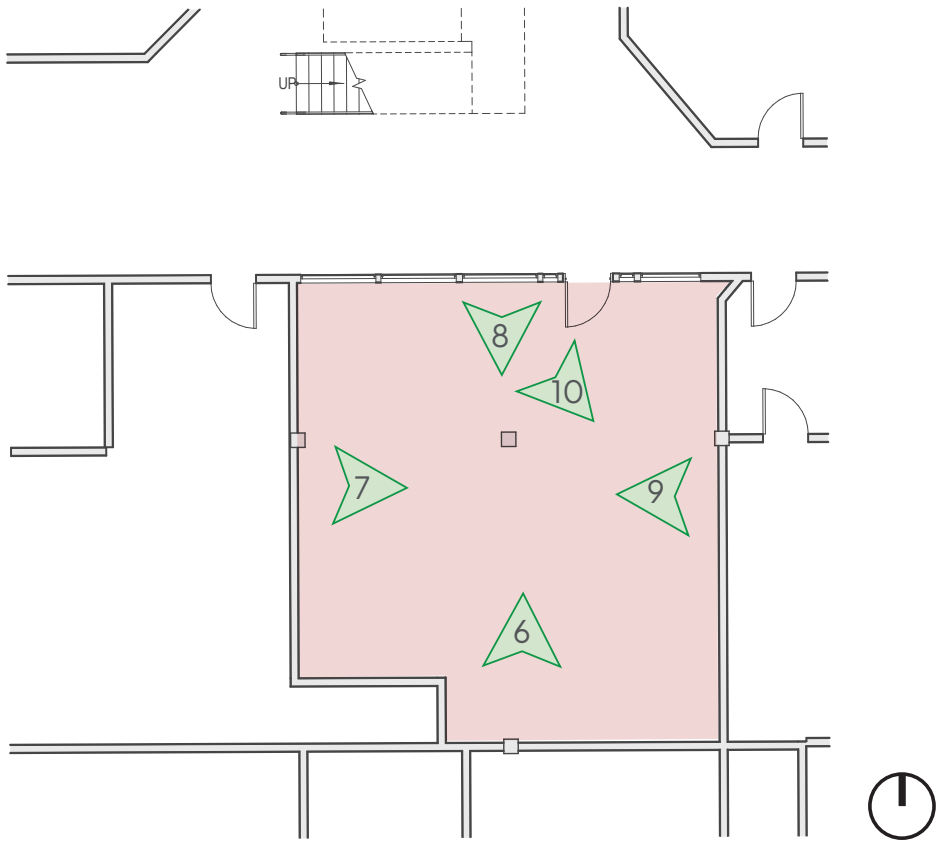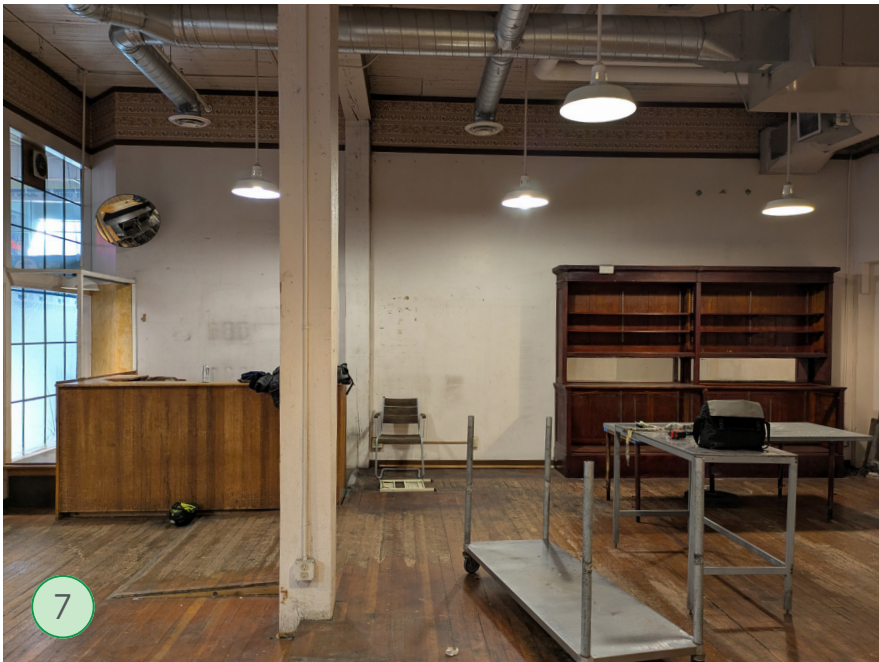

Existing Conditions - Demo Floor Plan


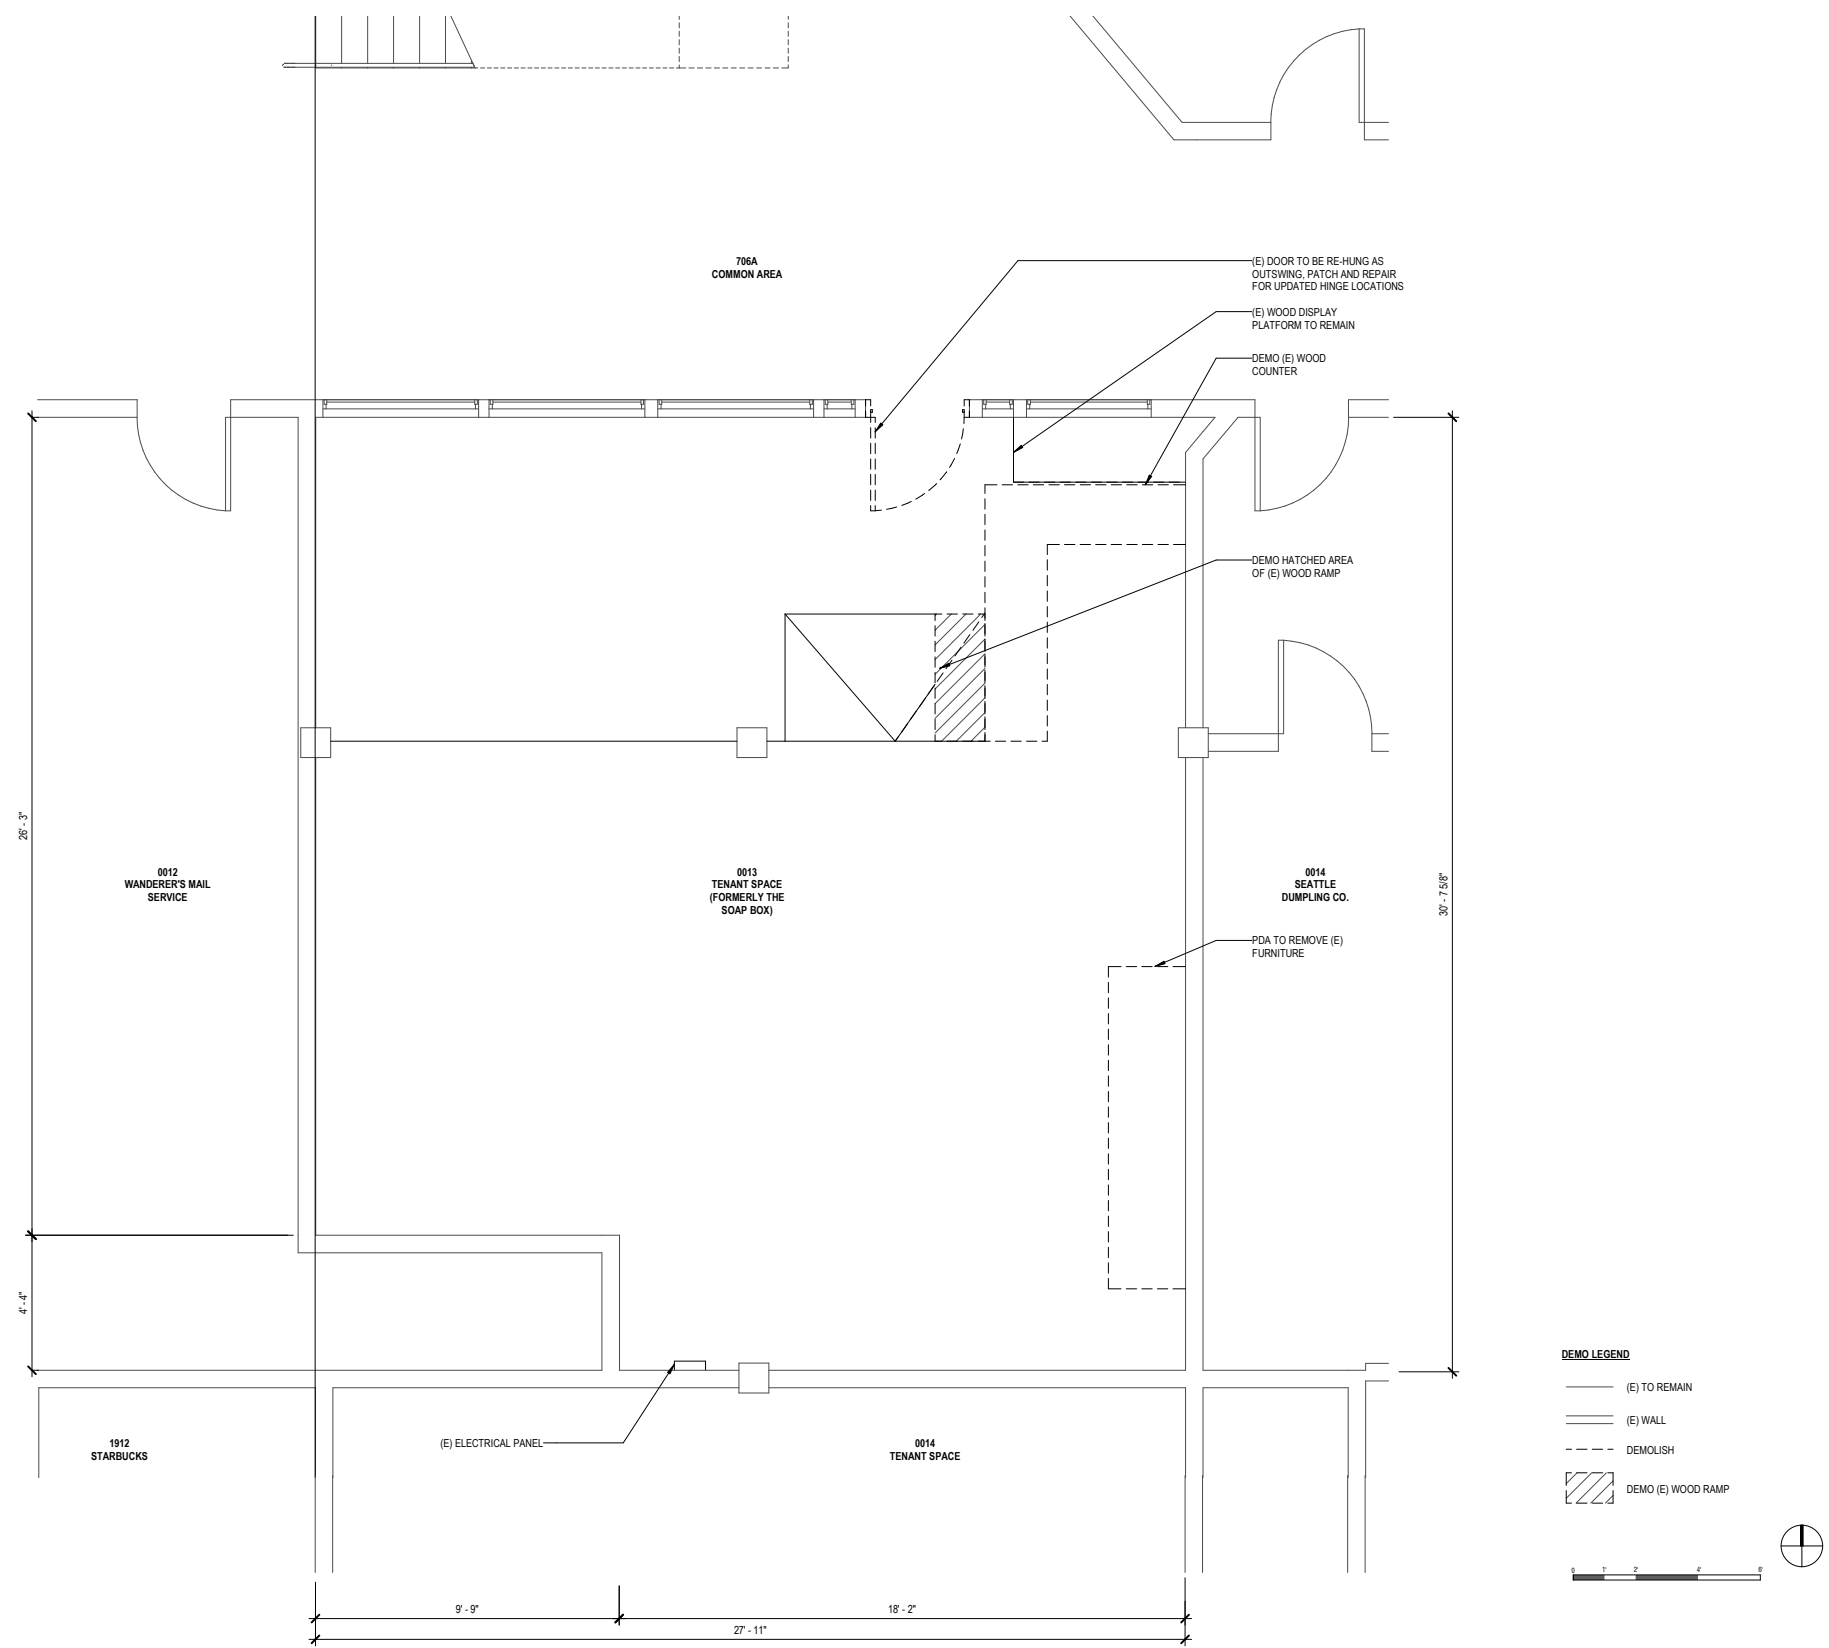


Design Proposal - Floor Plan

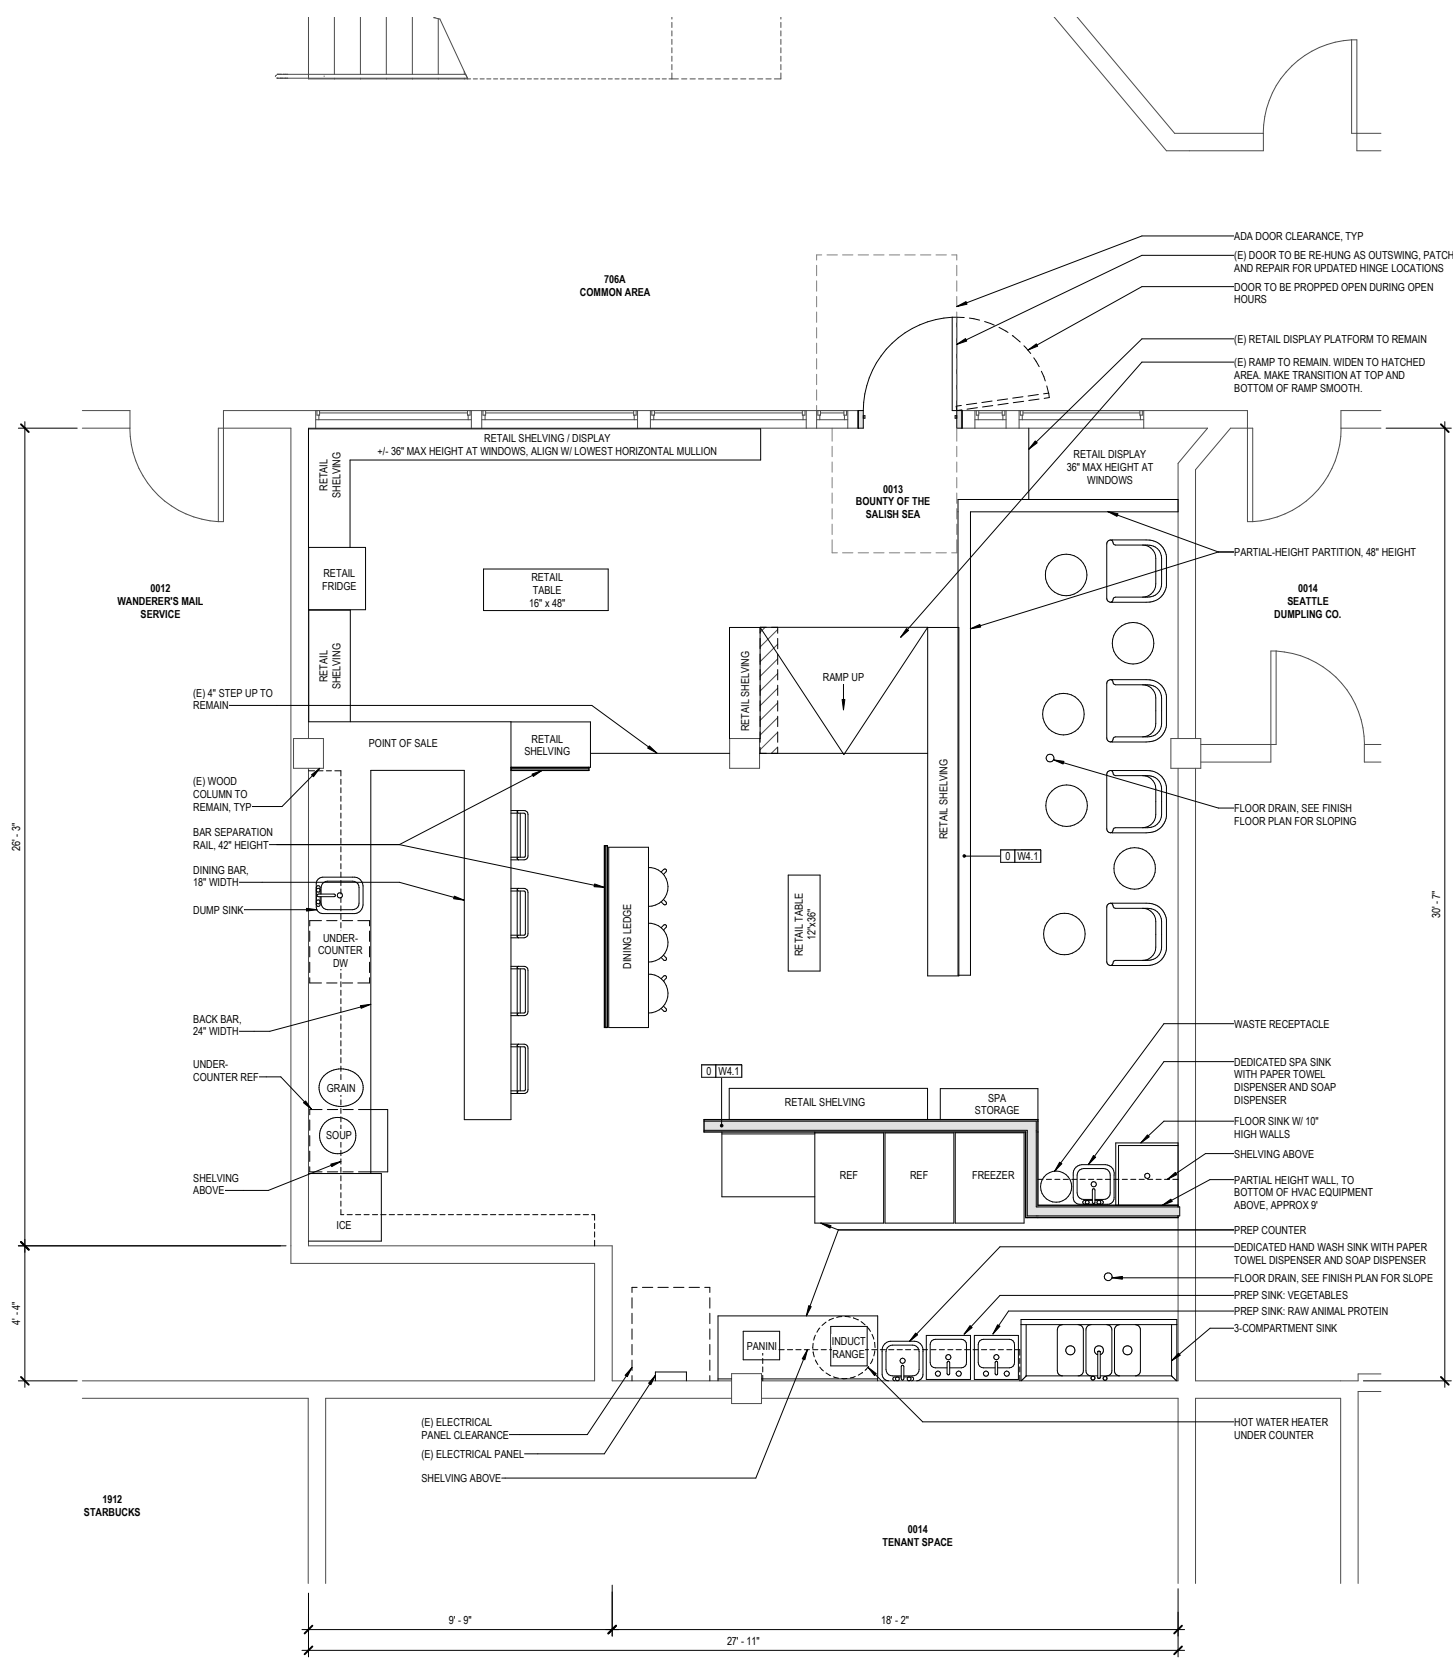

GENERAL NOTES

1. TENANT TO USE EXISTING MOP SINK LOCATED IN CUSTODIAL CLOSET NEAR PUBLIC RESTROOMS.

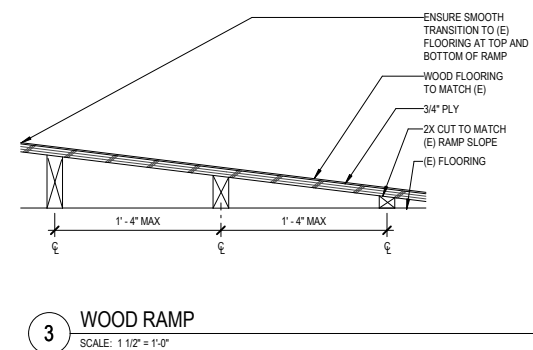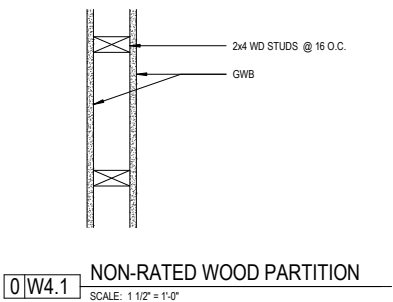


PLAN LEGEND

(E) WALL TO REMAIN

NEW WALL



Design Proposal - Foot Spa Proces

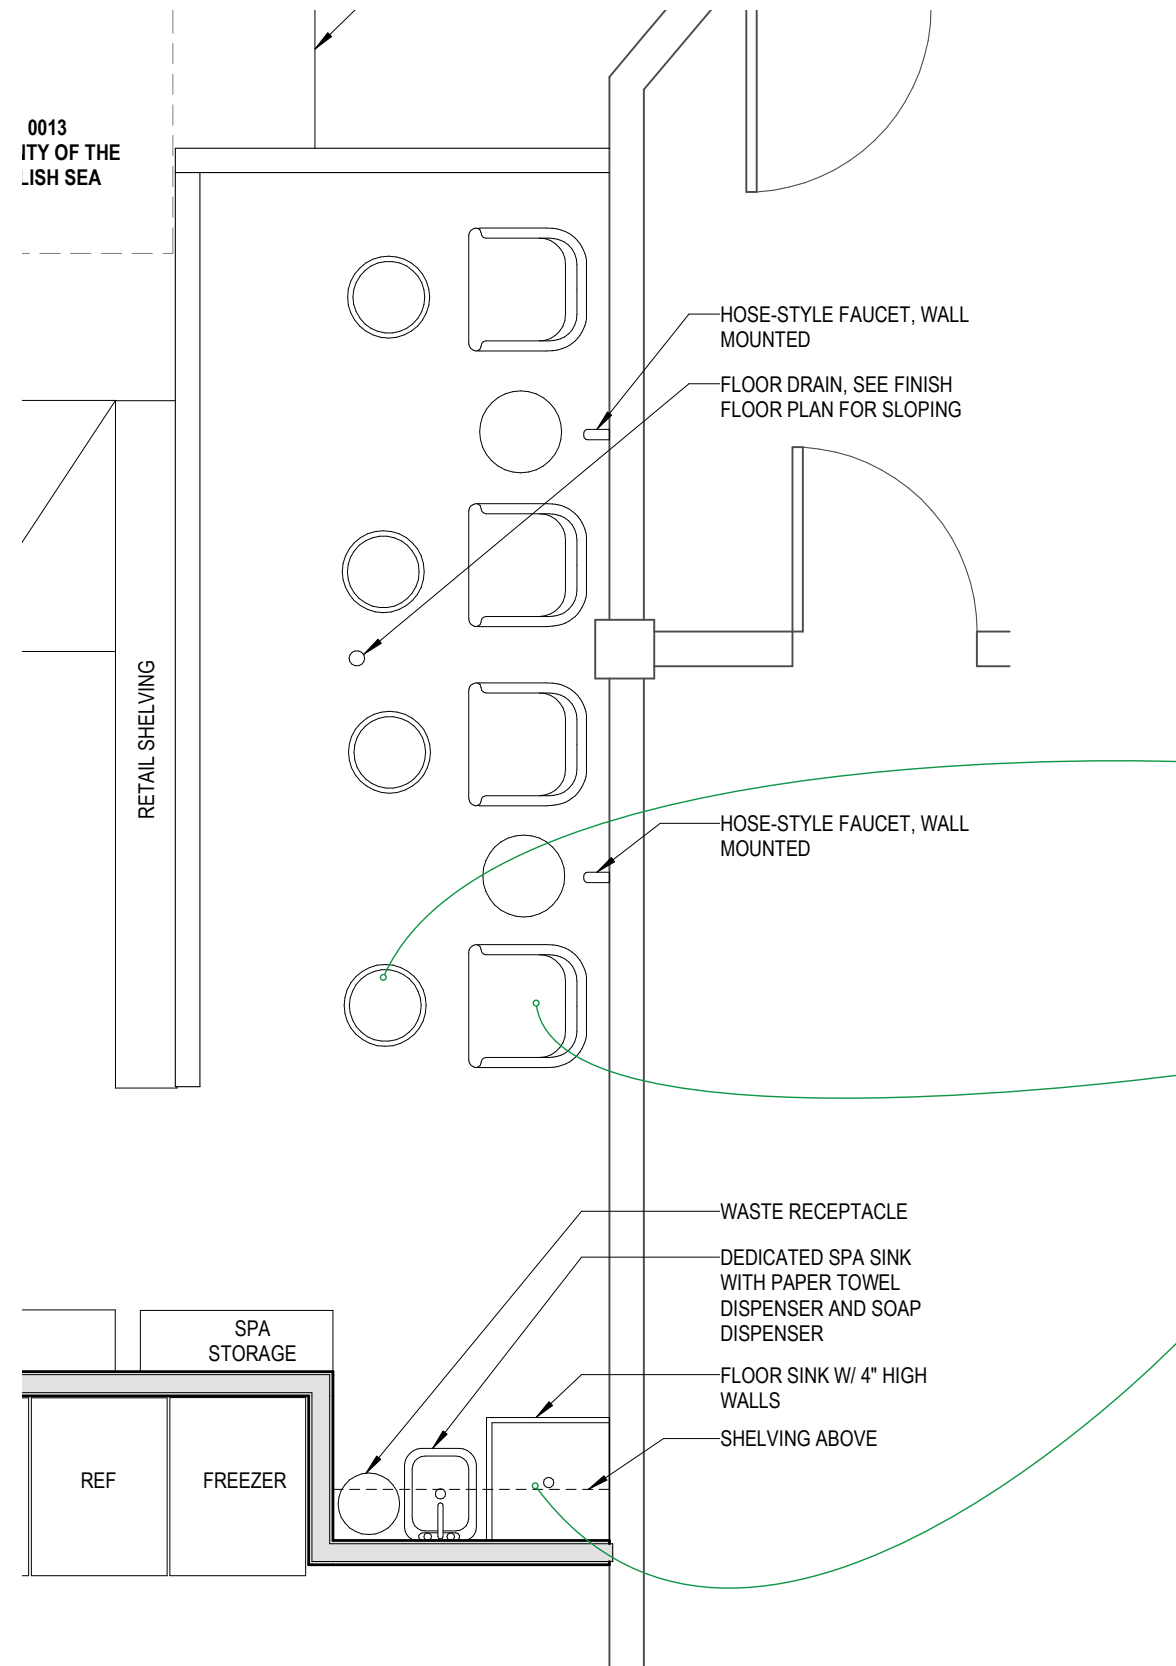

Foot Baths

Wood and copper foot baths are designed to be easily maneuvered, cleaned, and sanitized by a single staff member. Each bath holds approximately 2.5–3 gallons of water and weighs approximately 25–30 pounds when full.

- 1 Baths are Filled Up**
Foot baths are filled in the spa area using hot water from the wall-mounted hose faucets. A kelp infusion is prepared at the dedicated spa sink and then added to each bath.
- 2 Guests Relax**
Guests place their feet in the baths and enjoy their experience.
- 3 Baths are Cleaned & Reset**
After use, staff carry the baths to the spa floor sink. The kelp is removed from the water, and the remaining water is emptied into the floor sink. A drain strainer captures any remaining kelp material. The baths are then thoroughly cleaned and sanitized at the sink before being returned to service.



Design Proposal - Kelp Forest


Storefront Exterior Elevation

Kelp Forest Installation

- Kelp installation to be hung from ceiling, and be located at the height of the upper storefront windows.
- Sprinkler spray radii to remain clear.
- See page 123 for locations.

Open Window Display

- Main windows to remain open for clear visibility into shop space.

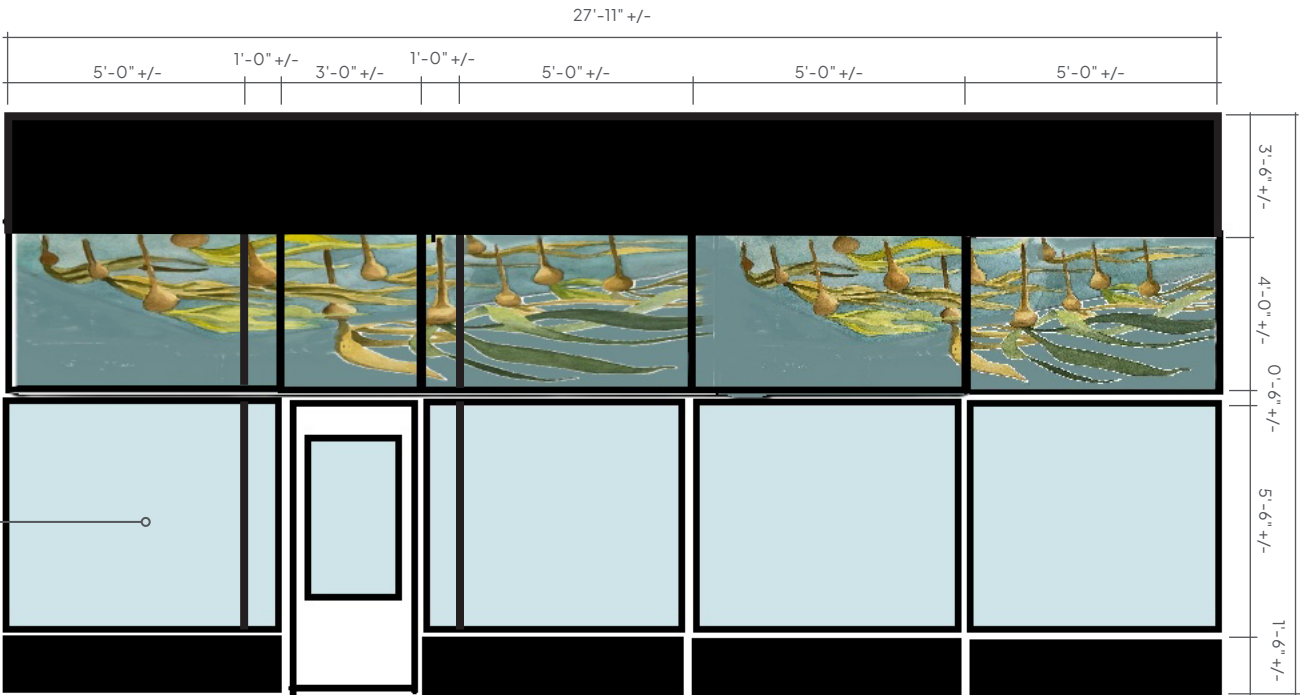

Store Front Elevation from public walkway, Soames Dunn Building, Level 1.

Projection

Projector

- Projector to be hung from ceiling.
- Model: Onoayo ONO5Pro 2.0
- Mounting System: Putorsen Adjustable Projector Ceiling Mount (see appendix). Mount into beam with wood screws.

Content

- Content to be projected onto east wall at approximately 6' width x 4' height.
- Projected content to include under-water footage of kelp forests.



Kelp Forest Details

Wire Hanging System

- Installation via aircraft cable suspension system. Mounting brackets to be screwed into existing decking at ceiling.

Kelp


- Materials to be fire retardant.
- Lightweight construction: flexible tubing, fabric, wire.
- Blown glass bull kelp bulbs.

Lighting

- "Water Lights Projector" to create water-like movement.
- Dispersed LED "fairy" lights.



Concept sketch of Kelp Forest ceiling installation.

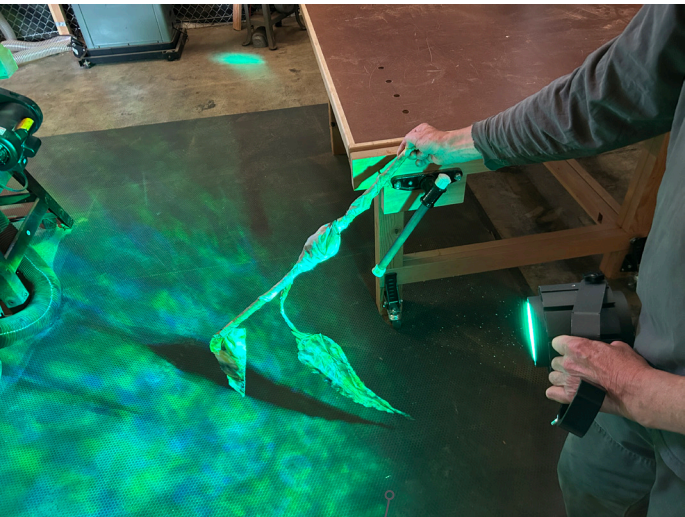


Prototype Testing.




LED "Fairy" Lights



Design Proposal - Kelp Forest Section View

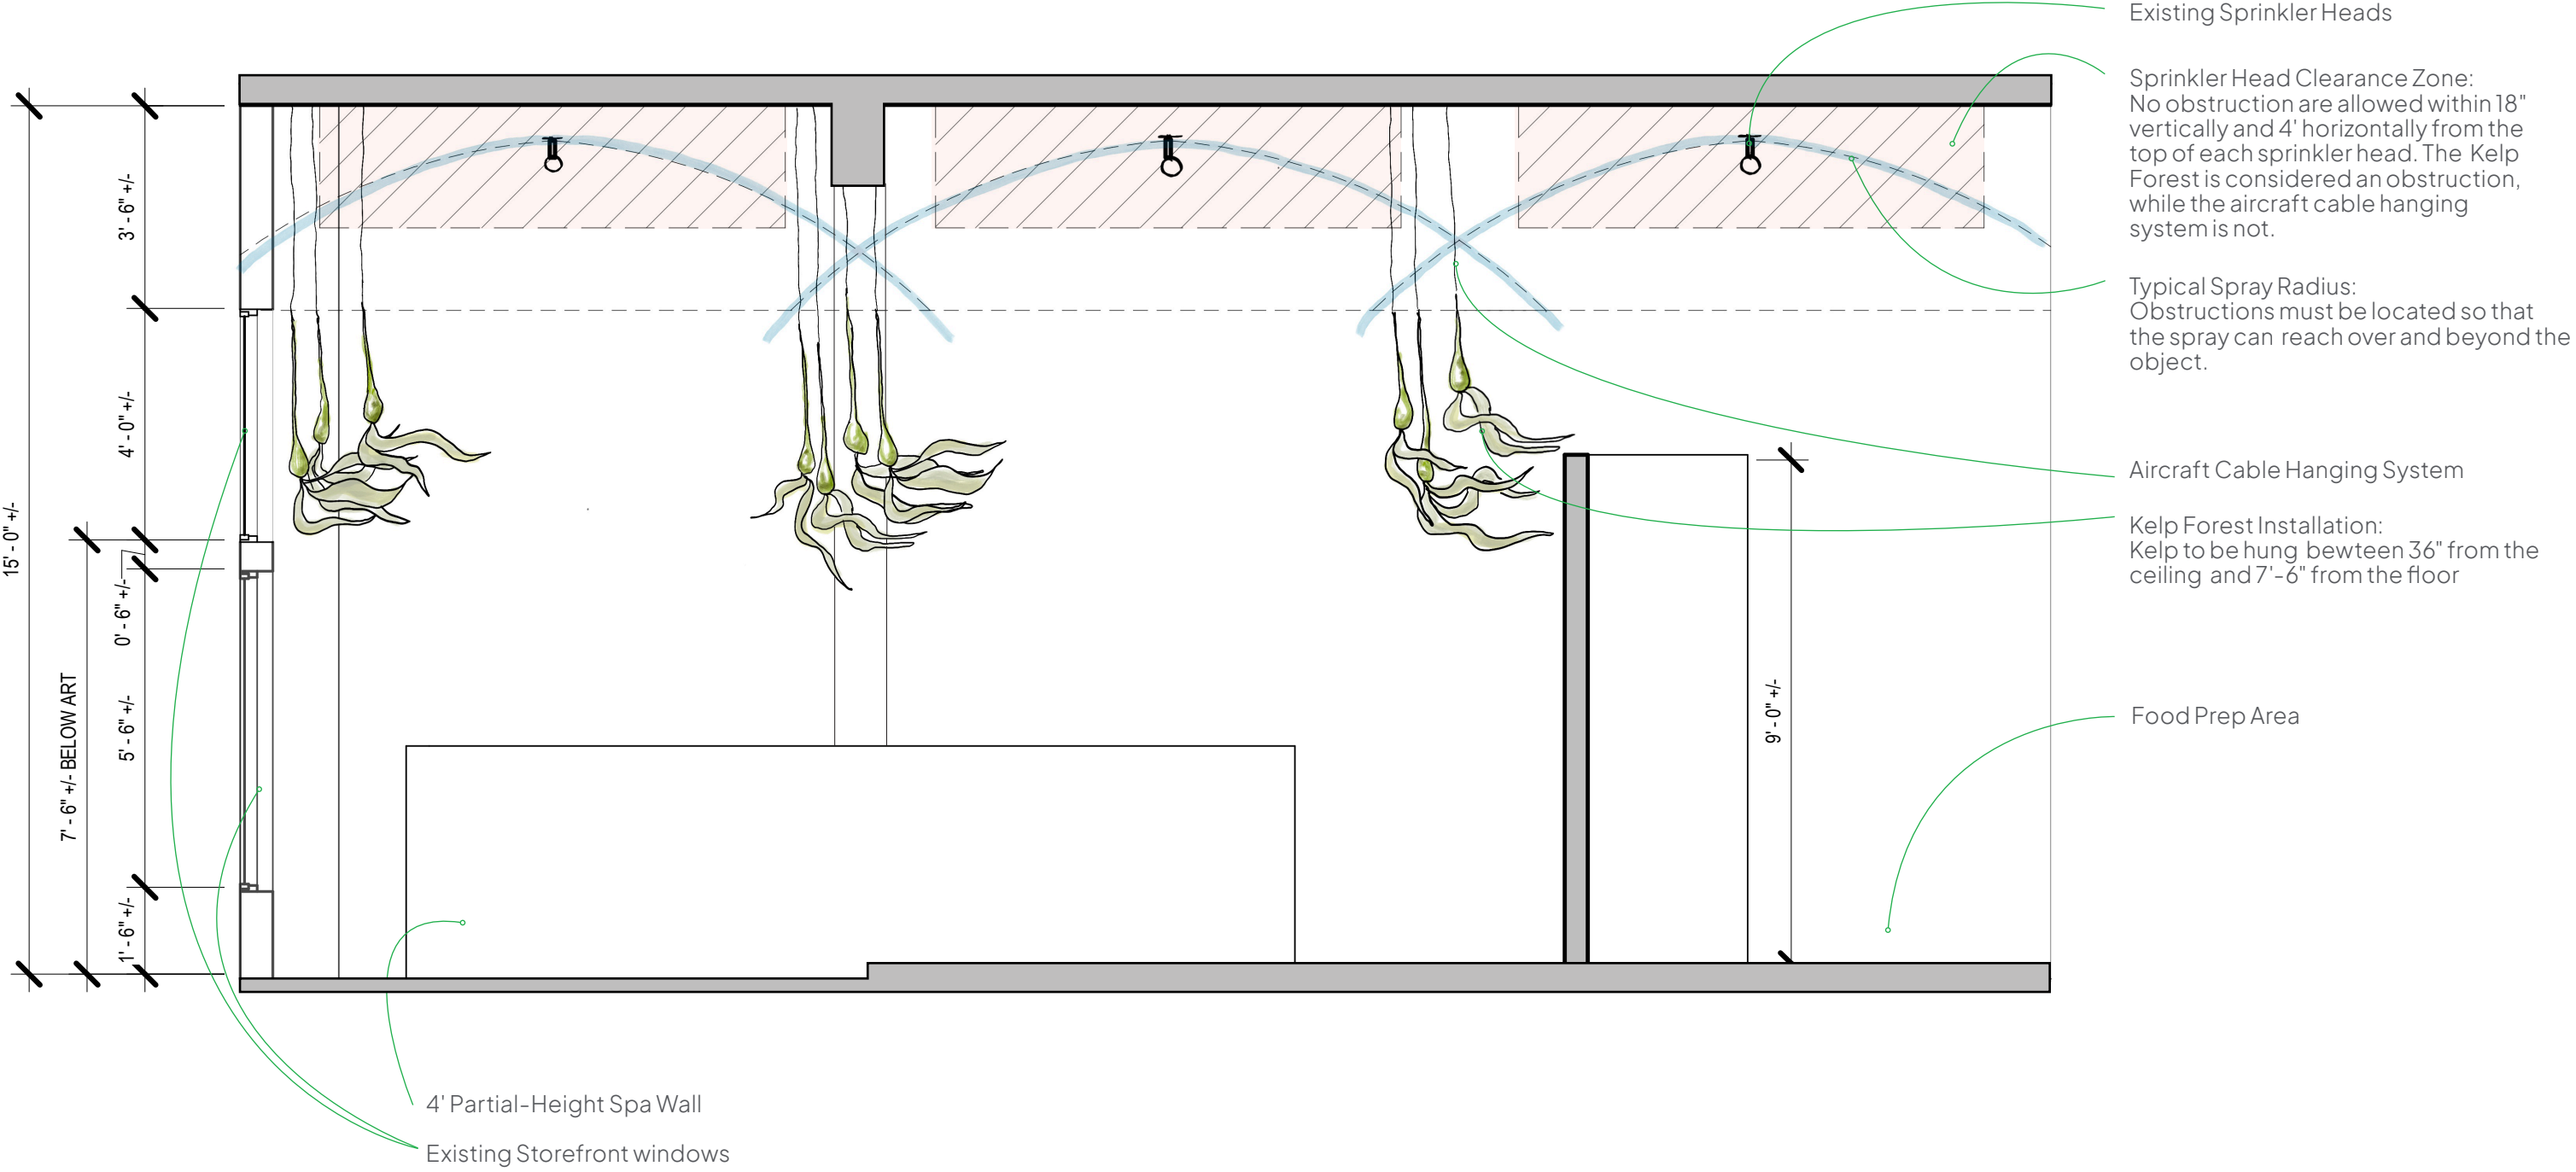

Design Proposal - Reflected Ceiling Plan

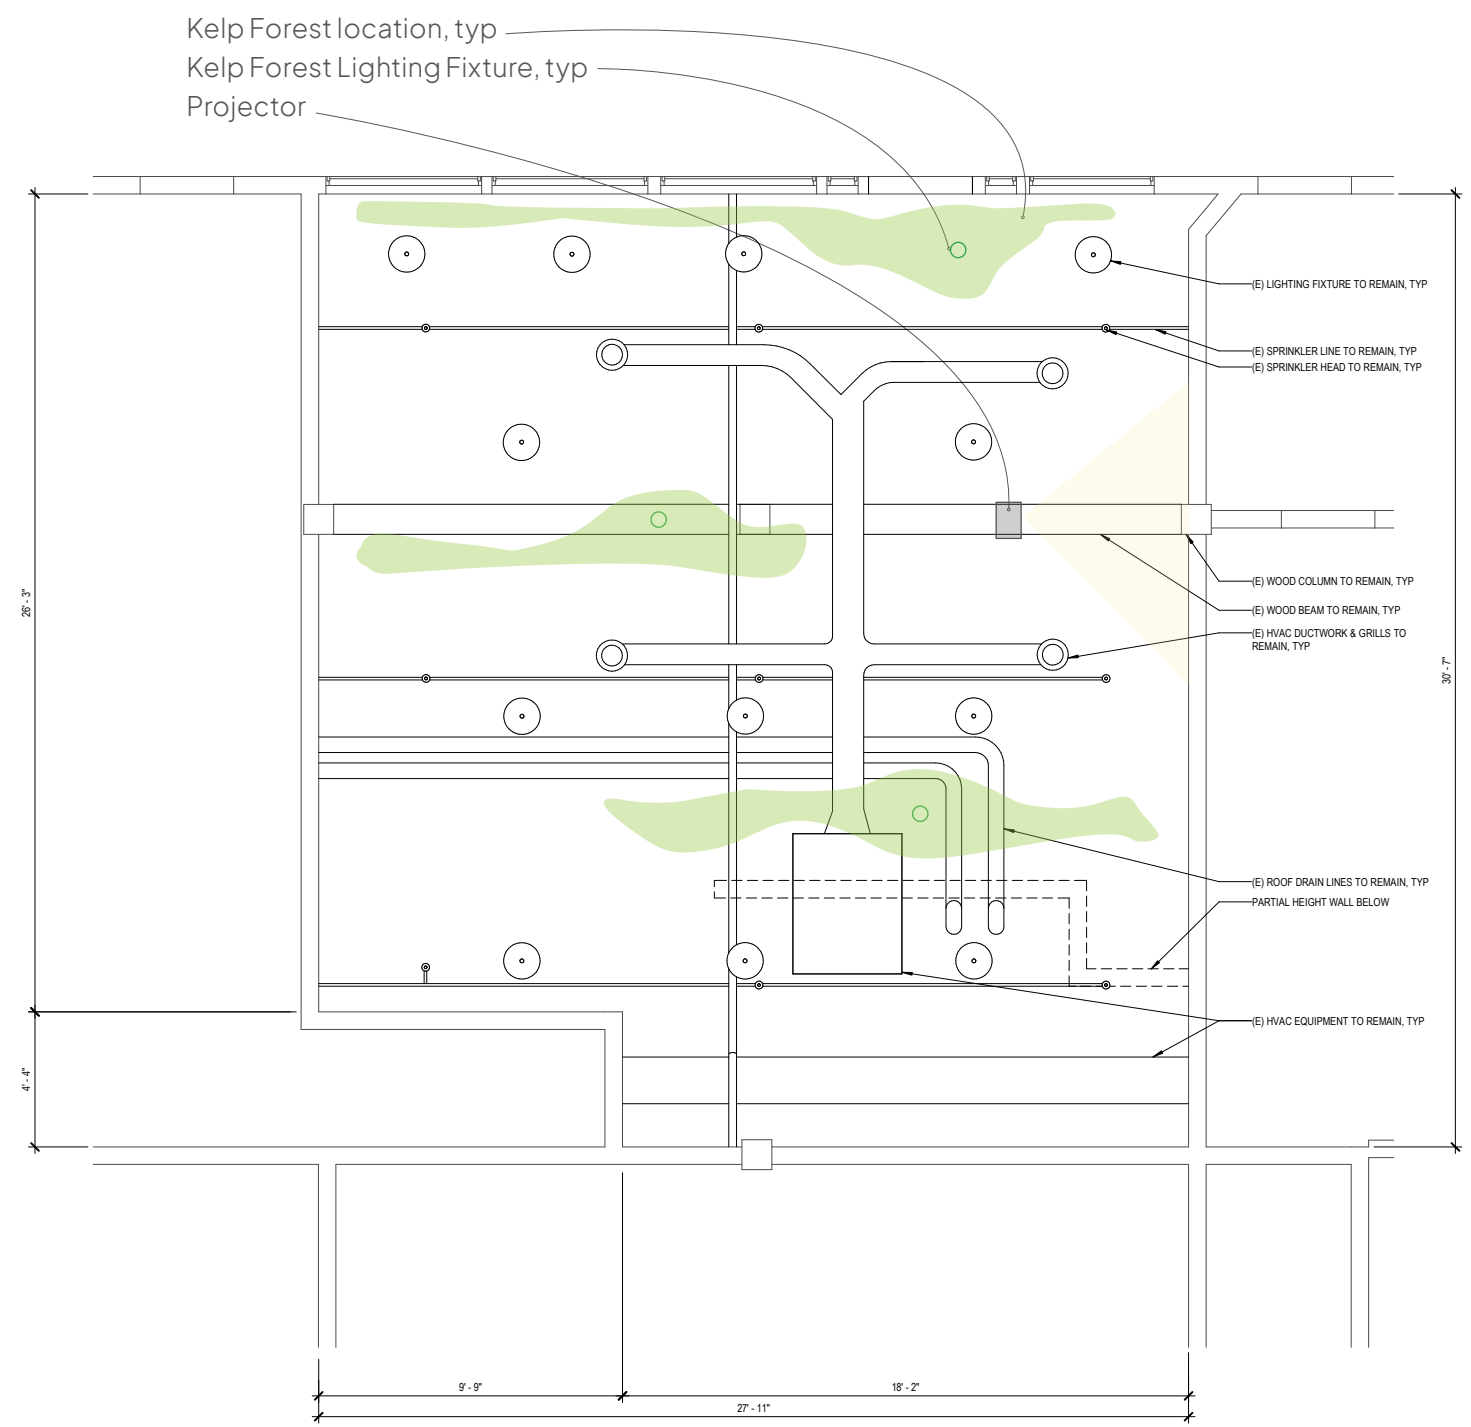

Lighting Scope

- Existing lighting fixtures to remain.
- No additional lighting fixtures in project.

Existing Lighting Fixtures

- Ceiling-mounted pendant
- 14" diameter
- Metal
- White
- 2700K



Existing lighting.

Kelp Forest Installation

- See Page 11 for details.

Projection

- See Page 11 for details.



Design Proposal - Finishes



Ceiling

- Area currently painted white to be painted blue: Benjamin Moore, Seacliff Heights (688). Includes wood ceiling, wood beams, painted piping (excluding sprinkler heads), and painted ducting.
- Unpainted ductwork to remain unpainted.




Crown Detail & Art Installation

- Existing wall paper to remain.
- Kelp Forest installation to be hung from ceiling (see page 10).




Walls

- Existing plaster and GWB walls to be patched and repaired in kind to match existing texture.
- All walls and columns to be repainted white: Benjamin Moore, Winter White (OC-21).

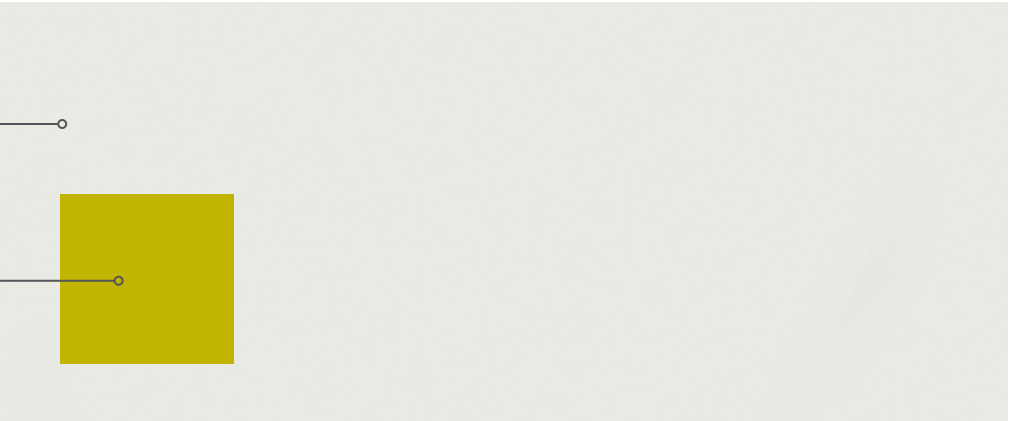



Accent Furniture

- Accent color, on limited painted wood furniture: Benjamin Moore, Chartreuse (2024-10).







Floor

- Existing wood flooring to remain per finish plan (see page 13), and to be refinished.
- Flooring in spa area to be impervious ceramic tile: Daltile, Harmonist 12"x12" square, Repose (charcoal grey). Grout color: charcoal grey.
- Flooring in food prep & bar/food prep areas to be impervious resilient flooring: Marmoleum, Walton, Cobalt Grey.
- Base to be rubber cove base throughout: Roppe, 700 Series, 4" height, 193 Black/Brown. see appendix for data sheet.

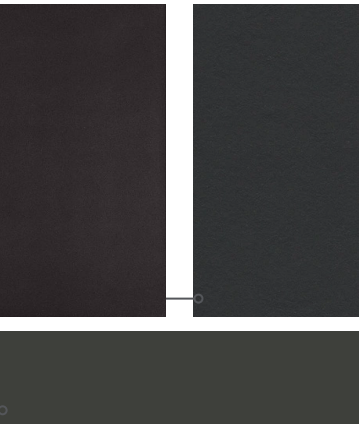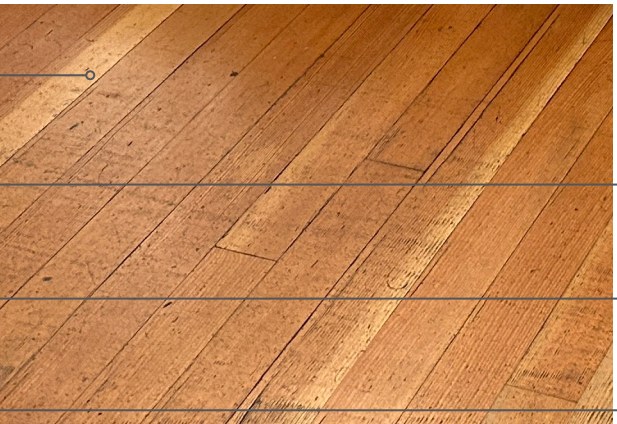

Design Proposal - Finish Plan

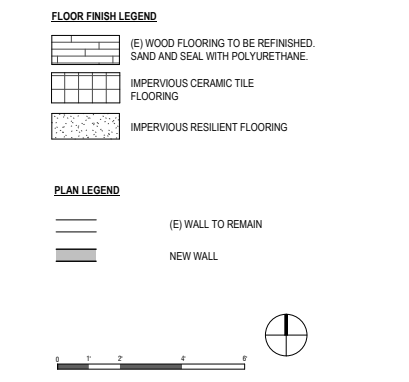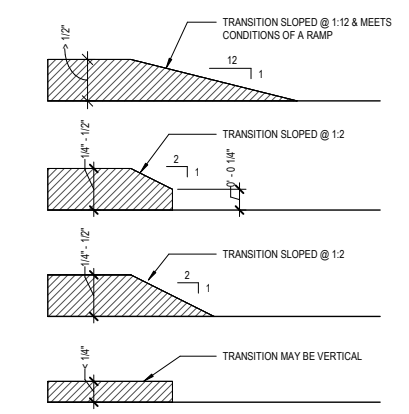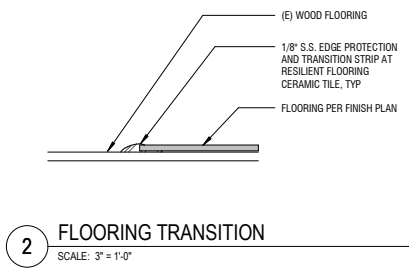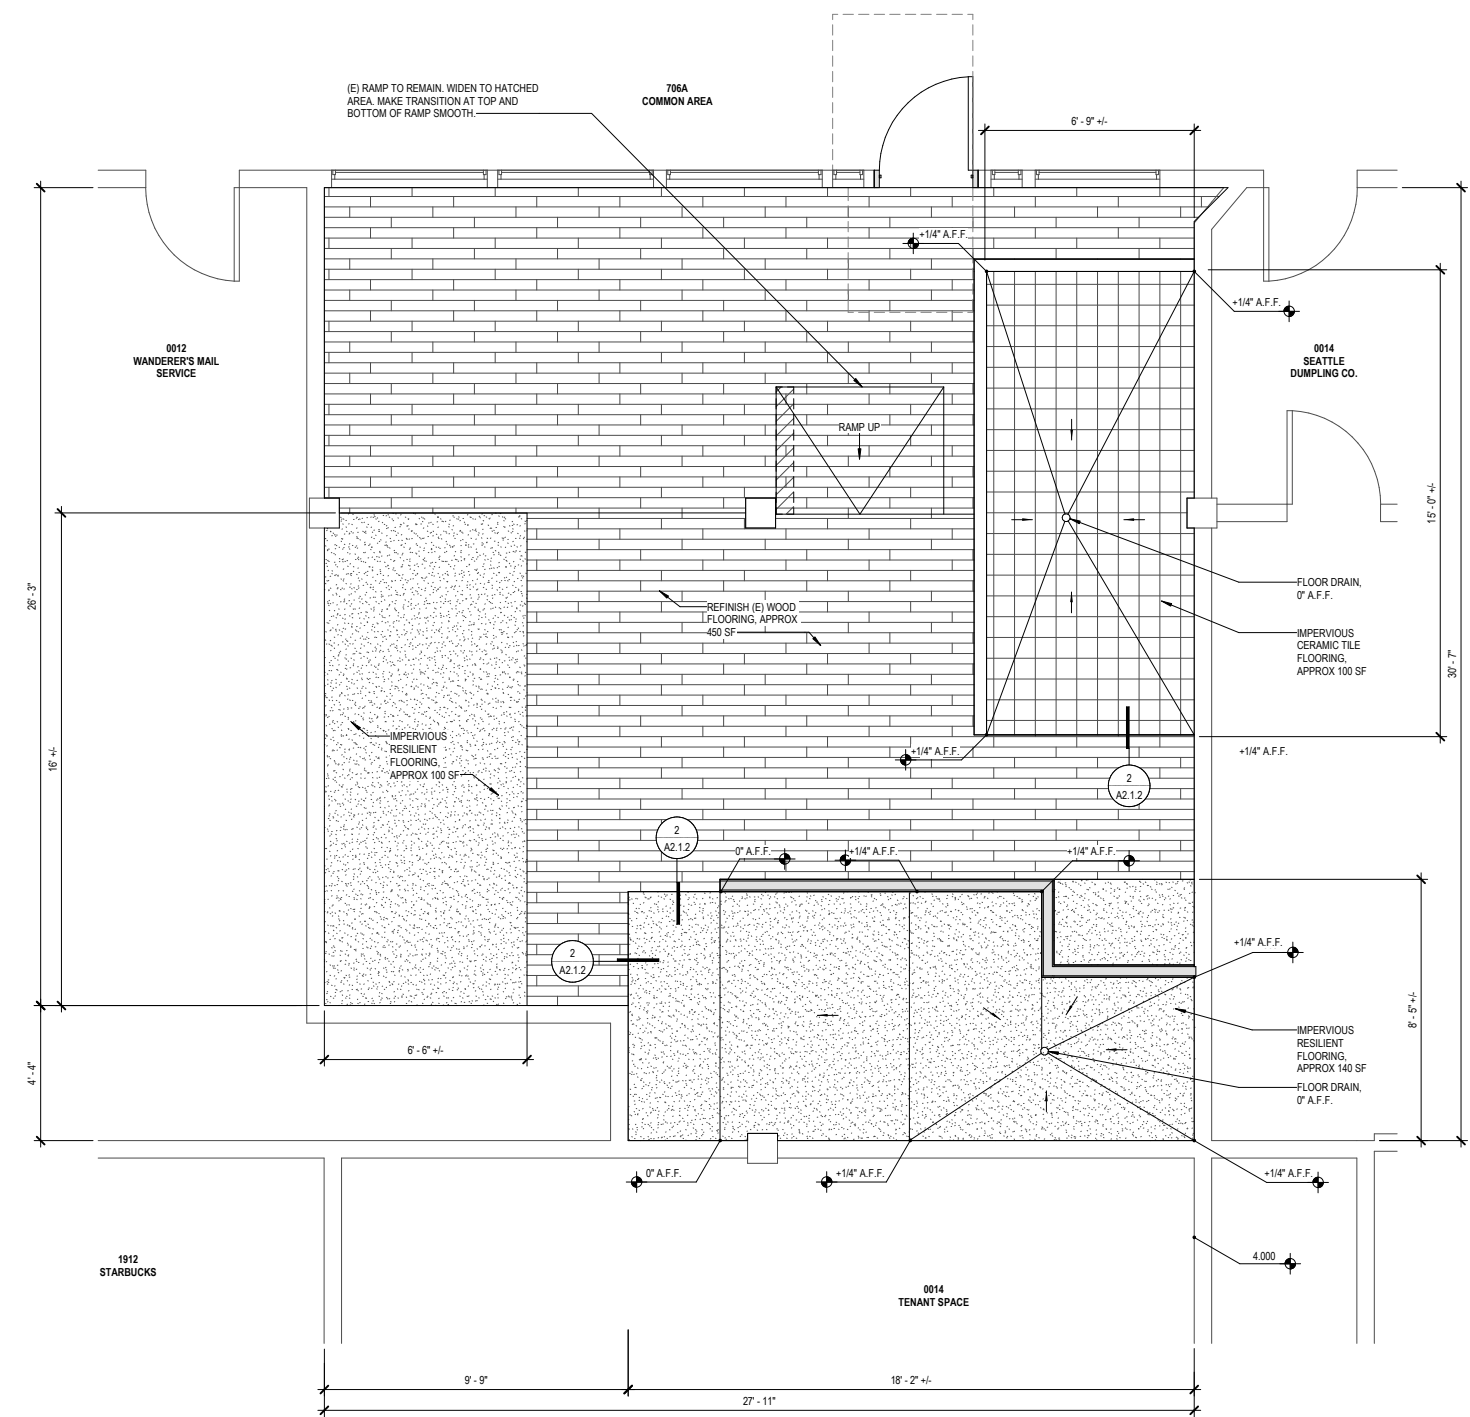

- ### Impervious Flooring
- **Resilient flooring** is highly durable and resistant to moisture because of its dense, nonporous construction. Its surface prevents liquids from penetrating and absorbing into the material, while its flexible composition helps resist cracking and allows it to accommodate minor movement in the subfloor.
 - **Ceramic tile** is also impervious to water due to its dense composition and protective glass-like glaze. Installation for this project will be in accordance with TCNA standards.
 - **Cove base** will be included at resilient and ceramic tile flooring locations to protect wall-to-floor joints from potential water infiltration

Design Proposal – Furnishings

Retail

- Wood wall-mounted display shelving.
- Wood display tables.
- Wood standing display shelving.
- Metal and glass standing display shelving.



Bar

- Wood bar and back-bar.
 - Cabinet boxes to be fir plywood.
 - Counters to be pre-finished hardwood, sealed with food safe sealant.
- Metal stools.



Spa

- Leather and wood lounge chairs.
- "Live edge" wood side tables.
- Foot baths, to be sanitized inbetween uses at dedicated spa sink.
 - Wood: 16" diameter x 10" deep.
 - 16" diameter x 7" deep.



Design Proposal - Signage

Exterior Sign

Existing → Hand-Painted Wood Sign




Exterior Signs

- To be mounted on both sides of existing sign board for Soames Dunn Building.
- Sign to match size of existing Soap Box signs: 14" width x 16" height.
- "Bounty" lettering: 3" height.
- Hand-painted sign on wood panel.
- Color: Blue.

Interior Sign

Existing → Phase 1: Hand-Painted Wood Sign → Phase 2: Neon Sign, to be applied for under future application

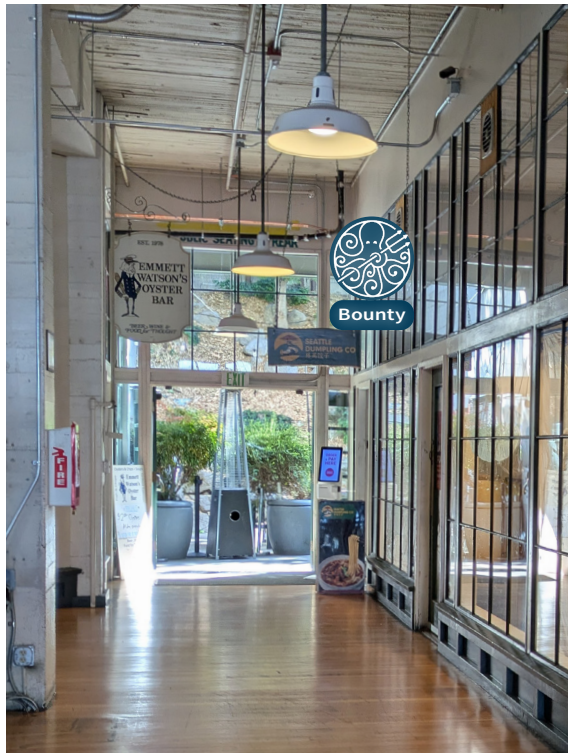

Interior Sign

- Both phases to match approximate size of Emmett Watson's Sign: 24" wide x 36" tall.
- Both phases to be mounted from existing ceiling chain.
- Phase 1:
 - Hand-painted sign on wood panel.
 - "Bounty" lettering: 4" height.
 - Color: blue.
- Phase 2, to be applied for under future application:
 - Neon.
 - Octopus to be 24" x 24".
 - "Bounty" lettering: 4" height.
 - Color: blue.



Appendix

- Projection Equipment
- Food Service Equipment



Projection Equipment

Projector
ONOAYO ONO5Pro 2.0
10"Lx7"Wx12"H



Projector Mount
PUTORSEN Adjustable Projector Ceiling Mount
Metal tray: 13.77" x 8.66", holds up to 22 lbs of weight
Height Adjustable: extends 14.17" - 21.65" from the ceiling


Weight Capacity
10KG (22LBS)



Food Service Equipment

Refrigerator and Freezer

To be purchased from the market.



Beverage-Air P-Series PF1HC-1AS 26 1/2"

[Leave a review](#) Item #: 185PF1HCAS MFR #: PF1HC-1AS



Lowboy

Residential Electric Water Heater

Features

- **Vitraglas® Lining with Microban®**—An exclusively engineered enamel formula that provides superior tank protection from the corrosive effects of water; and with Microban® antimicrobial product protection to help prevent the growth of bacteria, mold and mildew on the surface of the tank lining.
- **Hydrojet® Total Performance System**—Sediment reducing device that also increases first hour rating of hot water while minimizing temperature build-up in tank.

Additional Details

- **Blanketed & Non-Blanketed Models Available**—Non-blanketed models (RE120L6, RE230LN6, RE240LN6, RE250LN6) decrease installation time, perfect for new construction. Blanketed models (RE130L6, RE240L6, and RE250L6) offer install flexibility, ideal for replacements.
- **Fully Automatic Thermostat Controls**—Fast acting surface-mount thermostat with high limit energy cut-off (manual reset) for safety.
- **Direct Heat Transfer with Immersed Elements**—Screw-in style.
- **Insulation System**—Non-CFC foam covers the tank, reducing heat loss, energy consumption, and improves efficiency and jacket rigidity. Flexible fiberglass insulation on blanketed models.
- **Factory-Installed Heat Traps**—Incorporates a flexible disk that reduces heat loss in piping and prevents noise. (Except for RE120L6).
- **Non-Simultaneous Operation**—Simultaneous operation indicates when both elements (if equipped) are being heated at the same time.*
- **Voltages Available**—120V, 208V, 240V, 277V, 480V.
- **Single Phase or Three Phase Operation Available**—120V & 277V may only be wired for single phase operation.
- **Water Connections**—NPT factory-installed dielectric waterway with heat traps.
- **Protective Anode Rod**—Provides added protection against corrosion for long-term, trouble-free service.
- **T&P Relief Valve**—Installed, side T&P is standard. Optional top T&P location is available.
- **Low Restrictive Brass Drain Valve**—Durable tamper proof design.
- **Housing and Urban Development**—These water heaters are designed in accordance with H.U.D. and are approved for installation in a manufactured home (mobile home).



Photo is of RE240LN6



*Simultaneous operation must be specified when ordering.

6 or 10-Year Limited Tank Warranties / 6-Year Limited Warranty on Component Parts.

For more information on warranty, please visit www.bradfordwhite.com

For products installed in USA, Canada, and Puerto Rico. See complete copy of the warranty included with the heater for limitations.

Microban® antimicrobial product protection helps prevent the growth of bacteria, mold and mildew that may affect the product. The built-in antimicrobial properties do not protect users or others from disease-causing organisms. Microban® is a registered trademark of Microban Products Company.



Lowboy

Residential Electric Water Heater

SPECIFICATIONS

Lowboy

C.E.C. Listed

Model Number	Rated Nominal Capacity		DOE Rated Storage Volume Gal.	First Hour Rating Gal.	Uniform Energy Factor	Element Wattage (Watts)		A Floor to Top of Heater	B Jacket Dia.	C Floor to Water Conn.	D C/L of Water Conn.	E Floor to T&P Conn.	G Water Conn. NPT	Approx. Shipping Weight
	U.S. Gal.	Imp. Gal.				Minimum	Maximum	in.	in.	in.	in.	in.	in.	lbs.
RE120L6†	19	16	—	—	—	1500	6000	24 7/16	18	25 11/16	8	18 15/16 / 25 11/16	3/4	65
RE130L6**	28	23	26	42	0.92	1500	6000	29 9/16	20	31 5/16	8	23 1/16 / 31 5/16	3/4	99
RE230LN6	28	23	26	41	0.92	1500	6000	29 9/16	23	31 5/16	8	23 1/16 / 31 5/16	3/4	102
RE240LN6	37	31	34	45	0.92	1500	6000	32 1/16	24 1/2	34 5/16	8	23 3/16 / 34 5/16	3/4	126
RE240L6**	38	32	35	49	0.91	1500	6000	32 3/8	24	34 5/8	8	23 3/16 / 34 5/8	3/4	140
RE250LN6	47	39	43	61	0.92	4000	6000	33 5/16	26	36 1/16	8	24 5/16 / 36 1/16	3/4	173
RE250L6**	47	39	43	61	0.94	4000	6000	33 5/16	26	36 1/16	8	24 5/16 / 36 1/16	3/4	175

Model Number	Rated Nominal Capacity		DOE Rated Storage Volume Liters	First Hour Rating Liters	Uniform Energy Factor	Element Wattage (Watts)		A Floor to Top of Heater	B Jacket Dia.	C Floor to Water Conn.	D C/L of Water Conn.	E Floor to T&P Conn.	G Water Conn. NPT	Approx. Shipping Weight
	Liters	Liters				Minimum	Maximum	mm.	mm.	mm.	mm.	mm.	mm.	kg.
RE120L6†	72	—	—	—	—	1500	6000	621	457	652	203	481 / 652	19	29
RE130L6**	106	—	98	159	0.92	1500	6000	751	508	795	203	586 / 795	19	45
RE230LN6	106	—	98	155	0.92	1500	6000	751	584	795	203	586 / 795	19	46
RE240LN6	140	—	129	171	0.92	1500	6000	814	622	872	203	598 / 872	19	57
RE240L6**	144	—	132	186	0.91	1500	6000	822	610	879	203	598 / 879	19	64
RE250LN6	178	—	163	231	0.92	4000	6000	846	660	916	203	618 / 916	19	78
RE250L6**	178	—	163	231	0.94	4000	6000	846	660	916	203	618 / 916	19	79

** Models include supplied insulation blanket (2" thick). Dimensions in charts above do not include blanket thickness.

For 10 year models, change suffix "6" to "10".

All models available with optional top T&P location (Plugged).

† Exempt from ASHRAE 90.1b (current standard).

Uniform Energy Factor and First Hour Rating is based on the latest AHRI directory listings.


Refer to Element Wattage Minimum & Maximum in chart above

Wattage Limitations for Simultaneous Operation	Voltage					Wattage Limitations for Non-Simultaneous Operation	Voltage				
	120V	208V	240V	277V	480V		120V	208V	240V	277V	480V
1500W / 1500W	yes	yes	yes	yes	yes	1500W / 1500W	yes	yes	yes	yes	yes
2000W / 2000W	no	yes	yes	yes	yes	2000W / 2000W	yes	yes	yes	yes	yes
2500W / 2500W	no	yes	yes	yes	yes	2500W / 2500W	yes	yes	yes	yes	yes
3000W / 3000W	no	yes	yes	yes	yes	3000W / 3000W	yes	yes	yes	yes	yes
3500W / 3500W	no	yes	yes	no	no	3500W / 3500W	no	yes	yes	no	no
4000W / 4000W	no	•yes	yes	yes	yes	4000W / 4000W	no	•yes	yes	yes	yes
4500W / 4500W	no	yes	yes	•yes	•yes	4500W / 4500W	no	yes	yes	•yes	•yes
5000W / 5000W	no	•yes	yes	•yes	•yes	5000W / 5000W	no	•yes	yes	•yes	•yes
5500W / 5500W	no	yes	•yes	no	no	5500W / 5500W	no	•yes	•yes	no	no
6000W / 6000W	no	no	yes	•yes	•yes	6000W / 6000W	no	•yes	yes	•yes	•yes

• = Not available on RE130L and RE230LN6.

Wattage	Recovery ▲ GPH Temperature Rise °F					
	60	80	90	100	120	
1500W	10	8	7	6	5	
2000W	14	10	9	8	7	
2500W	17	13	11	10	9	
3000W	21	15	14	12	10	
3500W	24	18	16	14	12	
4000W	28	21	18	16	14	
4500W	31	23	21	19	15	
5000W	34	26	23	21	17	
5500W	38	29	25	23	19	
6000W	41	31	28	25	21	

▲(GPH based on Non-Simultaneous operation, when Simultaneous operation the GPH will approximately double.)

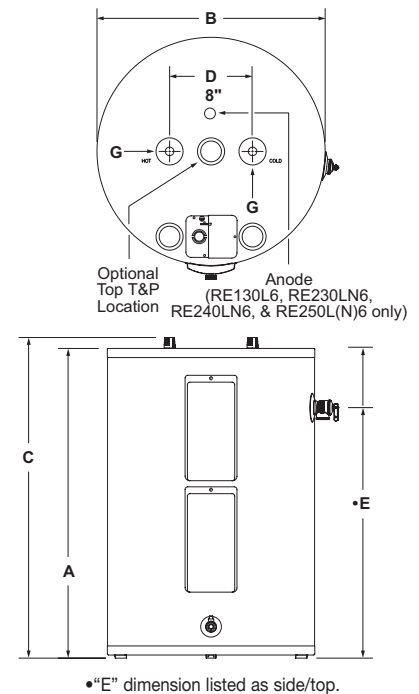

GENERAL:

Meets NAECA Requirements. All models UL® listed. These heaters are wired inter-locking (Non-Simultaneous, Single Phase) 240V with two 4500W elements, unless otherwise specified. All water connections are 3/4" (19mm) NPT. All models certified at 300 PSI test pressure (2068 kPa) and 150 PSI working pressure (1034 kPa.)

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.



Sales: 800-523-2931

24/7 Technical Support: 800-334-3393 • Email: TechServ@bradfordwhite.com

Products made by Bradford White are manufactured in America using the finest materials and components from around the world. ©2026, Bradford White Corporation, USA. All rights reserved.

— BRADFORD WHITE IS —



1203-0526



Retail Refrigerator

BEVERAGE-AIR®

Project: _____	AIA# _____
Item: _____	
Location: _____	SIS# _____
Approved: _____	

MARKETEER™ MERCHANDISERS

MT10 Black Hinged Door Model

Hydrocarbon Series

MODEL:
MT10-1B



**3 Year Parts/Labor Warranty
5 Year Compressor Warranty**

CABINET CONSTRUCTION

- Standard cabinet exterior finish is heavy duty steel with a black baked on durable coating
- Heavy duty interior construction includes white coated steel
- Mechanical temperature control
- Modern one piece grille
- Double pane lowE argon filled glass door feature outside pane that is tempered for added safety
- Door lock standard
- Self-closing hinged glass door features, pocket door handle
- LED lighting
- Three (3) epoxy coated shelves
- Leveling feet

OPTIONS & ACCESSORIES

- Extra shelves and clips
- Visislide shelving kit

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Condenser is designed to be low maintenance, and energy efficient
- Automatic, non-electric defrost
- Epoxy coated evaporator coil

MT10™ MERCHANDISER: HINGED DOOR MODEL



Please verify qualifying units by visiting:
www.energystar.gov/cfs

3779 Champion Blvd., Winston-Salem, NC 27105
1-888-845-9800 Fax: 1-336-245-6453
Beverage-Air.com Sales@bevair.com



BEVERAGE-AIR®


MODEL	MT10-1B
EXTERNAL DIMENSIONAL DATA	
Width Overall	24 7/8"
Depth Overall	22 13/16"
Height Overall	54 3/8"
Number of Doors	1
Depth with Door Open 90°	46"
Door Opening	21" x 39 7/16"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	9.43
Capacity 20 oz	126
Internal Width Overall (in)	22"
Internal Depth Overall (in)	16 1/4"
Internal Height Overall (in)	40 5/8"
Internal Height Useable (in)	37 3/16"
Number of Shelves	3
ELECTRICAL DATA	
Full Load Amperes	3.2
Voltage	115/60/1
Nema Plug (8' cord)	5-15P
REFRIGERATION DATA	
Horsepower	1/6
Energy Consumption	1.740 kWh/day
Charge (lbs/grams/ounces)	0.104 / 47 / 1.66
WEIGHT DATA	
Gross Weight - Crated	198 lbs
Height - Crated	65"
Width - Crated	28"
Depth - Crated	27"

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).


Glass Hinged Door Model Model: MT10-1B

Model Views


Required Clearance: 4" Top, Bottom, Rear, & Sides



PLAN VIEW

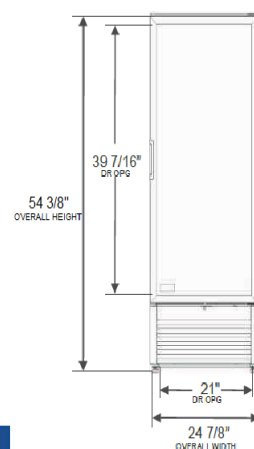

ELEVATION VIEW

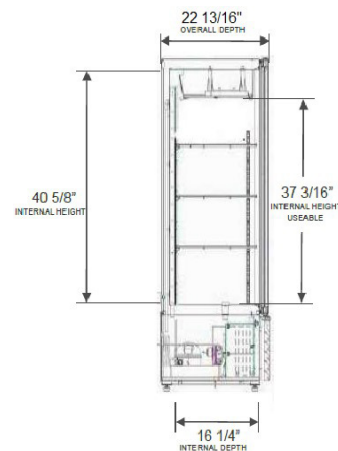

SIDE VIEW

ELECTRICAL CONNECTION



115/60/1
NEMA 5-15P

Unit pre-wired at factory and include 8' long cord and plug set.



3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com





Under-counter Refrigerator - Bar

BEVERAGE-AIR®

Project: _____	AIA# _____
Item: _____	
Location: _____	SIS# _____
Approved: _____	

BB24HC BACK BAR REFRIGERATOR

BAR EQUIPMENT- BACK BAR REFRIGERATOR

MODEL:
BB24HC-1-S

**BB24HC Solid Door
Hydrocarbon Series**



**7 Year Parts/Labor Warranty
7 Year Compressor Warranty**

CABINET CONSTRUCTION

- Exterior is stainless steel front with continuous coil coated sides
- Interior construction utilizes galvanized steel on walls and ceiling, heavy duty stainless steel floor
- Mechanical control
- 1 ½" Stainless steel top
- Two (2) epoxy coated wire shelves
- Self-closing door with 120° stay-open feature
- Door lock
- Field reversible door (hinge kit not included)
- LED lighting
- Magnetic gaskets provide positive door seal
- Packaged products only
- 4" Heavy duty casters two (2) with locks
- Balanced, forced air refrigeration system provides rapid chilling of product

OPTIONS & ACCESSORIES

- For stainless steel interior (refer to -F models)
- Wine model (40°-60° models)
- Underbar model option
- Galvanized sub-top

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Maintains product temperature between 36°F and 38°F



Please verify qualifying units by visiting:
www.energystar.gov/cfs

3779 Champion Blvd., Winston-Salem, NC 27105
1-888-845-9800 Fax: 1-336-245-6453
Beverage-Air.com Sales@bevair.com



BEVERAGE-AIR


MODEL	BB24HC-1-S
EXTERNAL DIMENSIONAL DATA	
Width Overall	24"
Depth Overall	30 1/8"
Height Overall with Casters	37 3/4"
Number of Doors	1
Depth with Door Open 90°	50 3/4"
Door Opening (in)	19 3/4" x 28"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	7.66
Internal Width Overall (in)	20"
Internal Depth Overall (in)	22 1/4"
Internal Height Overall (in)	29 1/2"
Number of Shelves	2
Number of 1/2 Kegs	1
ELECTRICAL DATA	
Full Load Amperes	2.0
REFRIGERATION DATA	
Horsepower	1/6
Capacity (BTU/Hr)	1094
Heat Rejection (BTU/Hr)	1641
Charge (lbs/grams/ounces)	0.1213 / 55 / 1.94
SHIPPING DATA	
Gross Weight - Crated	188 lbs
Height - Crated	46"
Width - Crated	27"
Depth - Crated	32"

*NOTE: Remote units are field wired and come with 6" legs.
Refrigerant must be specified at time of order.


We reserve the right to change specifications and product design without notice.
Such revisions do not entitle the buyer to corresponding changes, improvements,
additions or replacements for previously purchased equipment. Dimensional
tolerances +/- 1/4". Metric dimensions (MM).

Bar Equipment-Back Bar Refrigerator Model: BB24HC-1-S


Model Views



PLAN VIEW



ELEVATION VIEW

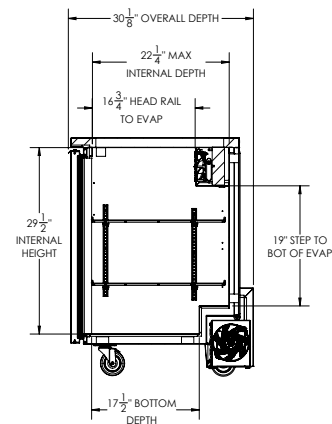

SIDE VIEW



ELECTRICAL CONNECTION

115/60/1
NEMA 5-15P

Unit pre-wired at factory
and include 8' long cord
and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com





Quote

02/25/2026

Project:
Bounty

From:
Dick's Restaurant Supply
Dia Fullerton
2963 1st Ave South
Seattle, WA 98134
206-382-0160
206-382-0160 (Contact)

Job Reference Number: 34140

Thanks for allowing us the opportunity to quote on your project.

Item	Qty	Description	Sell	Sell Total
1	1 ea	DISHWASHER, UNDERCOUNTER  CMA Dishmachines Model No. UC65E Dishwasher, undercounter, 24"W x 25"D x 33-1/2"H, high temperature sanitizing, built-in 4.0 kW booster heater, (30) racks/hour, 14-1/2" door opening, 2.0 kW tank heater, built-in detergent & rinse chemical pumps, pumped drain, upper & lower stainless steel rotating wash & rinse arms, triple filtering protection system, stainless steel construction, includes (1) open & (1) peg rack, 1 HP wash pump, NSF, cETLus, ENERGY STAR®	\$6,209.00	\$6,209.00
	1 ea	208v/60/1-ph, 24.0 amps, with 4.0 kW booster heater		
	1 ea	Safe-T-Temp feature assures 180 degree sanitizing rinse once the booster thermostat has been satisfied. Cycle time will vary due to incoming water temperature.		
	1 ea	Drain Water Tempering Kit – fits UC 65/H-1X (factory installed only)	\$363.00	\$363.00
	1 ea	Universal Dishmachine Pedestal, stores 2 empty dishracks, with adjustable leveling legs, 24"W x 25-3/8"D x 15-1/4"H, mounts to undercounter models L-1X, L-1X16, 180-UC/181-GW, & UC65e	\$455.00	<Optional>
ITEM TOTAL:				\$6,572.00
2	1 ea	HAND SINK  Krowne Model No. HS-26L Hand Sink, wall mount, 15-3/4"W x 15-1/4"D x 13-3/8"H OA, 7-3/4"H backsplash, 12-1/2" wide x 9-3/4" front-to-back x 5-5/8" deep bowl, 4" OC splash mount faucet, 4-1/2" double bend faucet (low lead compliant), 7-3/4"H side splashes on left & right, includes mounting bracket, stainless steel construction, NSF	\$297.00	\$297.00
	1 ea	H-111 Towel & Soap Dispenser, 16"W, for wall mount hand sinks, NSF	\$189.00	<Optional>
ITEM TOTAL:				\$297.00

Food-prep area.
See spec sheets for
additional sinks.

Item	Qty	Description	Sell	Sell Total
3	1 ea	ICE MAKER WITH BIN, CUBE-STYLE Manitowoc Model No. UYP0190A NEO® Undercounter Ice Maker, R290 Refrigerant, half-dice size ice, air-cooled, self-contained with integrated 5 micron on-board water filter. 26"W x 28.5"W x 38.5"H, production capacity up to 200 lbs/24 hours at 70°/50° (180 lbs. AHRI certified at 90°/70°), 90 lbs. storage capacity, touchpad controls, production delay (8 & 16 hour), clean button, filter replacement, full bin, and service indicators, forward sliding storage bin for access to refrigeration components, 6"adjustable stainless steel legs.	\$3,146.00	\$3,146.00
				
	1 ea	WARRANTY-ICE-SC 3 year parts & labor (Machine), 5 year parts & labor (Evaporator), 5 year parts & 3 years labor (Compressor), standard [Refer to Ice Machine Warranty Bond for complete details]		
	1 ea	(-161B) 115v/60/1-ph, 6.0 amps, cord with NEMA 5-15P		
	1 ea	K00530 5 micron NEO replacement cartridge	\$74.00	<Optional>
ITEM TOTAL:				\$3,146.00
4	2 ea	PANINI GRILL Waring Model No. WPG250T Panini Supremo™ Large Panini Grill, electric, single, 14-1/2" x 11" cooking surface, with timer, hinged auto-balancing top plate with heat resistant handles, ribbed cast iron plates, adjustable thermostat 570°F (300°C), indicator lights, brushed stainless steel body & removable drip tray, 1.8kW, 120v/60/1-ph, 15 amps, NEMA 5-15P, UL, NSF	\$475.00	\$950.00
				
	2 ea	1 year limited warranty, standard		
		For Customer Care & Product Service, please contact: (800) 269-6640 waring_service@conair.com		
		Waring Customer Care 314 Ella T. Grasso Ave Torrington, CT 06790		
ITEM TOTAL:				\$950.00
5	1 ea	POP-UP TOASTER Waring Model No. WCT708 Commercial Toaster, medium-duty, (4) extra wide 1-3/8" slots, (4) slice capacity (up to 225 slices/hr), (2) rotary dial to adjust browning controls, removable crumb tray, brushed chrome finish, 3-prong plug, 120v/60/1-ph, 15 amps, 1800 watts, cETLus, NSF	\$324.00	\$324.00
				
	1 ea	1 year limited warranty, standard		
		For Customer Care & Product Service, please contact:		

Item	Qty	Description	Sell	Sell Total
		(800) 269-6640 waring_service@conair.com Waring Customer Care 314 Ella T. Grasso Ave Torrington, CT 06790		
			ITEM TOTAL:	\$324.00
6	1 ea	THREE (3) COMPARTMENT SINK Advance Tabco Model No. FE-3-1014-15RL-X Special Value Fabricated Sink, 3-compartment, 15" right & left drainboards, bowl size 10" x 14" x 10" deep, 18 gauge 304 stainless steel, tile edge splash, rolled edge, 8" OC faucet holes, galvanized legs with 1" adjustable plastic bullet feet, overall 19-3/4" F/B x 60" L/R, NSF (Special Value NET Pricing)	\$854.00	\$854.00
			ITEM TOTAL:	\$854.00
8	1 ea	INDUCTION SOUP KETTLE CookTek (Middleby) Model No. 676101 (QUICK SHIP) (SAS081-11) SinAqua™ Souper Induction Kettle, 11 quart, adjustable temperature (holding from 140°-200°F / rethermalizing from 170°-200°F), programmable stir notification, touch pad controls with digital temperature display, includes: (1) 11 qt. 18/8 stainless steel soup tureen & lid, spun aluminum exterior construction (finish to be specified) and high-gloss polycarbonate fascia & tureen liner, 100-120/50/60/1-ph, 7.0 amps, 0.8kW, cord, NEMA 5-15P, cETLus, NSF, CE 1 ea Two year limited parts and labor warranty in US/Canada only and 3 year enrollment in the CookTek Advanced Replacement Program (ARP) 1 ea (676101) Brushed aluminum finish 1 ea 302408 Soup Tureen, induction, 11 quart capacity, with lid, stainless steel 1 ea 302393 (302393) Ring, for 11 qt., stainless steel ***USED DEMO NO WARRANTY***	\$350.00	\$350.00
			ITEM TOTAL:	\$350.00
9	1 ea	SANDWICH / SALAD PREPARATION REFRIGERATOR	\$4,250.00	\$4,250.00

Item	Qty	Description	Sell	Sell Total
		True Mfg. - General Foodservice Model No. TSSU-36-08-HC Sandwich/Salad Unit, (8) 1/6 size (4"D) poly pans, stainless steel insulated cover, 11-3/4"D cutting board, (2) full doors, (4) PVC coated adjustable wire shelves, stainless steel top, front, sides, GalFan coated steel back, aluminum interior with stainless steel floor, view spec sheet for electrical information & certifications, Made in USA		
	1 ea	7 year compressor warranty, 7 years parts warranty, 7 year labor warranty, standard. Visit www.truemfg.com for specifics.		
	1 ea	Self-contained refrigeration standard		
	1 ea	Castors, 5" (36" work surface height) standard		
		ITEM TOTAL:		\$4,250.00
10	1 ea	RICE / GRAIN COOKER Panasonic Model No. SR-GA421FH Commercial Rice Cooker, electric, (46) cups cooked rice capacity, serves approximately (94) 3 oz. portion servings, keep warm feature (5 hours), push button start, automatic shut-off, built-in double thermal fuse, non-stick coated pan, includes measuring cup, white exterior, 120v/60/1-ph, 13.0 amps, 1550 watts, cord with NEMA 5-15P, ETLus, NSF	\$175.00	\$175.00
	1 ea	1 year parts & labor warranty ***THIS ONE ONLY***LAST ONE ON OUR FLOOR AT THIS PRICE***		
		ITEM TOTAL:		\$175.00
11	2 ea	INDUCTION RANGE, COUNTERTOP Vollrath Model No. 59500P Mirage Pro Countertop Induction Ranges, Induction ranges, countertop, 14.0"W x 15.25"D x 3.0"H, Stainless Steel, 120 voltage, 1800 watts, 15 amps, NEMA 5-15P plug, FCC, UL, NSF, CUL, 2 Year Warranty	\$995.00	\$1,990.00
	2 ea	2 year parts & labor warranty		
		ITEM TOTAL:		\$1,990.00
12	1 ea	COMMERCIAL FOOD BLENDER Vitamix Model No. 062826 Vita-Prep 3 (VM0101D), 64 oz. (2 liters) capacity, clear BPA Free Tritan™ standard container with wet blade assembly, manually-operated variable speed control, start/stop switch automatically returns to neutral position, includes: lid & tamper, black base with red face, 3 peak HP, 120v/50/60/1-ph, 13.0 amps, NEMA 5-15P, cULus, NSF	\$659.00	\$659.00
	1 ea	3 years warranty on motor base parts & 1 year warranty on labor, standard		
		ITEM TOTAL:		\$659.00
13	1 ea	MISC KITCHEN EQUIPMENT PLUS GLASSWARE/PLATES/SILVERWARE	\$2,000.00	\$2,000.00

Item	Qty	Description	Sell	Sell Total
Custom Model No. MISC.				
			ITEM TOTAL:	\$2,000.00
			Merchandise	\$21,567.00
			Tax 10.55%	\$2,275.32
			Total	\$23,842.32

Quotes are valid for 30 days from date of issue.

Unless noted, the following are not included: shop drawings, permits, hood hanging materials, seismic restraints, engineering, faucets, drains, millwork, roof curbs, fire-rated duct shafts, fire suppression, plumbing, electrical, gas, refrigeration, walk-in assembly, mag starters, switches, air balancing, bulbs, wall backing, dumpster, final connections, or general construction.

Special order cancellations/returns may incur restock fees or be non-returnable. Any supplier-imposed government tariffs will be passed through and added to your invoice.

[Click Here to Make a Payment](#)

Acceptance: _____ Date: _____

Printed Name: _____

Standard Hand Sinks

Hand Sinks

HS-2L
16" Wide
Hand Sink

HS-2L-RS/LS
Side Splash
on One Side
HS-2-LS
shown

HS-2-LF
4" Centers,
Faucet not
included

HS-4
Overflow & P-Trap

HS-10
Side
Support
Brackets

HS-20-LF
8" Centers,
Faucet not
included

HS-18
Deck Mount
Faucet

HS-34
Hands Free
with
Push Back
Activation

HS-22
Heavy Duty
Faucet

HS-43
Wrist Blade
Faucet

HS-36
Eyewash
Station


Specifications

Fabrication	20 gauge stainless steel
Bowl	Deep drawn bowl with stamped rim to prevent spillage
Wall Mount Bracket	Offset design for added strength
Faucet	4" center wall mount included on most models
Drain	1-1/2" Stainless steel drain
Drain with Overflow	Stainless steel with plastic overflow tube and inlet (supplied with those sinks that contain an overflow hole)
Plumbing	1/2" IPS hot and cold water 1-1/2" IPS drain outlet (HS-20-LF has 3-1/2" drain) - Install at 36" working height 1/2" faucet supply 12" from floor 1-1/2" drain line 23-1/4" from floor
Certifications	- NSF/ANSI 372 - ASME A112.8.1-2012/CSA B125.1-12 - ASME A112.19.3/CSA B45.4 - NSF 2

Optional Accessories

Model	Description
21-311L	Wrist Blade Handle Kit
21-300L	Silver Series Faucet Valve Repair Kit
23-157	Overflow Assembly
H-100	Chrome Plated 1-1/2" IPS P-Trap
H-101	Deck Mount Soap Dispenser
H-105	Wall Mount Towel Dispenser
H-108-2	17-1/4" Stainless Steel Skirt, Factory Installed
H-110	Side Support Brackets
H-111	16"W Soap & Towel Dispenser
H-116	Wall Mount Soap Dispenser
FG-L2	15"D Factory Installed Side Splashes, Left Side
FG-R2	15"D Factory Installed Side Splashes, Right Side
FG-LR2	15"D Factory Installed Side Splashes, Left & Right
SG-L2	15"D Field Installed Side Splashes, Left Side
SG-R2	15"D Field Installed Side Splashes, Right Side
SG-LR2	15"D Field Installed Side Splashes, Left & Right

⚠ Warning: This product can expose you to chemicals including lead and lead compounds which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



Standard Hand Sinks

Hand Sinks

HS-2L or HS-2-LS/RS Bowl Size: 14"W x 10"L x 5" Deep HS-2-LS/RS OPTIONAL SIDE SPLASH (LEFT OR RIGHT) Top View: 17 1/4" (H), 17 1/4" (C), 15 1/4" (D), 8 1/16" (F), 14" (G) Front View: 13" (H), 14" (G) Side View: 5" (I), 10" (J), 2" (K), 7 3/4" (L), 9 3/4" (M)	HS-2-LF Bowl Size: 14"W x 10"L x 5" Deep Top View: 17 1/4" (H), 17 1/4" (C), 15 1/4" (D), 8 1/16" (F), 14" (G) Front View: 13" (H), 14" (G) Side View: 5" (I), 10" (J), 2" (K), 7 3/4" (L), 9 3/4" (M)	HS-4 Bowl Size: 14"W x 10"L x 5" Deep Top View: 17 1/4" (H), 17 1/4" (C), 15 1/4" (D), 8 1/16" (F), 14" (G) Front View: 13" (H), 14" (G) Side View: 5" (I), 10" (J), 2" (K), 7 3/4" (L), 9 3/4" (M)
HS-10 Bowl Size: 12-1/2"W x 9-3/4"L x 5-5/8" Deep Top View: 15 3/4" (H), 15 3/4" (C), 15 1/4" (D), 7 7/8" (F), 12 1/2" (G) Front View: 19 1/4" (H), 12 1/2" (G) Side View: 5 5/8" (I), 9 3/4" (J), 2 1/4" (K), 7 3/4" (L), 19 1/4" (M)	HS-18 Bowl Size: 12-1/16"W x 9-1/2"L x 5-3/4" Deep Top View: 14 1/16" (H), 14 1/16" (C), 16 1/2" (D), 7 3/16" (F), 12 1/16" (G) Front View: 13 1/2" (H), 12 1/16" (G) Side View: 5 3/4" (I), 9 1/2" (J), 1" (K), 9 1/2" (L)	HS-20-LF Bowl Size: 12-1/2"W x 9-3/4"L x 5-5/8" Deep 3-1/2" Drain Top View: 15 3/4" (H), 15 3/4" (C), 15 1/4" (D), 7 7/8" (F), 12 1/2" (G) Front View: 13" (H), 12 1/2" (G) Side View: 5 5/8" (I), 9 3/4" (J), 2 1/8" (K), 7 3/4" (L), 9 3/4" (M)
HS-22 Bowl Size: 14"W x 10"L x 5" Deep Top View: 17 1/4" (H), 17 1/4" (C), 15 1/4" (D), 8 1/16" (F), 14" (G) Front View: 13" (H), 14" (G) Side View: 5" (I), 10" (J), 2" (K), 7 3/4" (L), 9 3/4" (M)	HS-34 Bowl Size: 14"W x 10"L x 5" Deep Top View: 17 1/4" (H), 17 1/4" (C), 15 1/4" (D), 8 1/16" (F), 14" (G) Front View: 13" (H), 14" (G) Side View: 5" (I), 10" (J), 2" (K), 7 3/4" (L), 9 3/4" (M)	HS-36 Bowl Size: 14"W x 10"L x 5" Deep Top View: 17 1/4" (H), 17 1/4" (C), 15 1/4" (D), 8 1/16" (F), 14" (G) Front View: 13" (H), 14" (G) Side View: 5" (I), 10" (J), 2" (K), 7 3/4" (L), 9 3/4" (M)
HS-43 Bowl Size: 14"W x 10"L x 5" Deep Top View: 17 1/4" (H), 17 1/4" (C), 15 1/4" (D), 8 1/16" (F), 14" (G) Front View: 13" (H), 14" (G) Side View: 5" (I), 10" (J), 2" (K), 7 3/4" (L), 9 3/4" (M)	Wall Bracket Included with all Hand Sinks Dimensions: 11" (H), 9 27/32" (G), 1 9/16" (F)	

13" x 17" Drop-In Sink

Hand Sinks



Model	Description
HS-1317	13" x 17" Drop-In Sink

Replacement Parts & Accessories


11-435L	4" Center Faucet w/ 4-1/2" Double Bend Spout
16-232L	Spout-Mount Eyewash
21-300L	Silver Series Faucet Valve Repair Kit
21-311L	Wrist Blade Handle Kit
21-196L	Deck Mounting Kit
21-198L	1/2" x 3/8" Braided Supply Hoses
21-451	Hands-Free Spout Valve
23-121	1-1/2" Full Flange Stainless Steel Drain
H-105	Wall Mount Towel Dispenser
H-116	Wall Mount Soap Dispenser

Specifications

Overall Size	▪ 13"W x 17"D x 5-3/8"H
Bowl	▪ 10"W x 12"D x 5-3/8"H deep drawn bowl
Faucet	▪ 4" center deck mount faucet with 4-1/2" double bend spout (11-435L) ▪ 1.8 GPM aerator
Drain	▪ 1-1/2" stainless steel drain
Material	▪ 16 gauge stainless steel top and bowl bottom ▪ 18 gauge stainless steel bowl apron
Plumbing	▪ 1/2" IPS hot and cold water ▪ 1-1/2" IPS drain outlet
Weight	▪ 8 lbs.

Product Compliance

- ASME A112.19.3/CSA B45.4
- NSF 2

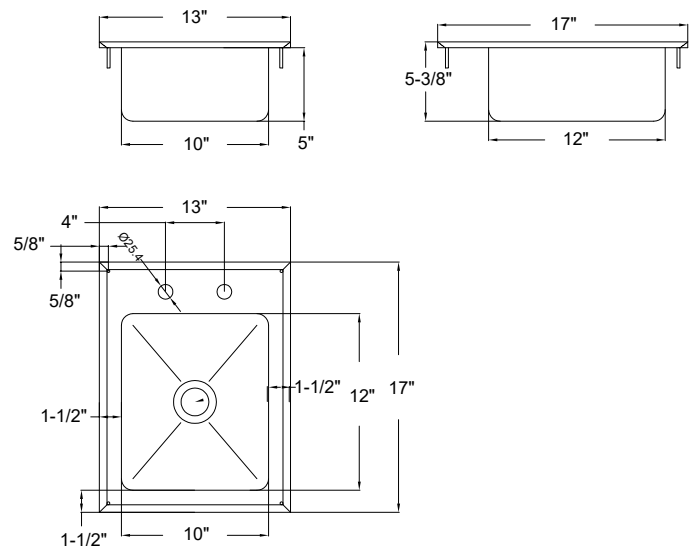

California Prop 65 Warning:

This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Food-prep sink: Raw animal protien
Food prep sink: Vegetables

REGENCY
Tables and Sinks

**Regency 22" One Compartment Commercial Sink with
Galvanized Steel Legs, and Faucet**

#600S117FW



Technical Data

Length	22 Inches
Width	23 13/16 Inches
Height	44 3/4 Inches
Spout Length	3 1/2 Inches
Bowl Depth	12 Inches
Backsplash Height	10 Inches
Spout Height	7 7/8 Inches
Work Surface Height	34 3/4 Inches
Basket Drain Size	3 1/2 Inches
Bowl Front to Back	17 Inches

Features

- Corrosion-resistant, durable 16 gauge, type 304 stainless steel construction
- Designed with a 17" x 17" x 12" sink bowl and rounded corners for easy cleaning
- Galvanized steel legs and adjustable plastic bullet feet provide stability
- Includes a chrome-plated copper faucet with an 8" gooseneck spout and a 3 1/2" basket strainer
- Backsplash and rolled edges prevent splashes and overflow

Certifications



NSF Certified




1/2" Water Connection

Technical Data

Bowl Left to Right	17 Inches
Drain Outlet Size	1 1/2 Inches
Faucet Centers	8 Inches
Features	NSF Certified
Flow Rate	2 GPM
Gauge	16 Gauge
Handle Type	Wrist
Included	Faucet
Leg Construction	Galvanized Steel
Material	Stainless Steel
Number of Compartments	1 Compartment
Number of Drainboards	None
Spout Type	Gooseneck
Stainless Steel Type	Type 304
Style	0 Drainboards
Water Inlet Size	1/2 Inches

Plan View

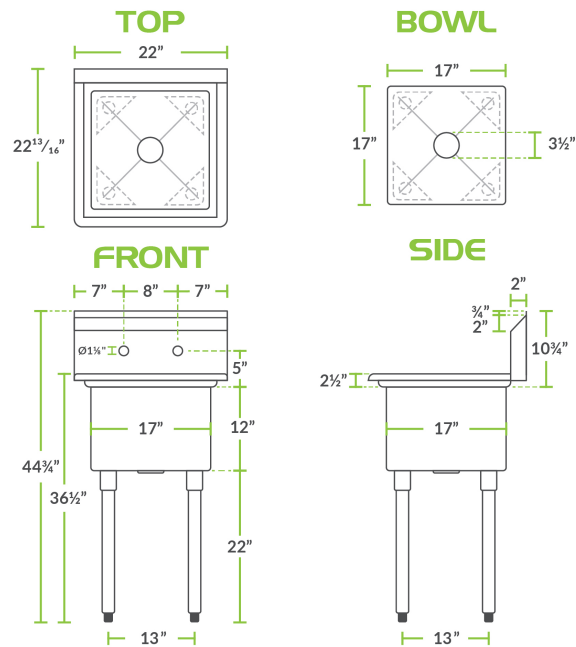

Notes & Details

Ideal for washing pots or prepping food, this Regency one compartment commercial sink is a great addition to your busy commercial kitchen. It is constructed from high-quality, 16 gauge, type 304 stainless steel, making it more corrosion-resistant and durable than other sinks made from thinner, 18 gauge material. This sink also features a welded construction for long-lasting use and overall strength.

Featuring a flow rate of 2 GPM and a 1/2" NPT connection, the included faucet is great for quickly filling up buckets and sink compartments for dishwashing and other general cleaning tasks. It has a chrome-plated copper construction that's attractive and easy to keep clean. The 17" x 17" x 12" sink bowl is die-stamped to a minimum of 1/4" to ensure proper drainage. Plus, it includes a 3 1/2" basket strainer to catch food debris, which prevents the drain from clogging. For easy cleaning, the compartment has rounded corners so you can rinse and wipe down the sink.

A 10" tall backsplash is included with two 1 1/8" diameter holes punched for easy installation of the included faucet. This sink also comes complete with a 1 1/2" raised rolled edge, which is 2" tall on the front and both sides to contain splashes and overflow. The legs are constructed of 1 5/8" diameter galvanized steel with galvanized leg sockets and adjustable plastic feet so you can install this sink to best fit your needs. The deck height is approximately 34". Designed for medium-duty use, this Regency sink is ideal for most restaurants.

 **WARNING:** This product can expose you to chemicals including Lead and Nickel, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.




Spa area floor sink

MUSTEE

Preferred by the "Pros"

Mop Service Basin — Model 63M

SEE PAGE 2 FOR A LIST OF ACCESSORIES!

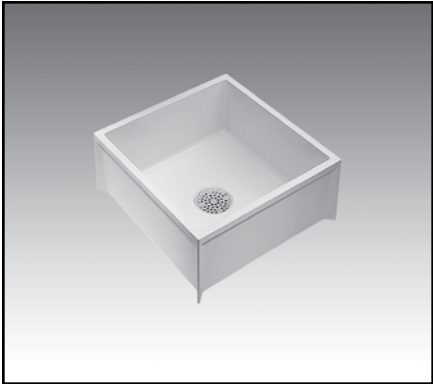

Design features:

- All Mustee basins are one-piece molded from high impact resistant DURASTONE® structural fiberglass (24" x 24")
- Integral, molded-in drain for connection to 3" ABS, PVC (Sch. 80) or cast iron
- Available drain seals for connection to 2" pipe or 3" soil pipe
- Complete range of accessories to meet specific application needs
- Colorfast marbleized white finish
- Easy to install

Code Accepted

Mustee Mop Service Basins meet or exceed performance requirements as listed:



- International Association of Plumbing and Mechanical Officials (IAPMO)® Listed
- Warnock Hersey® (Canada) Listed—CSA test standards: Mop Basins - #B45.0
- American National Standards Institute (ANSI)-Specification Z 124-2011
- American Society of Testing and Materials (ASTM) D 635 E 84 and E 162
- CAN/ULC S102-07 Burn and Smoke Test



Specifications

Model Number	Model	H x W x D	UPC
63M	White	10" x 24" x 24"	6 71031 00189 4

General: Furnish and install as shown on plans, Mop Service Basin model 63M, as manufactured by E.L. Mustee & Sons, Inc. Unit to be one-piece molded fiberglass made with matched metal molds using extreme heat and pressure. Height shall be 10" with not less than 1" wide shoulder. Size 24" x 24" Drain shall be integrally molded, complete with drain seal for installation of 3" ABS, PVC (Sch. #80) and iron pipe. Removable stainless steel strainer. Performance tested to meet or exceed ANSI Z 124-2011 and FHA/HUD UM-73. Weight 45 lbs., cubic feet 4.2. Install in compliance with local codes.

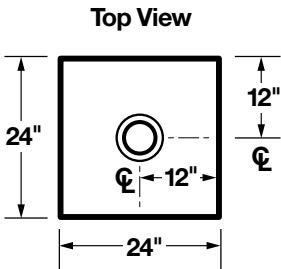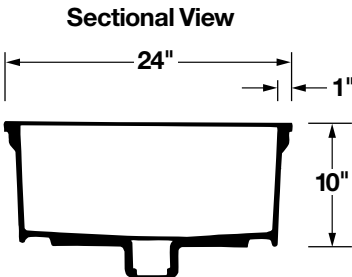


MUSTEE

E.L. Mustee & Sons, Inc. • 5431 West 164th Street • Brook Park, OH 44142 • Phone: 216.267.3100 • Fax: 216.267.9997
E-mail: info@mustee.com • Web: www.mustee.com • Proudly made in the USA

Notice: Our continuous commitment to product improvement may result in changes to product specifications without notice.
Patents pending. Made and Printed in U.S.A.



► **Service Faucet**



Model No.	UPC
63.600A	6 71031 00277 8
Heavy duty, chrome plated brass dual handle sink faucet with top reinforcing bar and pail hook on spout.	

► **Hose and Hose Holder**




Model No.	UPC
65.700	6 71031 00196 2
Heavy duty 5/8" dia. reinforced 31" rubber hose with brass couplings on one end. Spring loaded, molded rubber hose holder mounts on stainless steel wall plate.	

► **Mop Hanger**




Model No.	UPC
65.600	6 71031 00195 5
Three spring-loaded rubber holders mounted to a 3" x 24" stainless steel wall plate. Click here for more information.	

► **Bumper Guards**




Available in high impact resistant molded vinyl (3 versions) or stainless steel (2 versions).	
Model No.	UPC
High Impact-resistant vinyl	
63.401 20-3/4" Long	6 71031 00290 7
Stainless steel	
63.403 20-3/4" Long	6 71031 00409 3

► **DURAGUARD™ Wall Guards**



Protects wall surfaces from splashing and damage from impacts, 12" height, 20 gauge #304 stainless steel.	
Model No.	UPC
67.2424 Two panels & bracket for 24" x 24" corner	6 71031 00293 8
67.24C One panel & corner bracket	6 71031 00295 2

► **Optional Seals**



For installations with the following pipe connections:	
Model No.	UPC
65.308 For 2" PVC, ABS and iron	6 71031 00303 4
65.309 For 3" PVC, ABS and iron,(Included w/mop basin)	6 71031 00304 1
65.311 For 3" soil pipe (No-Hub)	6 71031 00305 8





700 Series (TPR) Rubber Wall Base

TECHNICAL DATA

PRODUCT DESCRIPTION

Finish & Appearance	Traditional Cove & No Toe Base Available in all Sizes				
Nominal Dimensions ¹	2 1/2" (6.35 cm) x 48" (1.22 m) or 120' (36.58 m) x 0.125" (3.2 mm) 4" (10.2 cm) x 48" (1.22 m) or 120' (36.58 m) x 0.125" (3.2 mm) 4 1/2" (11.4 cm) x 48" (1.22 m) or 120' (36.58 m) x 0.125" (3.2 mm) 6" (15.2 cm) x 48" (1.22 m) or 120' (36.58 m) x 0.125" (3.2 mm) 8" (20.3 cm) x 50' (15.24 m) x 0.125" (3.2 mm)				
Available Corner Options	Height	Cove OC	Cove IC	No Toe OC	No Toe IC
	2 1/2"	•	•	•	N/A
	4"	•	•	•	N/A
	4 1/2"	•	•	•	N/A
	6"	•	•	N/A	N/A
	8"	N/A	N/A	N/A	N/A
All available corners have 2 1/4" returns					

PRODUCT PERFORMANCE PROPERTIES

ASTM F1861 – Resilient Wall Base	Type TP, Group 2, Styles A & B
ASTM E648 (NFPA 253) – Critical Radiant Flux	Class I, $\geq 0.45 \text{ W/cm}^2$
ASTM E662 (NFPA 258) – Smoke Density	Passes, ≤ 450
ASTM E84 – Flammability	Class A
CAN/ULC-S102.2 – Surface Burning	10 Flame Spread Rating 60 Smoke Development Classification
ASTM F925 – Chemical Resistance ²	Excellent, Additional Chemical List available via chart
ASTM F137 – Flexibility	Excellent, No Crack or Break 1/4" Mandrel
ASTM F1515 – Light Stability	$\Delta E \leq 8$

PRODUCT INSTALLATION & WARRANTY INFORMATION

Lot Controlled	No
Suitable for In Floor Radiant Heat	Yes
Heat Weldable / Required	No
Indoor / Outdoor Suitability	Indoor Use Only
Service & Storage Temperature Range ³	60° - 85° F
Recommended Adhesives ⁴	Excelsior WB-600 Wall Base Adhesive Excelsior C-631 Contact Adhesive
Product Warranty ⁵	5 Year Limited Commercial Warranty



700 Series (TPR) Rubber Wall Base

TECHNICAL DATA

SUPPORT & ADDITIONAL DOCUMENTATION

Product Support Phone & Email	(800) 537 – 9527 / sales@roppe.com
Technical Support Phone & Email	(844) 393 – 4044 / solutions@rhctechical.com
Product Technical Documentation	www.roppe.com
Sustainability Documentation	Ecomedes Product Page
Associated or Related Documentation	Excelsior WB-600 Wall Base Adhesive Excelsior C-631 Contact Adhesive 700 Series Wall Base Installation Wall Base Care & Maintenance Roppe Products Warranty

¹ Nominal dimensions are the marketed dimensions of the product. Tolerances are allowed in the manufacturing process and our tolerance range is what is allowed by the ASTM documentation overseeing the product construction.

² ASTM F925 testing is utilized to ensure flooring materials will stand up to certain household standard chemistries. Additional chemical resistance testing performed using this test method is for informational and guidance purposes only. Proper maintenance will affect chemical resistance, but the best defense against a negative effect is to clean the drop/spill from the flooring surface immediately.

³ See installation documents for full installation details regarding approved substrates, job site conditions and acclimation procedures.

⁴ Recommended adhesives listed are recommended to be used to obtain the full listed system warranty that includes a bond performance warranty. Material installed with adhesives other than those listed here or an approved option in writing will only have a product manufacturing and wear warranty, no performance or bond warranty.

⁵ See product warranty for full details regarding limitations and warranty coverage.

The contents contained within this Technical Data Sheet (TDS) may be utilized or copied into another projected related document. While this original document will remain in effect at the time of product installation, this TDS shall not be supplemented or replaced by the resulting project documentation. Any alterations to the wording or requirements contained in or derived from this document shall void all related warranties.

See installation information and documents for full installation details regarding substrates, job site conditions, & acclimation procedures. The intent of this document is to provide technical and performance properties of the mentioned adhesive and define the intended method of installation for the products in which the adhesive is approved for use. Any installation guidelines are to be considered as a starting point at a minimum for a successful installation. We rely on the expertise and professionals that are installing the products to adjust based on site conditions. Anything that appears to be a link, is and leads to additional information if necessary or provides a means of contact in the event there are any additional questions. Before accepting this document, refer to the product website to confirm that you have the most current revision.

These products are intended for installation by professionals. Prior to use the user must determine the suitability of our products for the intended use, and the user alone assumes all risks and liability.