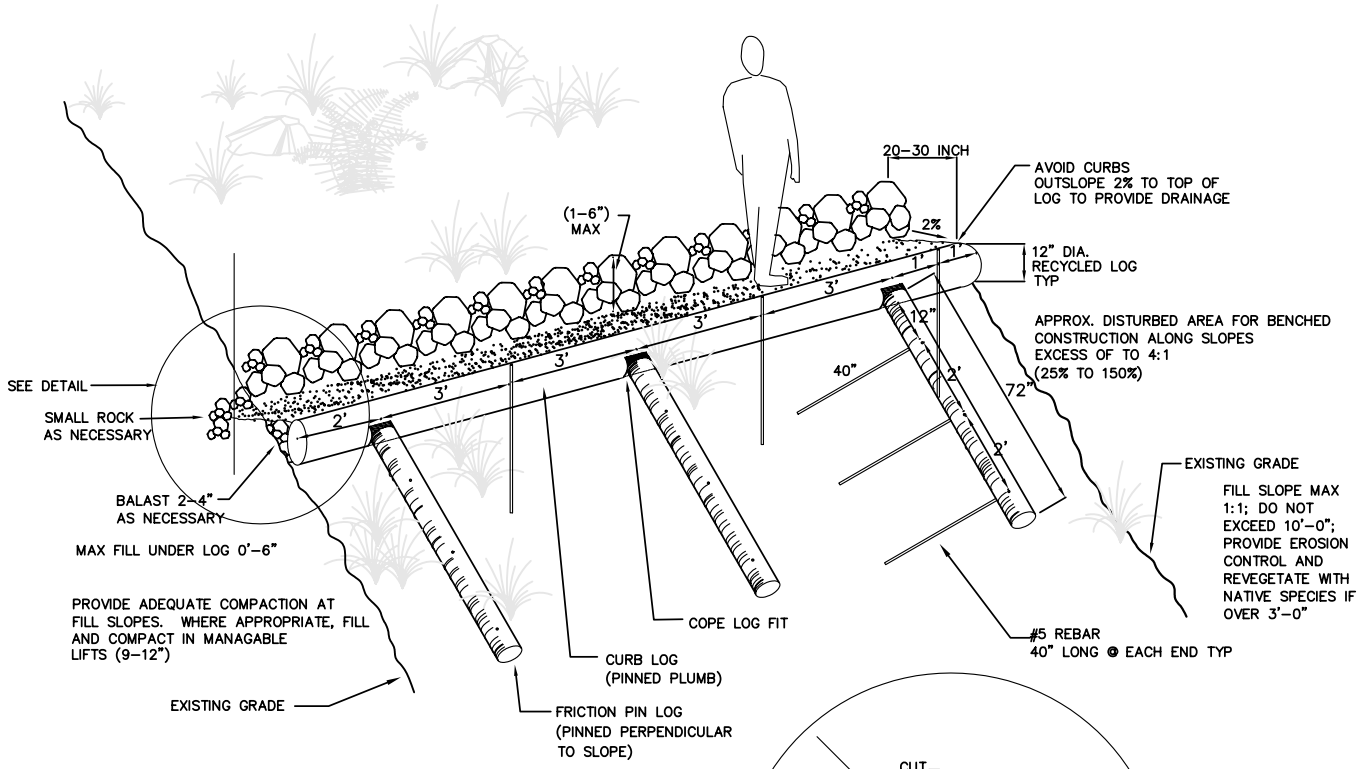

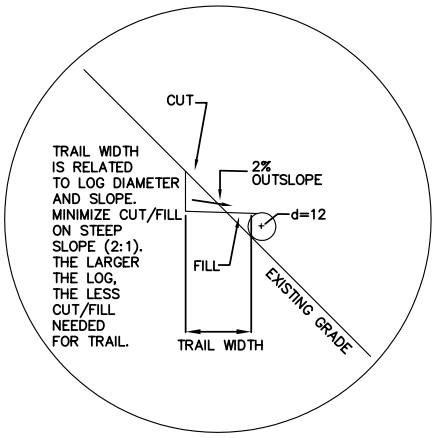

NOTES:

THIS DETAIL TO BE USED ONLY WITH AUTHORIZATION OF TRAIL ENGINEER. ALL LOGS MUST BE FROM AN APPROVED SOURCE.

TYPICAL 48" WIDTH STANDARD TRAIL (NARROW AS FIELD CONDITIONS NECESSITATE) TREAD ON CROSS-SLOPE. PROVIDE MINIMUM 4" COMPACTED DEPTH OF APPROVED ⅝" MINUS FRACTURED CRUSHED AGGREGATE. INSTALL ON APPROVED MINERAL SOIL BASE (EXCAVATE ORGANIC MATERIAL). PROVIDE TREAD CROSS-SLOPE OF MINIMUM 2% UNLESS TRAIL SLOPES LONGITUDINALLY. CROSS-SLOPE TO DITCH IF SPECIFIED, OR DOWN-SLOPE IF NO DITCH SPECIFIED.

TRAIL CROSS SLOPE TO EQUAL 2% IN ALL INSTANCES; TREAD INCLINE SHOULD NOT EXCEED 1:6; 2% OUTSLOPE.

City of Seattle Department of Parks & Recreation	**FRICTION PIN LOG DETAIL** **STD. DETAIL NO. 32 60 00.33**