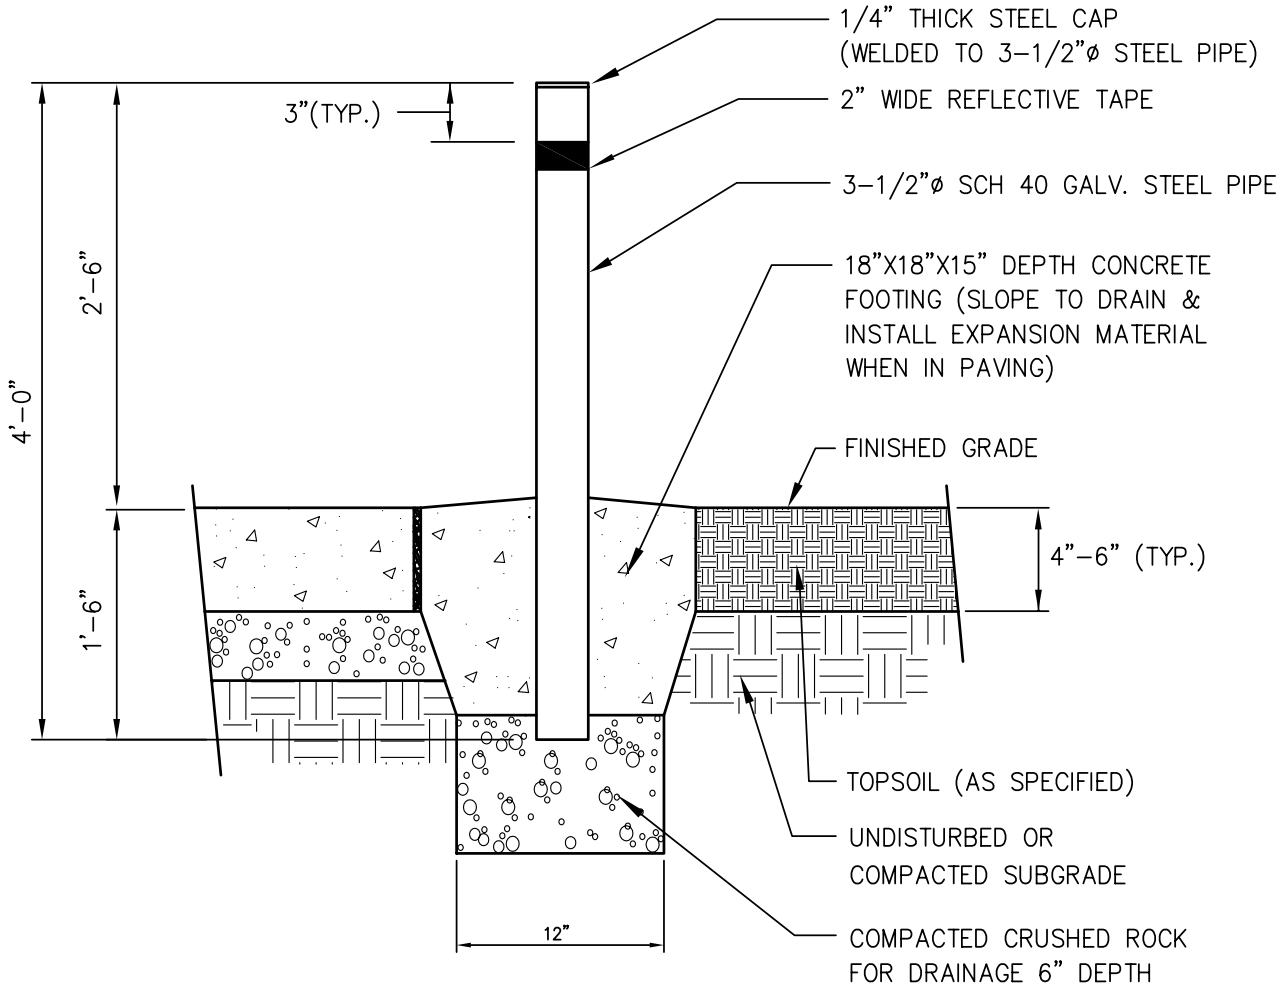

BOLLARD ELEVATION

X FIXED STEEL BOLLARD - SMALL

N.T.S.

NOTE: All pipe sections shall constructed of schedule 40 steel pipe and all components shall be hot dipped galvanized after fabrication.

City of Seattle Department of Parks & Recreation	**FIXED STEEL BOLLARD DETAIL** **STD. DETAIL NO. 12 93 63.26**